ACQUISTA PRODOTTI
DI STAGIONE
- contengono più vitamine
- sono più gustosi
- costano meno all'ambiente e a te
INVERNO

FILE PRO

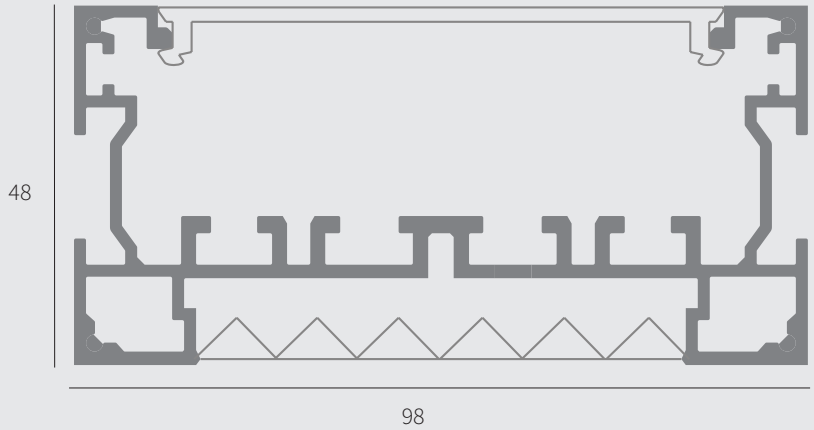

1:1

SEZIONE PROFILO/SECTION PROFILE

FILE PRO

Corpi illuminanti lineari, in estruso di alluminio 98x48mm, per installazione a sospensione o su binario trifase elettrificato. Finitura verniciata testurizzata. Schermi per luce diffusa in policarbonato opalino, ottiche con diverse aperture del fasci. Grado di protezione IP40.

Linear lighting fixtures, in extruded aluminum 55x55mm, for ceiling, suspension. Embossed painted finish. Screens for diffused light in opal polycarbonate, for the PRO version are available optics with different beam openings. IP40. Available default modules and modular system.

UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION /
UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION

PRODOTTI COSTRUITI CON MATERIALE RECICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL

5 **GARANZIA DI 5 ANNI /** 5-YEAR WARRANTY

FINITURE/FINISHINGS

01-BIANCO/WHITE

02-NERO/BLACK

12-GRIGIO/ GREY

FINITURE PREMIUM /PREMIUM FINISHINGS

81-ORO ROSA/ PINK GOLD

82-BRONZO/ BRONZE

83-OTTONE SATINATO / BRUSHED BRASS

KELVIN

2700°K

3000°K

4000°K

CURVE FOTOMETRICHE/*PHOTOMETRIC DATA*

NR - LENS 30°



WI - LENS 60°

UGR <19



EW - LENS EXTRA WIDE 100°



DF - LENS DIFFUSED



SA - LENS SINGLE ASYM



DA - LENS DOUBLE ASYM



FILE PRO

SOSPENSIONE
SUSPENSION

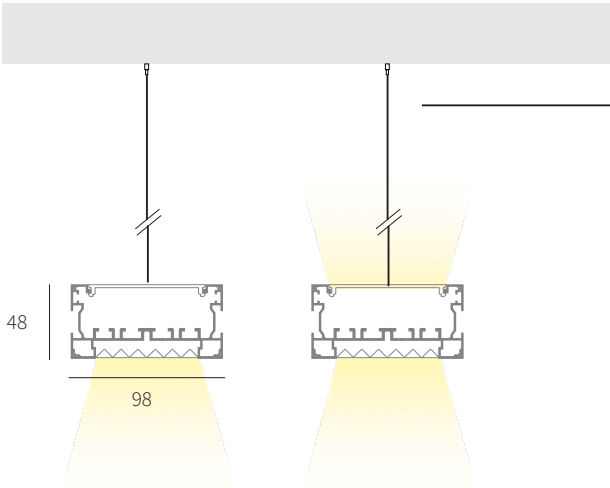

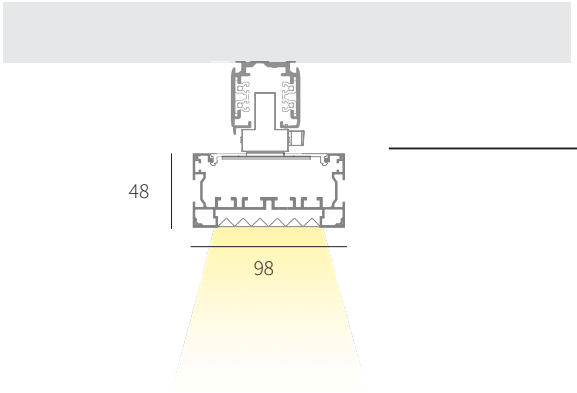

VERSIONI DISPONIBILI/AVAILABLE VERSION

KELVIN

27	2700K
30	3000K
40	4000K

FASCIO/BEAM

NR	Narrow 30°
WI	Wide 60° UGR<19
EW	Extra Wide 110°
DF	Diffused
SA	Single Asymmetric
DA	Double Asymmetric

DIMMABLE (OPTIONAL)

D Dali Touch & Dimm

SU RICHIESTA ON DEMAND

E Versione ad emergenza / Emergency version

D10 Dimmerabile 1-10V / Dimmable 1-10V

CA Sistema di controllo CASAMBI / CASAMBI control system

luce indiretta su richiesta/ indirect light on demand

/ ## FINITURA / FINISHING

/01 bianco/white

/02 nero/black

/12 grigio/grey

FILE PRO SOSPENSIONE

SUSPENSION MOUNTED





LED			Lumen product 3000K/Beam						
W	L.mm	Kg	DF	EW	WI	NR	SA	DA	CODE
22			3052	3441	3677	3674	3485	3607	**FP001.9** ●●● /##
43,4	1150	4,3	6105	6882	7320	7348	6971	7215	**FP002.9** ●●● /##
64			8250	9300	9870	9930	9420	9750	**FP003.9** ●●● /##
28,7			3821	4308	4604	4600	4363	4516	**FP004.9** ●●● /##
57,4	1440	5,2	7644	8614	9165	9200	8728	9034	**FP005.9** ●●● /##
82			10330	11645	12358	12434	11795	12208	**FP006.9** ●●● /##
33,6			4580	5164	5518	5514	5230	5413	**FP007.9** ●●● /##
67,2	1726	5,4	9162	10328	10986	10971	10462	10828	**FP008.9** ●●● /##
96			12382	13958	14813	14903	14138	14633	**FP009.9** ●●● /##
56			7611	8581	9170	9162	8691	8995	**FP010.9** ●●● /##
112	2870	10	15225	17163	18255	18325	17385	17993	**FP011.9** ●●● /##
160			20574	23193	24614	24764	23492	24315	**FP012.9** ●●● /##

FILE PRO TRACK

TRACK MOUNTED



LED			lumen product 3000K/BEAM						
W	L.mm	Kg	DF	EW	WI	NR	SA	DA	CODE
11,2			1158	1756	1877	1875	1779	1841	**FP013.9** ●●● /##
21,4	582	3,2	3116	3513	3737	3751	3558	3683	**FP014.9** ●●● /##
32			4211	4747	5038	5069	4809	4977	**FP015.9** ●●● /##
22			3052	3441	3677	3674	3485	3607	**FP016.9** ●●● /##
43,4	1150	4,3	6105	6882	7320	7348	6971	7215	**FP017.9** ●●● /##
64			8250	9300	9870	9930	9420	9750	**FP018.9** ●●● /##
28,7			3821	4308	4604	4600	4363	4516	**FP019.9** ●●● /##
57,4	1440	5,2	7644	8614	9165	9200	8728	9034	**FP020.9** ●●● /##
82			10330	11645	12358	12434	11795	12208	**FP021.9** ●●● /##
33,6			4580	5164	5518	5514	5230	5413	**FP022.9** ●●● /##
67,2	1726	5,4	9162	10328	10986	10971	10462	10828	**FP023.9** ●●● /##
96			12382	13958	14813	14903	14138	14633	**FP024.9** ●●● /##

FILE PRO

SISTEMA
SYSTEM

COMPOSIZIONE CODICE: xxx.x ●●●/##
HOW TO CREATE THE CODE: **F1000.827SD/01**

CODE

F1000.8 ● ● ● **/##** — finishing

base code | kelvin | beam | dimmable

.misura sostituire con la misura necessaria in mm. /
replace with the required measure in mm.

/## FINITURA/FINISHING

/01 bianco/white

/02 nero/black

/12 grigio/grey

PROFILO LUMINOSO COMPRESO DI OTTICA LIGHTING MODULES PROFILE, OPTIC INCLUDED



LED				Lumen product 3000K/Beam						
W	Dim.	L.mm	Kg	DF	EW	WI	NR	SA	DA	CODE
64	98x48	1144	4,1	8250	9300	9870	9930	9420	9750	**FP025.9 /##**
82	98x48	1430	4,7	10330	11645	12358	12434	11795	12208	**FP026.9 /##**
96	98x48	1716	5,2	12382	13958	14813	14903	14138	14633	**FP027.9 /##**
160	98x48	2860	8	20574	23193	24614	24764	23492	24315	**FP028.9 /##**

Finitura testurizzata | Embossed finishing

PROFILO VUOTO EMPTY PROFILE



CODE
FP029.misura /##

COPPIA TESTATE COUPLE OF HEAD



CODE
FP050/##

KIT CAVO D'ACCIAIO DI SOSPENSIONE KIT SUSPENSION STEEL CABLE

H	CODE
2000	**FP051.2000**
4000	**FP051.4000**

KIT ALIMENTAZIONE COMPLETO DI ROSONE BIANCO POWER CABLE KIT WITH CEILING WHITE CANOPY



Dim.	Kg	CODE L. 2000 mm	CODE L.4000 mm
3X0,75	0.18	**LT2411/01**	**LT2411.4000/01**
4X0,75	0.26	**LT2412/01**	**LT2412.4000/01**
5X0,75	0.30	**LT2412.5/01**	**LT2412.5.4000/01**
7X0,75	0.30	**LT2412.7/01**	**LT2412.7.4000/01**
9X0,75	0.30	**LT2412.9/01**	**LT2412.9.4000/01**

COPPIA GIUNTI LINEARI LINEAR JOINTS COUPLE

CODE
FP052

COVER DI CHIUSURA VANO SUPERIORE UPPER SIDE COVER

L.mm	CODE
1000	**LT2506P.1000**
2000	**LT2506P.2000**
3000	**LT2506P.3000**
------	**LT2506P.misura**

KIT D'AGGANCIO LEVA QUADRA KIT TO USE AS FIXING POIN FOR LEVA QUADRA

CODE
FP055