




IPIPEDI

Collezione di apparecchi per esterni da soffitto, sospensione e parete per illuminazione diretta o diretta/indiretta, completi di sorgenti LED professionali o per lampade LED GU10 230V. Completati di gruppo di alimentazione. Corpo cilindrico in estruso di alluminio finitura verniciata. Completati di staffa per fissaggio a soffitto, o basetta di fissaggio a parete a seconda dei modelli. Grado di protezione IP54.

Ceiling, suspended or wall luminaires for direct or direct/indirect lighting, complete with professional LED sources or GU10 230V LED bulbs. Integrated power supply unit. Cylindrical body in extruded aluminum with painted finish. Complete with ceiling mounting brackets or wall fixing base according to the models. IP54.

LAMPADA DA SOFFITTO - CEILING LAMP

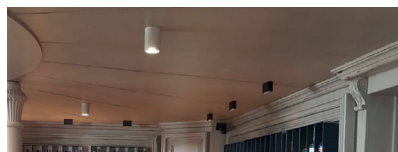

LAMPADA DA PARETE - WALL LAMP



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY




VERSIONI CON SORGENTE LED GU10 DISPONIBILI / AVAILABLE GU10 LIGHT SOURCE VERSION

KELVIN	
27	2700°K
30	3000°K
35	3500°K
40	4000°K

FASCIO/BEAM	
F	FLOOD
W	WIDE

FINITURE STANDARD / STANDARD FINISHINGS	
/01	BIANCO/WHITE
/02	NERO/BLACK
/60	CORTEN
/99	GRAFITE/GRAPHITE

CURVE FOTOMETRICHE/PHOTOMETRIC DATA

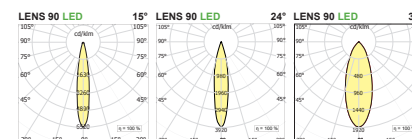


IPIPEDI

PARETE | WALL GU10





Ø55

R55A PARETE MONO EMISSIONE | SINGLE EMISSION WALL



	GU10 LED 230V			
	W	Ø	H	
	50	55	163	CODE PP040/##

R55A2 PARETE BI EMISSIONE | DOUBLE EMISSION WALL



	GU10 LED 230V			
	W	Ø	H	
	50	55	227	CODE PP041/##

COMPOSIZIONE CODICE: xxx.x/##

HOW TO CREATE THE CODE: F1000/01

CODE
F1000 /## — finishing

base code

/## FINITURA/FINISHING

- /01 bianco/white
- /02 nero/black
- /60 corten
- /99 grafite/graphite

OUTDOOR




IPIPEDI

PARETE | WALL LED

Ø90

I-PIPEDI R90A PARETE MONO EMISSIONE SINGLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



LED W 17	Ø 90	H 204	Im product/beam:3000K F24° W38° 1827 1905	CODE PP521.9 ● ● ● /##
----------------	---------	----------	---	---------------------------

I-PIPEDI R90A2 PARETE BI EMISSIONE DOUBLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



LED W 2x17	Ø 90	H 350	Im product/beam:3000K F24° W38° 3654 3810	CODE PP621.9 ● ● ● /##
------------------	---------	----------	---	---------------------------

● KELVIN

27 2700K
30 3000K
35 3500K
40 4000K

Per i gradi vedere in tabella -
For degrees check the table

COMPOSIZIONE CODICE: xxx.x ● ● ● /##
HOW TO CREATE THE CODE: F1000.82750/01

CODE
F1000.8 ● ● ● /## — finishing
base code kelvin beam dimmable

● FASCIO/BEAM

F Flood
W Wide

DIMMABLE (OPTIONAL)

● D Dali

/## FINITURA/FINISHING

01 bianco/white
02 nero/black
60 corten
99 grafite/graphite

OUTDOOR

IPIPEDI

SOFFITTO | CEILING



Ø90 H90

I-PIPEDI R90 H90 SOFFITTO CEILING





							IK10		LED	IP54	5W	A	A	5	UK	CE
LED	W	ø	H	Kg	Im product/beam 3000K F24° W38°		CODE									
12		90	90	1,0	1289	-	PP165IP.9		●	●	●	/##				
17		90	90	1,4	1827	1905	PP166IP.9		●	●	●	/##				
24,3		90	90	1,4	2356	2430	PP167IP.9		●	●	●	/##				

Ø90 H300

I-PIPEDI R90 SOFFITTO CEILING

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



ing/leading edge dimmable included in Led base version.

						IK10LEDIP545WAA5ULCE	
LED					Im product/beam 3000K		
W	ø		H		F24°W38°	CODE	
17	90		300		18271905	PP421.9	●●●/##

						IK10LEDIP545WAA5ULCE	
GU10LED 230V							
W	ø		H			CODE	
1x max 50	90		300			PP422	/##

KELVIN

27	2700K
30	3000K
35	3500K
40	4000K

FASCIO/BEAM

F	Flood
W	Wide

Per i gradi vedere in tabella -
For degrees check the table

DIMMABLE (OPTIONAL)

D	Dali
---	------

/## FINITURA/FINISHING

/01	bianco/white
/02	nero/black
/60	Corten
/99	grafite/graphite

COMPOSIZIONE CODICE: xxx.x ● ● ● /##
HOW TO CREATE THE CODE: F1000.8275/01

CODE				
F1000.8	●	●	●	/##
base code	kelvin	beam	dimmable	finishing

OUTDOOR