






WALL-CEILING
SUSPENSION - FLOOR

IBRIDA TERRA | FLOOR

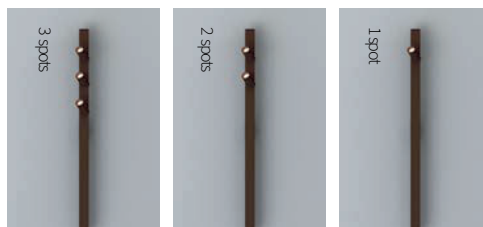


FINITURA | FINISHING

- /01 bianco | white
- /02 nero | black
- /49 bronzo | bronze

FINITURA PREMIUM | PREMIUM FINISHING


- /81 oro rosa | rose gold
- /82 bronzo anticato | antique bronze
- /83 ottone brunito spazzolato /brushed burnished brass

LUCE INDIRETTA | INDIRECT LIGHT



LED W	H	lm product/beam 3000K	CODE
17 indirect	2200	1590	IB000.9 ● ● ● /##


LUCE SPOT DIRETTA | DIRECT SPOT LIGHT



LED W	H	lm product/beam 3000K	S19°	F28°	Z18°x38°	CODE
8	2200	665	695	508		IB001.9 ● ● ● /##
16	2200	1330	1390	1016		IB002.9 ● ● ● /##
24	2200	1995	2085	1524		IB003.9 ● ● ● /##

Accessori - accessories: IB100: Modulo comandi + Command module

LUCE DIRETTA E INDIRETTA | DIRECT AND INDIRECT LIGHT



LED W	H	lm product/beam 3000K	S19°	F28°	Z18°x38°	CODE
17 indirect	2200	1590				IB011.9 ● ● ● /##
+ 1 spot 8 direct	2200	665	695	508		
17 indirect	2200	1590				IB012.9 ● ● ● /##
+ 2 spots 16 direct	2200	1330	1390	1016		
17 indirect	2200	1590				IB013.9 ● ● ● /##
+ 3 spots 24 direct	2200	1995	2085	1524		

Accessori - accessories: IB100: Modulo comandi + Command module

ACCESSORI | ACCESSORIES



MODULO COMANDI | COMMAND MODULE **accensione/dimmerazione** | switch on/off & dimmable

CODE
IB100 /##

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K



● FASCIO/BEAM

- S Spot
- F Flood
- Z Asymmetric

● DIMMABLE (OPTIONAL)

- D Dali


Per i gradi vedere in tabella -
For degree check the table

COMPOSIZIONE CODICE: xxx.x ● ● ● /##

HOW TO CREATE THE CODE: **F1000.827S/01**


CODE
F1000.8 ● ● ● /## — finishing
base code kelvin beam dimmable

WALL - CEILING
SUSPENSION - FLOOR

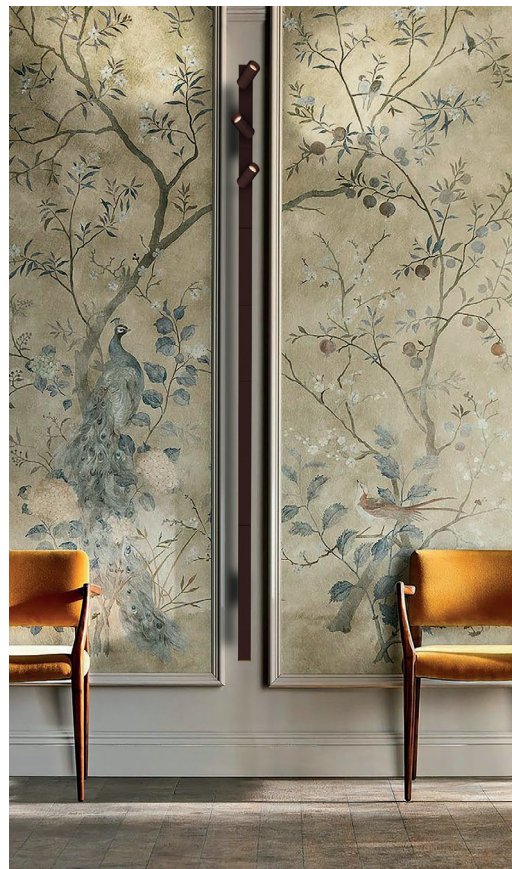

IBRIDA PARETE | WALL

LUCE INDIRETTA | INDIRECT LIGHT



LUCE SPOT DIRETTA | DIRECT SPOT LIGHT



IBRIDA


Ibrida è una collezione di prodotti da parete o da terra che permette grande personalizzazione. Esiste proposta in moduli finiti, ma è tramite il sistema componibile che raggiunge la sua massima espressione. Caratterizzato da un profilo di alluminio che ospita una linea led che può essere installata sia diretta che indiretta, completo di diffusore in policarbonato opalino. Possibilità di aggiungere sino a 3 proiettori Focus per una luce diretta e puntuale. IP20

Hybrid is a wall or floor lamp collection that allows great customization. It exists in default modules, but it is through the modular system that reaches its maximum expression. Characterized by an aluminum profile that houses a led line both direct and indirect, complete with opal polycarbonate diffuser. Possibility to add spotlights Focus for a direct and punctual light. IP20


LUCE DIRETTA E INDIRETTA | DIRECT AND INDIRECT LIGHT




LUCE INDIRETTA | INDIRECT LIGHT



LUCE SPOT DIRETTA | DIRECT SPOT LIGHT



LUCE DIRETTA E INDIRETTA | DIRECT AND INDIRECT LIGHT



LED W	Lmm	Wmm	Hmm	Im product/beam 3000K	CODE
4,5	40	126	450	386	IB020.9 ●●●/##
LED W	Lmm	Pmm	Hmm	Im product/beam 3000K	CODE
9	40	126	900	835	IB021.9 ●●●/##
LED W	Lmm	Pmm	Hmm	Im product/beam 3000K	CODE
17	40	126	1800	1590	IB022.9 ●●●/##

LED W	Lmm	Pmm	Hmm	Im product/beam 3000K	CODE
1 x 8	40	126	450	665 695 508	IB023.9 ●●●/##
LED W	Lmm	Pmm	Hmm	Im product/beam 3000K	CODE
1 x 8	40	126	900	665 695 508	IB024.9 ●●●/##
LED W	Lmm	Pmm	Hmm	Im product/beam 3000K	CODE
1 x 8	40	126	1800	665 695 508	IB025.9 ●●●/##
2 x 8	40	126	1800	1330 1390 1016	IB026.9 ●●●/##
3 x 8	40	126	1800	1995 2085 1524	IB027.9 ●●●/##

Accessori - accessories: IB100: Modulo comandi + Command module

LED W	ø	H	Im product/beam 3000K	CODE
4,5 indirect		450	386	IB028.9 ●●●/##
+ 1 spot x 8 direct	36		S19° F28° Z18°x38° 665 695 508	
LED W	ø	H	Im product/beam 3000K	CODE
9 indirect		900	835	IB029.9 ●●●/##
1 spot x 8 direct	36		S19° F28° Z18°x38° 665 695 508	
LED W	ø	H	Im product/beam 3000K	CODE
17 indirect		1800	1590	IB031.9 ●●●/##
+ 1 spot x 8 direct	36		S19° F28° Z18°x38° 665 695 508	
17 indirect		1800	1590	IB032.9 ●●●/##
+ 2 spots 16 direct	36		S19° F28° Z18°x38° 1330 1390 1016	
17 indirect		1800	1590	IB033.9 ●●●/##
+ 3 spots x 24 direct	36		S19° F28° Z18°x38° 1995 2085 1524	

ACCESSORI | ACCESSORIES

Accessori - accessories: IB100: Modulo comandi + Command module



MODULO COMANDI | COMMAND MODULE **accensione/dimmerazione** | switch on/off & dimmable

CODE
IB100 /##



250

/## FINITURA | FINISHING

- 01 bianco | white
- 02 nero | black
- 49 bronzo | bronze

/## FINITURA PREMIUM | PREMIUM FINISHING

- 81 oro rosa | rose gold
- 82 bronzo antico | antique bronze
- 83 ottone brunito spazzolato/brushed burnished brass

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

● FASCIO/BEAM

- S Spot
- F Flood
- Z Asymmetric

● DIMMABLE (OPTIONAL)

- D Dali

COMPOSIZIONE CODICE: xxx.x ●●●/##

HOW TO CREATE THE CODE: **F1000.827S●/01**

CODE
F1000.8 ●●●/## — finishing
base code kelvin beam dimmable

Per i gradi vedere in tabella -
For degree check the table

WALL-CEILING
SUSPENSION - FLOOR

251

IBRIDA

SISTEMA | SYSTEM



WALL - CEILING
SUSPENSION - FLOOR

IBRIDA SISTEMA | SYSTEM

SPOTS

EMPTY PROFILE

COVER


DIFFUSER

REGLETTE /LED

PROFILO VUOTO COMPLETO DI ATTACCO A MURO / EMPTY PROFILE COMPLETE WITH WALL MOUNTS



Lmm	Kg	CODE
450	0.95	IB000.450 /##
900	2.00	IB000.900 /##
1800	2.60	IB000.1800 /##



COPIA DI TESTATE PER PROFILO / COUPLE OF CLOSURE HEADS



CODE
LT248/##

254

REGELETTE

FILE SISTEMA REGLETTE LED 24W/M / 24W/M LED BATTEN



Alimentatore incluso | Driver included

LED 24W/m		Im product 3000K/diffuser		
W	Lmm	with opal diffuser	with microprismatic diffuser	CODE
12,8	560	721	964	R18FM0.8** ● ●
19,2	840	1082	1446	R18FM1.8 ● ● ●
25,6	1120	1442	1928	R18FM2.8 ● ● ● ●
32	1400	1803	2410	R18FM3.8 ● ● ● ● ●
38,4	1680	2163	2892	R18FM4.8 ● ● ● ● ● ●
44,8	1985	2524	3374	R18FM5.8 ● ● ● ● ● ● ●
51,2	2240	2884	3856	R18FM6.8 ● ● ● ● ● ● ● ●

* Note: Disponibile per le seguenti misure: 560, 1120, 1680, 2240mm. Gli apparecchi con temperatura di colore variabile (Tunable White) vengono forniti comprensivi di alimentatore DALI | Available for the following sizes: 560, 1120, 1680, 2240mm. The devices with variable color temperature (Tunable White) are supplied with integrated DALI power supply.
Attenzione: non abbinare le reglette dimmerabili con codici R18FM0.8#D alle altre reglette di misura superiore perché potrebbero avere un comportamento differente durante la dimmerazione. |
* Attention: do not combine dimmable modules with codes R18FM0.8#D with other larger modules because they might have different dimming results.

FILE SISTEMA REGLETTE LED 32W/M / 32W/M LED BATTEN



Alimentatore incluso | Driver included

LED 32W/m		Im product 3000K/diffuser		
W	Lmm	with opal diffuser	with microprismatic diffuser	CODE
18	560	1119	1309	R18FH0.9 ● ●
27	840	1679	1964	R18FH1.9 ● ● ●
36	1120	2238	2618	R18FH2.9 ● ● ● ●
45	1400	2798	3273	R18FH3.9 ● ● ● ● ●
54	1680	3357	3927	R18FH4.9 ● ● ● ● ● ●
63	1960	3917	4582	R18FH5.9 ● ● ● ● ● ● ●
72	2240	4476	5236	R18FH6.9 ● ● ● ● ● ● ● ●
81	2520	5036	5891	R18FH7.9 ● ● ● ● ● ● ● ● ●
90	2800	5595	6545	R18FH8.9 ● ● ● ● ● ● ● ● ● ●

○ 2700K non disponibile | 2700K not available

LINEA DI LUCE DA 5 METRI/ LED LINE 5 METERS ROLL



Strip led ad alta efficienza con biadesivo e supporto di larghezza 8-12 mm su bobina da 5 metri, da alimentare con driver stabilizzati in tensione da 24Vdc. Classe di isolamento III. | High efficiency strip led with biadhesive and support of 8-12 mm wide on 5 meters roll. To be fed with 24Vdc voltage-stabilized driver. Insulation class III.

CUTS		8	12	10
8	8,33	8	28	33,3
4,8W	9,6W	16,8	19,2W RGBW	22W

Linea di luce RGB - RGBW 24V									
W/m	V	Led/m	Im/m	Im/W	CRI	IP	Lmm	CODE	
4,8	24	120	620	129	90	20	5000	ST05.0.5	
9,6	24	160	1220	127	90	20	5000	ST10.0.5	
22	24	240	2700	123	90	20	5000	ST22.0.5	
16,8	24	COB	1400	84	90	20	5000	ST22.TW.5	

Linea di luce Led IP67 24V									
W/m	V	Led/m	Im/m	Im/W	CRI	IP	Lmm	CODE	
9,6	24	160	1073	111	90	67	5000	ST10.0.5IP	
16,8	24	200	1822	108	90	67	5000	ST18.0.5IP	

DISSIPATORE DIRETTO PER STRIP LED/ DIRECT EMISSION HEATSINK FOR STRIP LED MOLLA SINGOLA PER DISSIPATORE/ SINGLE SPRING



molle incluse/ included springs	Lmm	CODE
n.2	1000	LTC1.1000/27
n.3	2000	LTC1.2000/27
n.3	3000	LTC1.3000/27
----	----	LTC1.misura/27




CODE
LTC1.ML

1 ogni metro / 1 every meter

In caso di tagli ordinare altre molle / Should you need to cut on-site, please order more springs

/## FINITURA | FINISHING



/01 bianco | white

/02 nero | black

/49 bronzo | bronze

/## FINITURA PREMIUM | PREMIUM FINISHING

/81 oro rosa | rose gold

/82 bronzo anticato | antique bronze

/83 ottone brunito spazzolato/brushed burnished brass

DRIVERS VEDI | SEE P. 452

WALL-CEILING
SUSPENSION - FLOOR

MODULI PROIETTORI / PROJECTORS MODULES



LED			lm product/beam	3000K			CODE
W	mA		S19°	F28°	Z18°x38°		
1x 8	700		665	695	508		IB041.9 /##
2x 8	700		1330	1390	1016		IB042.9 /##
3x 8	700		1995	2085	1524		IB043.9 /##

MODULO COMANDI | COMMAND MODULE **accensione/dimmerazione** | switch on/off & dimmable



CODE
IB100. /##

DIFFUSORE IN POLICARBONATO OPALINO PER LUCE DIRETTA / OPAL DIRECT WHITE POLYCARBONATE DIFFUSER



Lmm	Kg	CODE
1000	0.16	LT239P.1000
2000	0.33	LT239P.2000
3000	0.50	LT239P.3000
-----		LT239P.misura

PIASTRA DI CHIUSURA IN ESTRUSO DI ALLUMINIO / EXTRUDED ALUMINIUM CLOSING COVER



Molle include/springs included	Lmm	CODE
n. 2	1000	F16.1000/##
n. 3	2000	F16.2000/##
n. 4	3000	F16.3000/##
-----		F16.misura/##

MOLLA PER PIASTRA DI CHIUSURA / SPRING FOR CLOSING COVER



CODE
F1.MLC

Una ogni 70 cm da ordinare solo in caso di tagli della piastra di chiusura | One every 70 cm. To be ordered in case of cut of the closing cover.

DIFFUSORE IN POLICARBONATO OPALINO INDIRETTO / OPAL INDIRECT WHITE POLYCARBONATE DIFFUSER



Lmm	Kg	CODE
1000	0.16	LT240P.1000
2000	0.33	LT240P.2000
3000	0.50	LT240P.3000
-----		LT240P.misura



/## FINITURA | FINISHING

- /01 bianco | white
- /02 nero | black
- /49 bronzo | bronze

/## FINITURA PREMIUM | PREMIUM FINISHING

- /81 oro rosa | rose gold
- /82 bronzo antico | antique bronze
- /83 ottone brunito spazzolato / brushed burnished brass

/## FINITURA PIASTRA DI CHIUSURA | COVER FINISHING

- /01 bianco | white
- /02 nero | black
- /12 grigio | grey
- /49 bronzo | bronze



IBRIDA SISTEMA | SISTEM

WALL-CEILING
SUSPENSION - FLOOR

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K



● FASCIO/BEAM

- S Spot
- F Flood
- Z Asymmetric

Per i gradi vedere in tabella -
For degree check the table

COMPOSIZIONE CODICE: xxx.x /##

HOW TO CREATE THE CODE: F1000.827S /01

CODE

F1000.8 ● ● — /## finishing
base code kelvin beam

700 DRIVERS VEDI | SEE P. 452