

2

DOWNLIGHT

LE COLLEZIONI


lucifero's
ARCHI-TECH LIGHTING

INDOOR - Incassi | Downlight

IRIDE INCASSO P. 41 **NEW**




BEST P.47 **NEW**

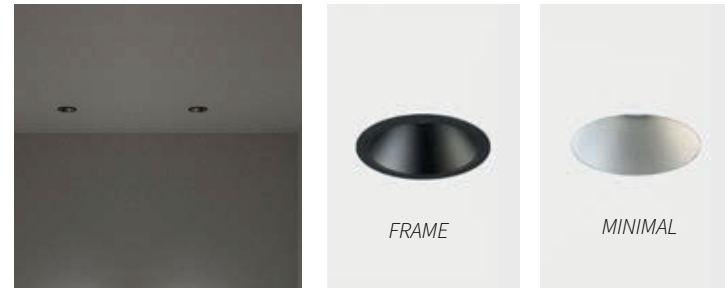


IKONE P.56 **NEW**



ISQUARE P.58 **NEW**

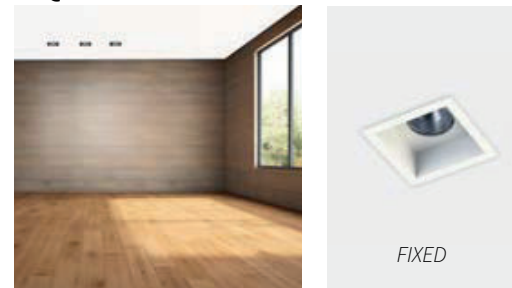


CONVEX P.60 **NEW**

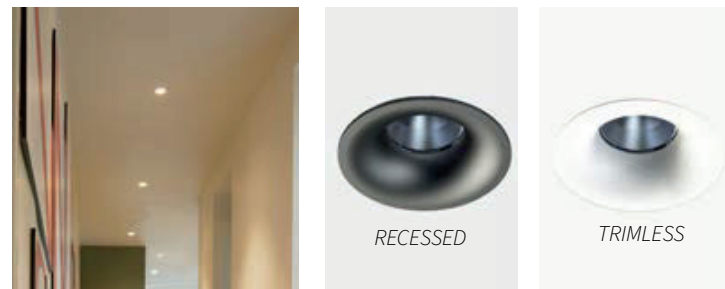


STICK P.62 **NEW**




SPOTTINO P.65 **NEW**

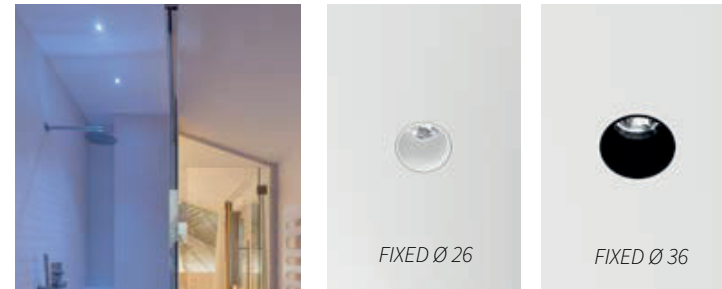

CI P.69

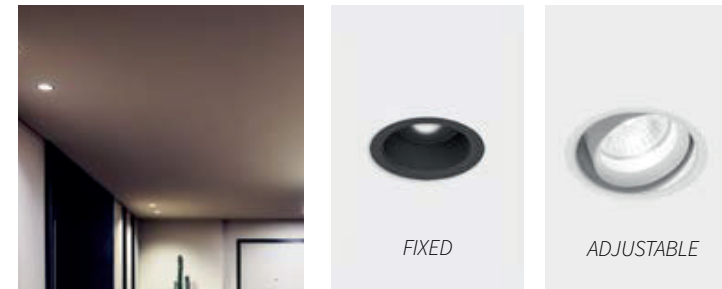

NYX P.75

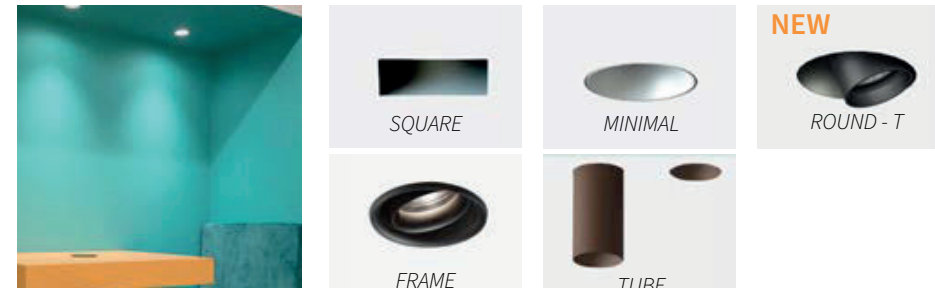

TWENTY 7 P.95



INDOOR - Incassi | Downlight

LEVA & LEVA QUADRA P.105



INCAS 45/90 P.149



MINI SIGHT P.121



MINIFRAME P.153



SIGHT P.131



STEP P.157



MINI INCAS P.137



WINDOW P.161



INCAS P.143



DOWNLIGHT

INDOOR - Incassi | Downlight




IRIDE INCASSO

IRIDE

INCASSO | RECESSED



FINITURE STANDARD / STANDARD FINISHINGS

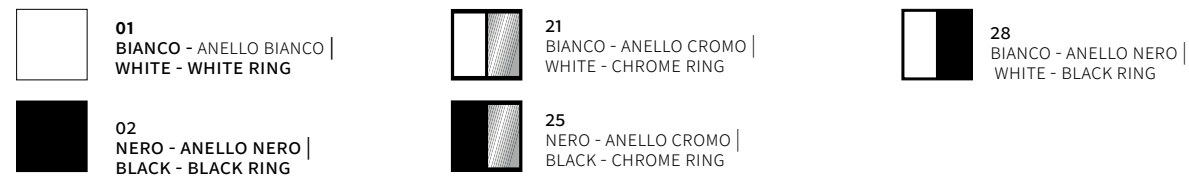

La collezione firmata Mario Cucinella si arricchisce della versione ad incasso. Iride è costituita da un corpo in pressofusione di alluminio verniciato e da un anello intercambiabile cromo, bianco o nero. Gruppi ottici completi di led ad alta resa cromatica (CRI>90), lente, housing antiabbagliamento e driver elettronico. Corpo ottico fisso o orientabile con possibilità di orientamento 0-90° rispetto all'asse orizzontale. Ottiche spot, flood e wide. Grado di protezione IP20.

The collection by Mario Cucinella has a new version: recessed. Iride consists of a body in painted die-cast aluminum and an interchangeable ring – in white, black or chrome finishing. Optical groups complete with high color rendering LEDs (CRI>90), lens, anti-glare housing and electronic driver. Fixed or adjustable optical body, with the 0-90° orientation on the horizontal axis. Spot, flood and wide optics. IP20.



MARCHIO DI PRODOTTO DEL REGNO UNITO CHE DEVE ESSERE UTILIZZATO PER I PRODOTTI IMMESSI SUL MERCATO IN GRAN BRETAGNA (INGHILTERRA, GALLES E SCOZIA) A DIMOSTRAZIONE DELLA CONFORMITÀ DEGLI STESSI ALLE NORMATIVE TECNICHE IN VIGORE IN UK. UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE







DIAMETRO DISPONIBILE 114 MM / AVAILABLE DIAMETER 114 MM






IDONEI PER CARTONGESSO | SUITABLE FOR PLASTERBOARD

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K


FASCIO / BEAM

S		SPOT
F		FLOOD
W		WIDE

FINITURE PREMIUM / PREMIUM FINISHINGS

/ 81		ORO ROSA ROSE GOLD
/ 82		BRONZO ANTICATO/ANTIQUE BRONZE
/ 83		OTTONE BRUNITO SPAZZOLATO/ BRUSHED BURNISHED BRASS

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

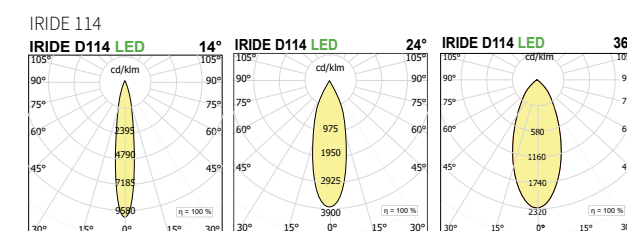

IRIDE INCASSO

CARTONGESSO | PLASTERBOARD



FINITURA PREMIUM | PREMIUM FINISHING



VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN**
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
- FASCIO / BEAM**
 - S Spot 14°
 - F Flood 24°
 - W Wide 36°

COMPOSIZIONE CODICE: xxx.x ●● / ##
HOW TO CREATE THE CODE: F1000.827S / 01


CODE
F1000.8 ● ● / ## — finishing
base code kelvin beam

/ ## FINITURA | FINISHING

- / 01 bianco - anello bianco | white - white ring
- / 02 nero - anello nero | black - black ring
- / 21 bianco - anello cromo | white - chrome ring
- / 25 nero - anello cromo | black - chrome ring
- / 28 bianco - anello nero | white - black ring

700 900 DRIVERS VEDI | SEE P.452


FISSO FRAME | FRAME FIXED



LED W	mA	Ø	lm product/beam 3000K S14° F24° W36°	CODE
26	700	114	2118 2531 2108	IR20.9 ●● / ##
34	900	114	2476 2942 2596	IR21.9 ●● / ##

700 900 IP20 CRI >90 LED 100% 5 UK CA CE
taglio per incasso / recessed hole dimension Ø 130



ORIENTABILE FRAME | FRAME ADJUSTABLE



LED W	mA	Ø	lm product/beam 3000K S14° F24° W36°	CODE
26	700	114	2118 2531 2108	IR22.9 ●● / ##
34	900	114	2476 2942 2596	IR23.9 ●● / ##

700 900 IP20 CRI >90 LED 100% 5 UK CA CE
taglio per incasso / recessed hole dimension Ø 130

FISSO MINIMAL | MINIMAL FIXED




LED W	mA	Ø	lm product/beam 3000K S14° F24° W36°	CODE
26	700	114	2118 2531 2108	IR24.9 ●● / ##
34	900	114	2476 2942 2596	IR25.9 ●● / ##

700 900 IP20 CRI >90 LED 100% 5 UK CA CE
taglio per incasso / recessed hole dimension Ø 130

ACCESSORIO OBBLIGATORIO CASSAFORMA IR24.CC / MANDATORY ACCESSORY WALLBOX IR24.CC

ORIENTABILE MINIMAL | MINIMAL ADJUSTABLE



LED W	mA	Ø	lm product/beam 3000K S14° F24° W36°	CODE
26	700	114/131	2118 2531 2108	IR26.9 ●● / ##
34	900	114/131	2476 2942 2596	IR27.9 ●● / ##

700 900 IP20 CRI >90 LED 100% 5 UK CA CE
taglio per incasso / recessed hole dimension Ø 143


ACCESSORIO OBBLIGATORIO CASSAFORMA IR26.CC / MANDATORY ACCESSORY WALLBOX IR26.CC

ACCESSORIO OBBLIGATORIO CASSAFORMA PER CARTONGESSO

ACCESSORY MANDATORY WALLBOX FOR PLASTERBOARD


5 UK CA CE

taglio per incasso / recessed hole dimension Ø 138



CODE
IR24.CC


TELAIO PER CARTONGESSO FRAME FOR PLASTERBOARD



13-20

taglio per incasso / recessed hole dimension Ø 140

CODE
LTN09A

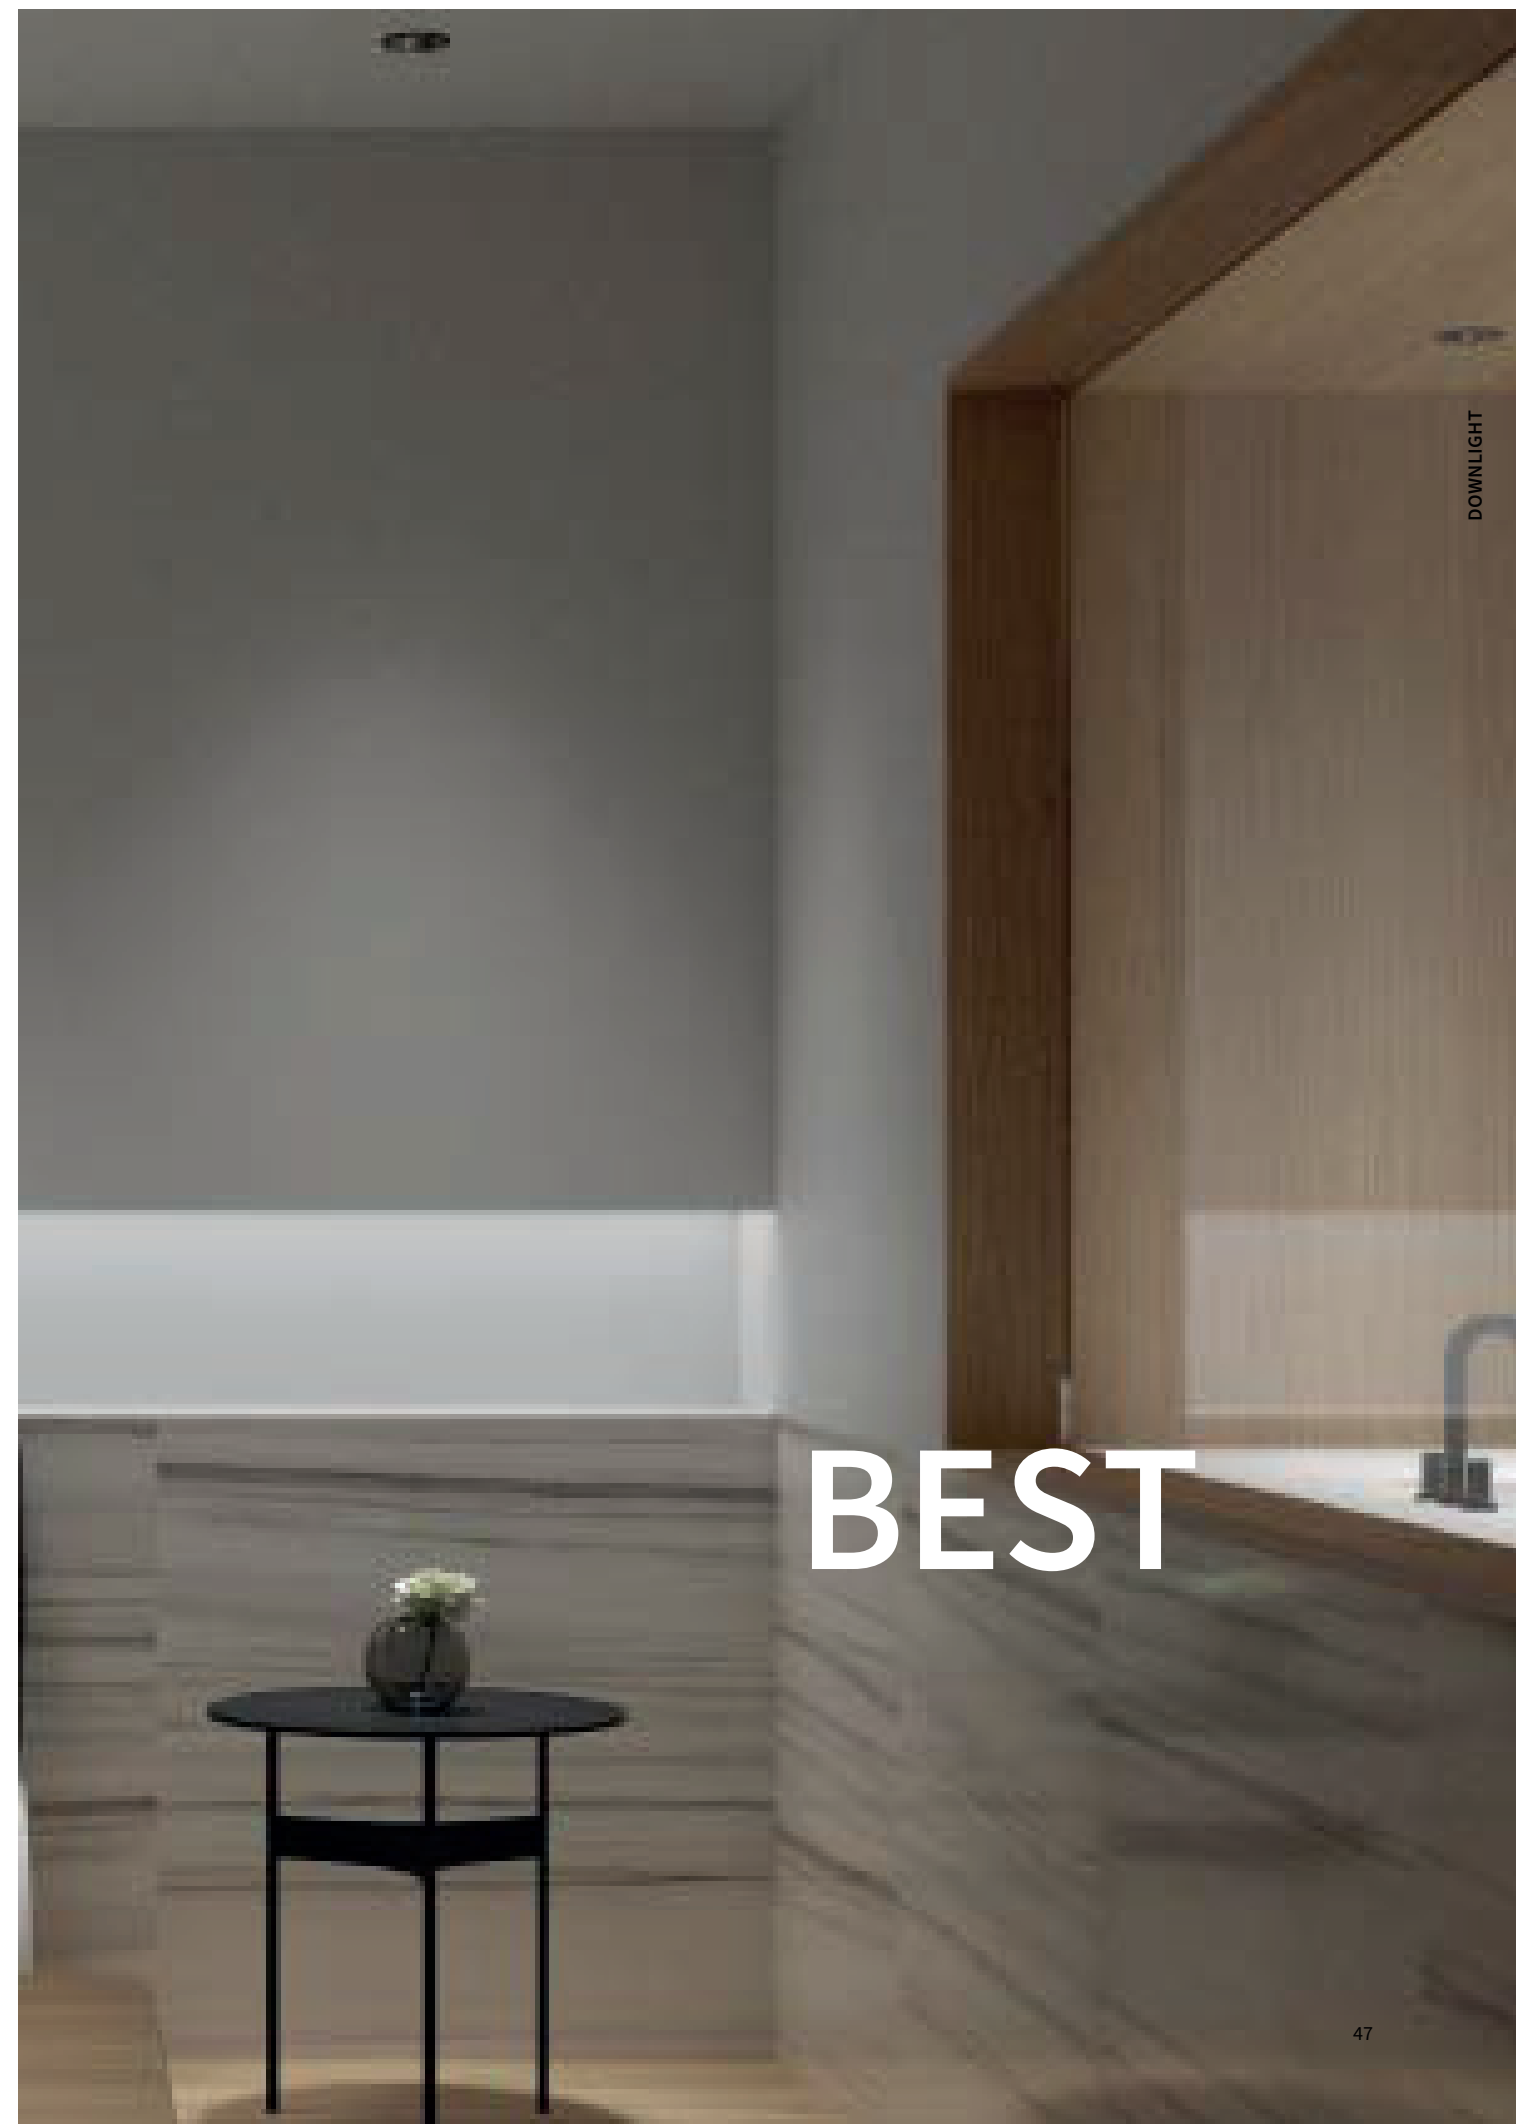

DOWNLIGHT

BEST



Apparecchi da incasso fisso o orientabile in pressofusione di alluminio verniciata, con sorgente LED integrata. Il modulo e' facilmente removibile senza l'utilizzo di attrezzi per agevolare il montaggio e l'eventuale manutenzione. Alimentatori disponibili come accessorio. Cornice di battuta disponibile bianca e nera. Grado di protezione IP20.

Recessed ceiling fixed and adjustable luminaires, made in die casted aluminum, painted by powder coating. Integrated LED source. The light engine can be removed without using any tool for an easy assemble and in case of maintenance. Power supplies available as accessories. The front trim is available in white and black. IP20.



MARCHIO DI PRODOTTO DEL REGNO UNITO CHE DEVE ESSERE UTILIZZATO PER I PRODOTTI IMMESSI SUL MERCATO IN GRAN BRETAGNA (INGHILTERRA, GALLES E SCOZIA) A DIMOSTRAZIONE DELLA CONFORMITÀ DEGLI STESSI ALLE NORMATIVE TECNICHE IN VIGORE IN UK. UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE



DIAMETRO PRODOTTO / PRODUCT DIAMETER 65 mm - 83 mm - 105 mm



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO / BEAM

S		SPOT
F		FLOOD
W		WIDE

FINITURE STANDARD / STANDARD FINISHINGS

/ 01		BIANCO / WHITE
/ 02		NERO / BLACK

BEST FRAME




VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K



- **FASCIO / BEAM**
- F Flood 24°
- W Wide 38°



- **PARABOLA / REFLECTOR**
- B Bianco / White
- N Nero / black
- L Lucido / Polished

FINITURA | FINISHING

- /01 bianco | white
- /02 nero | black

COMPOSIZIONE CODICE: xxx.x ●●● / ##

HOW TO CREATE THE CODE: F1000.827SX / 01

CODE
F1000.8 ●●● / ## finishing

base code | kelvin | beam | reflector | dimmable


PARABOLA U / U REFLECTOR




Wallwasher lucido / polished wallwasher

150 300 500 DRIVERS VEDI | SEE P.452


55 FISSO | FIXED




ORIENTABILE | ADJUSTABLE




75 FISSO | FIXED




ORIENTABILE | ADJUSTABLE



95 FISSO | FIXED



ORIENTABILE | ADJUSTABLE



taglio per incasso / recessed hole dimension ∅ 55

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED 150 IP20 CRI >90 A 5 UK CE

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
5	120	65	76	0,49	650	650	BT550.9 ●●● / ##

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
5	120	65	76	0,49	650	650	BT550.9 ●●● U / ##

taglio per incasso / recessed hole dimension ∅ 75

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED 300 IP20 CRI >90 A 5 UK CE

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
12	300	83	100	0,49	1560	1560	BT750.9 ●●● / ##

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
12	300	83	100	0,49	1560	1560	BT750.9 ●●● U / ##

taglio per incasso / recessed hole dimension ∅ 95

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED 500 IP20 CRI >90 A 5 UK CE

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
20	500	105	134	0,49	2600	2600	BT950.9 ●●● / ##

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
20	500	105	134	0,49	2600	2600	BT950.9 ●●● U / ##

LED W	mA	∅	H	Kg	lm product/beam 3000K		CODE
					F24°	W38°	
20	500	105	134	0,49	2600	2600	BT951.9 ●●● / ##

BEST

MINIMAL



VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN**
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
- FASCIO / BEAM**
 - F Flood 24°
 - W Wide 38°

- PARABOLA / REFLECTOR**
 - B Bianco / White
 - N Nero / black
 - L Lucido / Polished

COMPOSIZIONE CODICE: xxx.x●●●/##

HOW TO CREATE THE CODE: **F1000.827SX / 01**

F1000.8 | ● | ● | ● | /## finishing

base code | kelvin | beam | reflector


PARABOLA U / U REFLECTOR

- Wallwasher lucido / polished wallwasher


150 300 500 DRIVERS VEDI | SEE P.452

MINIMAL 55

FISSO | FIXED




ORIENTABILE | ADJUSTABLE




MINIMAL 75

FISSO | FIXED




ORIENTABILE | ADJUSTABLE




MINIMAL 95

FISSO | FIXED



ORIENTABILE | ADJUSTABLE



taglio per incasso / recessed hole dimension \varnothing 55

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED




LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
5	120	65	76	0,49	650 650	BT552.9 ●●●

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
5	120	65	76	0,49	650 650	BT552.9 ●●● U

taglio per incasso / recessed hole dimension \varnothing 75

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED



LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
12	300	83	100	0,49	1560 1560	BT752.9 ●●●

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
12	300	83	100	0,49	1560 1560	BT752.9 ●●● U

taglio per incasso / recessed hole dimension \varnothing 95

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED



LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
20	500	105	134	0,49	2600 2600	BT952.9 ●●●

WALLWASHER

LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
20	500	105	134	0,49	2600 2600	BT952.9 ●●● U

LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
20	500	105	134	0,49	2600 2600	BT952.9 ●●●

LED W	mA	∅	H	Kg	lm product/beam 3000K F24° W38°	CODE
20	500	105	134	0,49	2600 2600	BT952.9 ●●● U

I-KONE

FRAME RECESSED





FISSO | FIXED



INCLINABILE | ADJUSTABLE



FISSO | FIXED

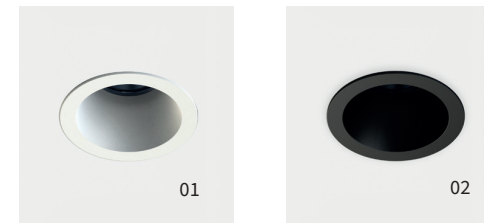

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED DISPONIBILI ANCHE VERSIONI 2700 / 4000K E FINITURA NERA / 02 | AVAILABLE VERSION 2700 / 4000K AND BLACK / 02 | FINISHING

taglio per incasso / recessed hole dimension \varnothing 80
spazio per passaggio alimentatore / necessary space to insert driver \varnothing 80

IP20 IP23 CRI >90 5 UKCA CE

LED		Im product / beam 3000K		CODE	
W	mA	\varnothing	H	F27°	W46°
8	250	88	111	860	860
12	350	88	111	1285	1285

250 350 IK006.9 ●● / ##

LED		Im product / beam 3000K		CODE	
W	mA	\varnothing	H	F27°	W46°
12	350	88	131	1285	1289
18	500	88	131	1575	1579



350 500 IK007.9 ●●● / ##

230V AC IP20 IP23 CRI >90 5 UKCA CE

GU10		CODE	
W	\varnothing .mm	H.mm	Kg
50	88	94	0.21

IK008 / ##

INCLINABILE | ADJUSTABLE

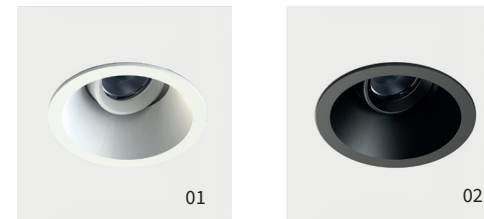

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED DISPONIBILI ANCHE VERSIONI 2700 / 4000K E FINITURA NERA / 02 | AVAILABLE VERSION 2700 / 4000K AND BLACK / 02 | FINISHING

taglio per incasso / recessed hole dimension \varnothing 90
spazio per passaggio alimentatore / necessary space to insert driver \varnothing 90

IP20 IP23 CRI >90 5 UKCA CE

LED		Im product / beam 3000K		CODE	
W	mA	\varnothing	H	F27°	W46°
8	250	103	111	860	860
12	350	103	111	1285	1285

250 350 IK010.9 ●●● / ##

LED		Im product / beam 3000K		CODE	
W	mA	\varnothing	H	F27°	W46°
12	350	103	131	1285	1285
18	500	103	131	1575	1579

350 500 IK011.9 ●●●● / ##

230V AC IP20 IP23 CRI >90 5 UKCA CE

GU10		CODE	
W	\varnothing .mm	H.mm	Kg
50	103	94	0.21

IK012 / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- FASCIO / BEAM
- F Flood 27°
- W Wide 46°
- ## FINITURA | FINISHING
- / 01 bianco | white
- / 02 nero | black

COMPOSIZIONE CODICE: xxx.x ●● / ##

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ●● / ## — finishing
base code kelvin beam

250 350 500 DRIVERS VEDI | SEE P.452 55

I-KONE

MINIMAL RECESSED




FISSO | FIXED



INCLINABILE | ADJUSTABLE




FISSO | FIXED

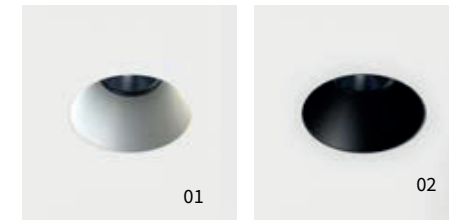

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED

taglio per incasso / recessed hole dimension \varnothing 77
spazio per passaggio alimentatore / necessary space to insert driver \varnothing 46



LED		W	mA	\varnothing	H	α	Kg	lm product / beam 3000K	CODE
								F27° W46°	
8	250	86	106	20	0,35	860	860	IK000.9	●● / ##
12	350	86	106	20	0,35	1285	1285		

LED		W	mA	\varnothing	H	α	Kg	lm product / beam 3000K	CODE
								F27° W46°	
12	350	86	126	20	0,35	1285	1285	IK001.9	●● / ##
18	500	86	126	20	0,35	1575	1579		

GU10


W	\varnothing .mm	Hmm	Kg	CODE
50	86	99	0.21	IK002

INCLINABILE | ADJUSTABLE



NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED

taglio per incasso / recessed hole dimension \varnothing 70
spazio per passaggio alimentatore / necessary space to insert driver \varnothing 46



LED		W	mA	\varnothing	L	α	Kg	lm product / beam 3000K	CODE
								F27° W46°	
8	250	84	98	30	0,35	860	860	IK003.9	●● / ##
12	350	84	98	30	0,35	1285	1285		

LED		W	mA	\varnothing	H	α	Kg	lm product / beam 3000K	CODE
								F27° W46°	
12	350	84	118	30	0,35	1285	1285	IK004.9	●● / ##
18	500	84	118	30	0,35	1575	1579		

GU10

W	\varnothing .mm	Hmm	Kg	CODE
50	84	94	0.21	IK005 / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
- **FASCIO / BEAM**
 - F** Flood 27°
 - W** Wide 46°
- / ## **FINITURA** | FINISHING
 - / 01 bianco | white
 - / 02 nero | black

COMPOSIZIONE CODICE: xxx.x ●● / ##

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ●● / ## — finishing
 | | |
 base code kelvin beam

250 350 500 DRIVERS VEDI | SEE P.452 57

I-SQUARE RECESSED




FISSO | FIXED



INCLINABILE | ADJUSTABLE




FISSO | FIXED

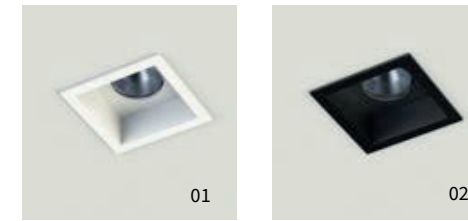


NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED DISPONIBILI ANCHE VERSIONI 2700 / 4000K E FINITURA NERA / 02 | AVAILABLE VERSION 2700 / 4000K AND BLACK / 02 | FINISHING

taglio per incasso / recessed hole dimension 77X77




LED		Im product/beam 3000K		CODE			
W	mA	LxW	H	F27°	W46°		
8	250	84.5X84.5	95	0,35	860	860	IS013.9 ●● / ##
12	350	84.5X84.5	95	0,35	1285	1285	



LED		Im product/beam 3000K		CODE			
W	mA	mm	H	F27°	W46°		
12	350	84.5X84.5	115	0,35	1285	1285	IS014.9 ●● / ##
18	500	84.5X84.5	115	0,35	1575	1575	


GU10		CODE		
W	LxW	Hmm	Kg	
50	84.5X84.5	94	0.21	IS015

INCLINABILE | ADJUSTABLE

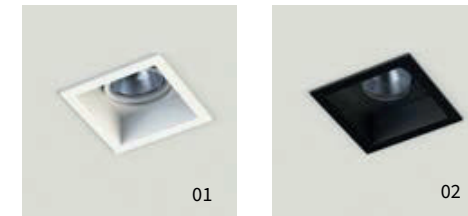


NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED DISPONIBILI ANCHE VERSIONI 2700 / 4000K E FINITURA NERA / 02 | AVAILABLE VERSION 2700 / 4000K AND BLACK / 02 | FINISHING

taglio per incasso / recessed hole dimension 77X77



LED		Im product/beam 3000K		CODE				
W	mA	mm	H	α	Kg			
8	250	84.5X84.5	95	30	0,35	860	860	IS016.9 ●● / ##
12	350	84.5X84.5	95	30	0,35	1285	1285	



LED		Im product/beam 3000K		CODE				
W	mA	mm	H	α	Kg			
12	350	84.5X84.5	115	30	0,35	1285	1285	IS017.9 ●● / ##
18	500	84.5X84.5	115	30	0,35	1575	1575	

GU10		CODE		
W	mm	Hmm	Kg	
50	84.5X84.5	94	0.21	IS017

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN
- FASCIO / BEAM
- / ## FINITURA | FINISHING
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- F Flood 27°
- W Wide 46°
- / 01 bianco | white
- / 02 nero | black

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: F1000.827S / 01


CODE
F1000.8 | ●● | ## | — finishing
base code kelvin beam

250 350 500 DRIVERS VEDI | SEE P.452 59


CONVEX



FISSO | FIXED

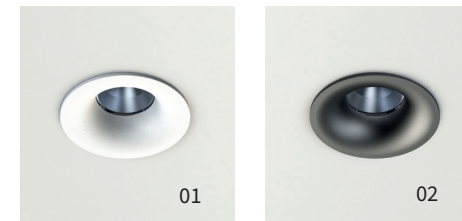

taglio per incasso / recessed hole dimension \varnothing 75
 spazio per passaggio alimentatore / necessary space to insert driver \varnothing 75



LED						Im product / beam 3000K		CODE	
W	mA	\varnothing	H	Kg	F 27°	W 46°			
8	250	84	90	0,35	860	860			CV018.9 ●● / ##
12	350	84	90	0,35	1285	1285			

LED						Im product / beam 3000K		CODE	
W	mA	\varnothing	H	Kg	F 27°	W 46°			
12	350	84	110	0,35	1285	1285			CV019.9 ●● / ##
18	500	84	110	0,35	1575	1575			

GU10								CODE	
W	\varnothing mm	H mm	Kg						
50	84	110	0,21						CV020

NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED



ACCESSORIO PER TRASFORMARE CONVEX IN VERSIONE TRIMLESS ACCESSORY TO TRANSFORM CONVEX IN TRIMLESS RECESSED



\varnothing ESTERNO / EXTERNAL 100 mm

CODE
CV030



VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN	● FASCIO / BEAM	/ ## FINITURA FINISHING
27 2700K	F Flood 27°	□ / 01 bianco white
30 3000K	W Wide 46°	■ / 02 nero black
35 3500K		
40 4000K		



COMPOSIZIONE CODICE: xxx.x ●● / ##
 HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ●● / ## finishing
 base code kelvin beam

250 350 500 DRIVERS VEDI | SEE P.452

STICK

FISSO CON PIATTELLO | FIXED RECESSED WITH PLATE

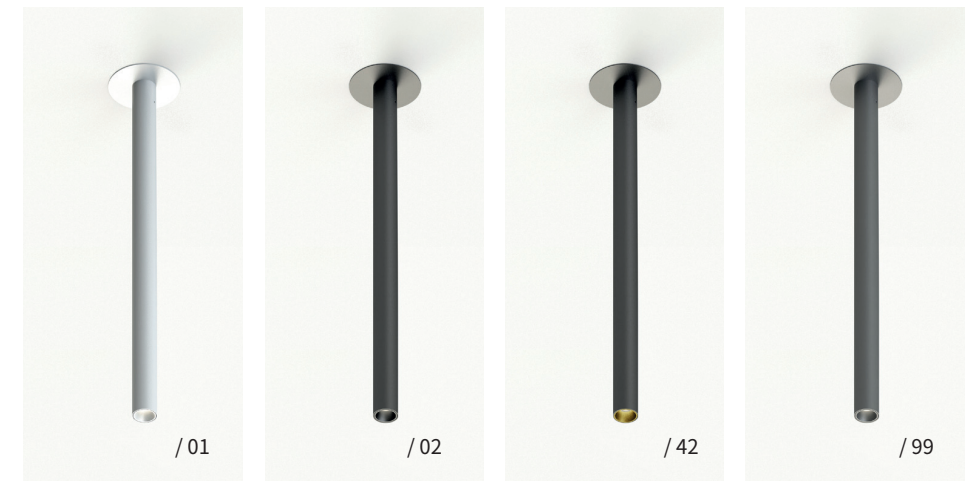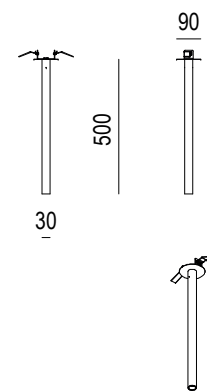


taglio per incasso / recessed hole dimension \varnothing 75

LED				lm product / beam 3000K		
W	mA	\varnothing	H	S28°	F40°	CODE
8	700	30	500	695	720	SK000.9 ●● / ##

DOWNLIGHT

ORIENTABILE | ADJUSTABLE

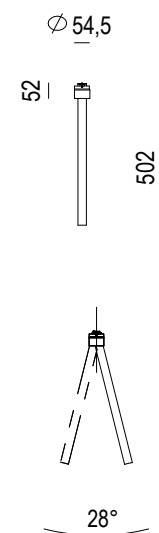

LED				lm product / beam 3000K		
W	mA	\varnothing	H	S28°	F40°	CODE
8	700	30	500	695	720	SK010.9 ●● / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

● FASCIO / BEAM

- **S** Spot
- **F** Flood

Per i gradi vedere in tabella -
For degrees check the table



/ ## FINITURA | FINISHING

- / 01 bianco / white
- / 02 nero / black
- / 42 nero e oro / black & gold
- / 99 grafite / graphite

PREMIUM FINISHING AVAILABLE

COMPOSIZIONE CODICE: xxx.x ●● / ##
HOW TO CREATE THE CODE: **F1000.827S / 01**

CODE
F1000.8 | ●● | / ## finishing
base code | kelvin | beam

700 DRIVERS VEDI | SEE P.452



SPOTTINO




SPOTTINO


Apparecchio da incasso per cartongesso, rasato a scomparsa totale per un'illuminazione d'accento. Caratterizzato da un aspetto minimale ma di grande impatto visivo, con dimensioni estremamente ridotte. Sorgente luminosa in posizione arretrata antiabbagliamento. L'alimentazione è da posizionare remota. Il grado di protezione è IP40/43

Built-in plasterboard luminaire, fully concealed, for accent lighting. Characterized by a minimal appearance but of great visual impact, with extremely small dimensions. Light source in back anti-glare position. The power supply is to be positioned remotely. The degree of protection is IP40/43.

SPOTTINO 26




CARTONGESSO/PLASTERBOARD

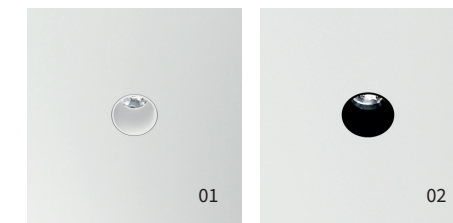


LED W	mA	ø	H	lm product / beam 3000K	CODE
5,7	500	26	105	F27° 571	SO026.9 ● F /##

● disponibile solo fascio F available only F beam

SPOTTINO 36



CARTONGESSO/PLASTERBOARD

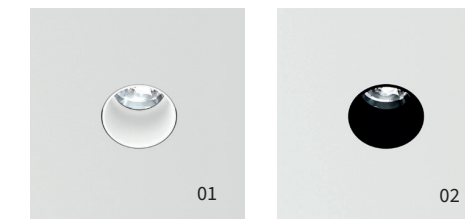

LED W	mA	ø	H	lm product / beam 3000K	CODE
8	700	36	93	S19° F28° 665 695	SO036.9 ●● /##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

● **FASCIO / BEAM**

- S Spot
- F Flood

Per i gradi vedere in tabella - For degrees check the table

/## **FINITURA** | FINISHING

- /01 bianco | white
- /02 nero | black

/## **FINITURE PREMIUM** / PREMIUM FINISHING


- /81 oro rosa/rose gold
- /82 bronzo anticato /antique bronze
- /83 ottone brunito spazzolato/ brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● /##

HOW TO CREATE THE CODE: **F1000.827S / 01**






CODE
F1000.8 | ● | ● | /## — finishing
 base code kelvin beam

500 700 DRIVERS VEDI | SEE P.452

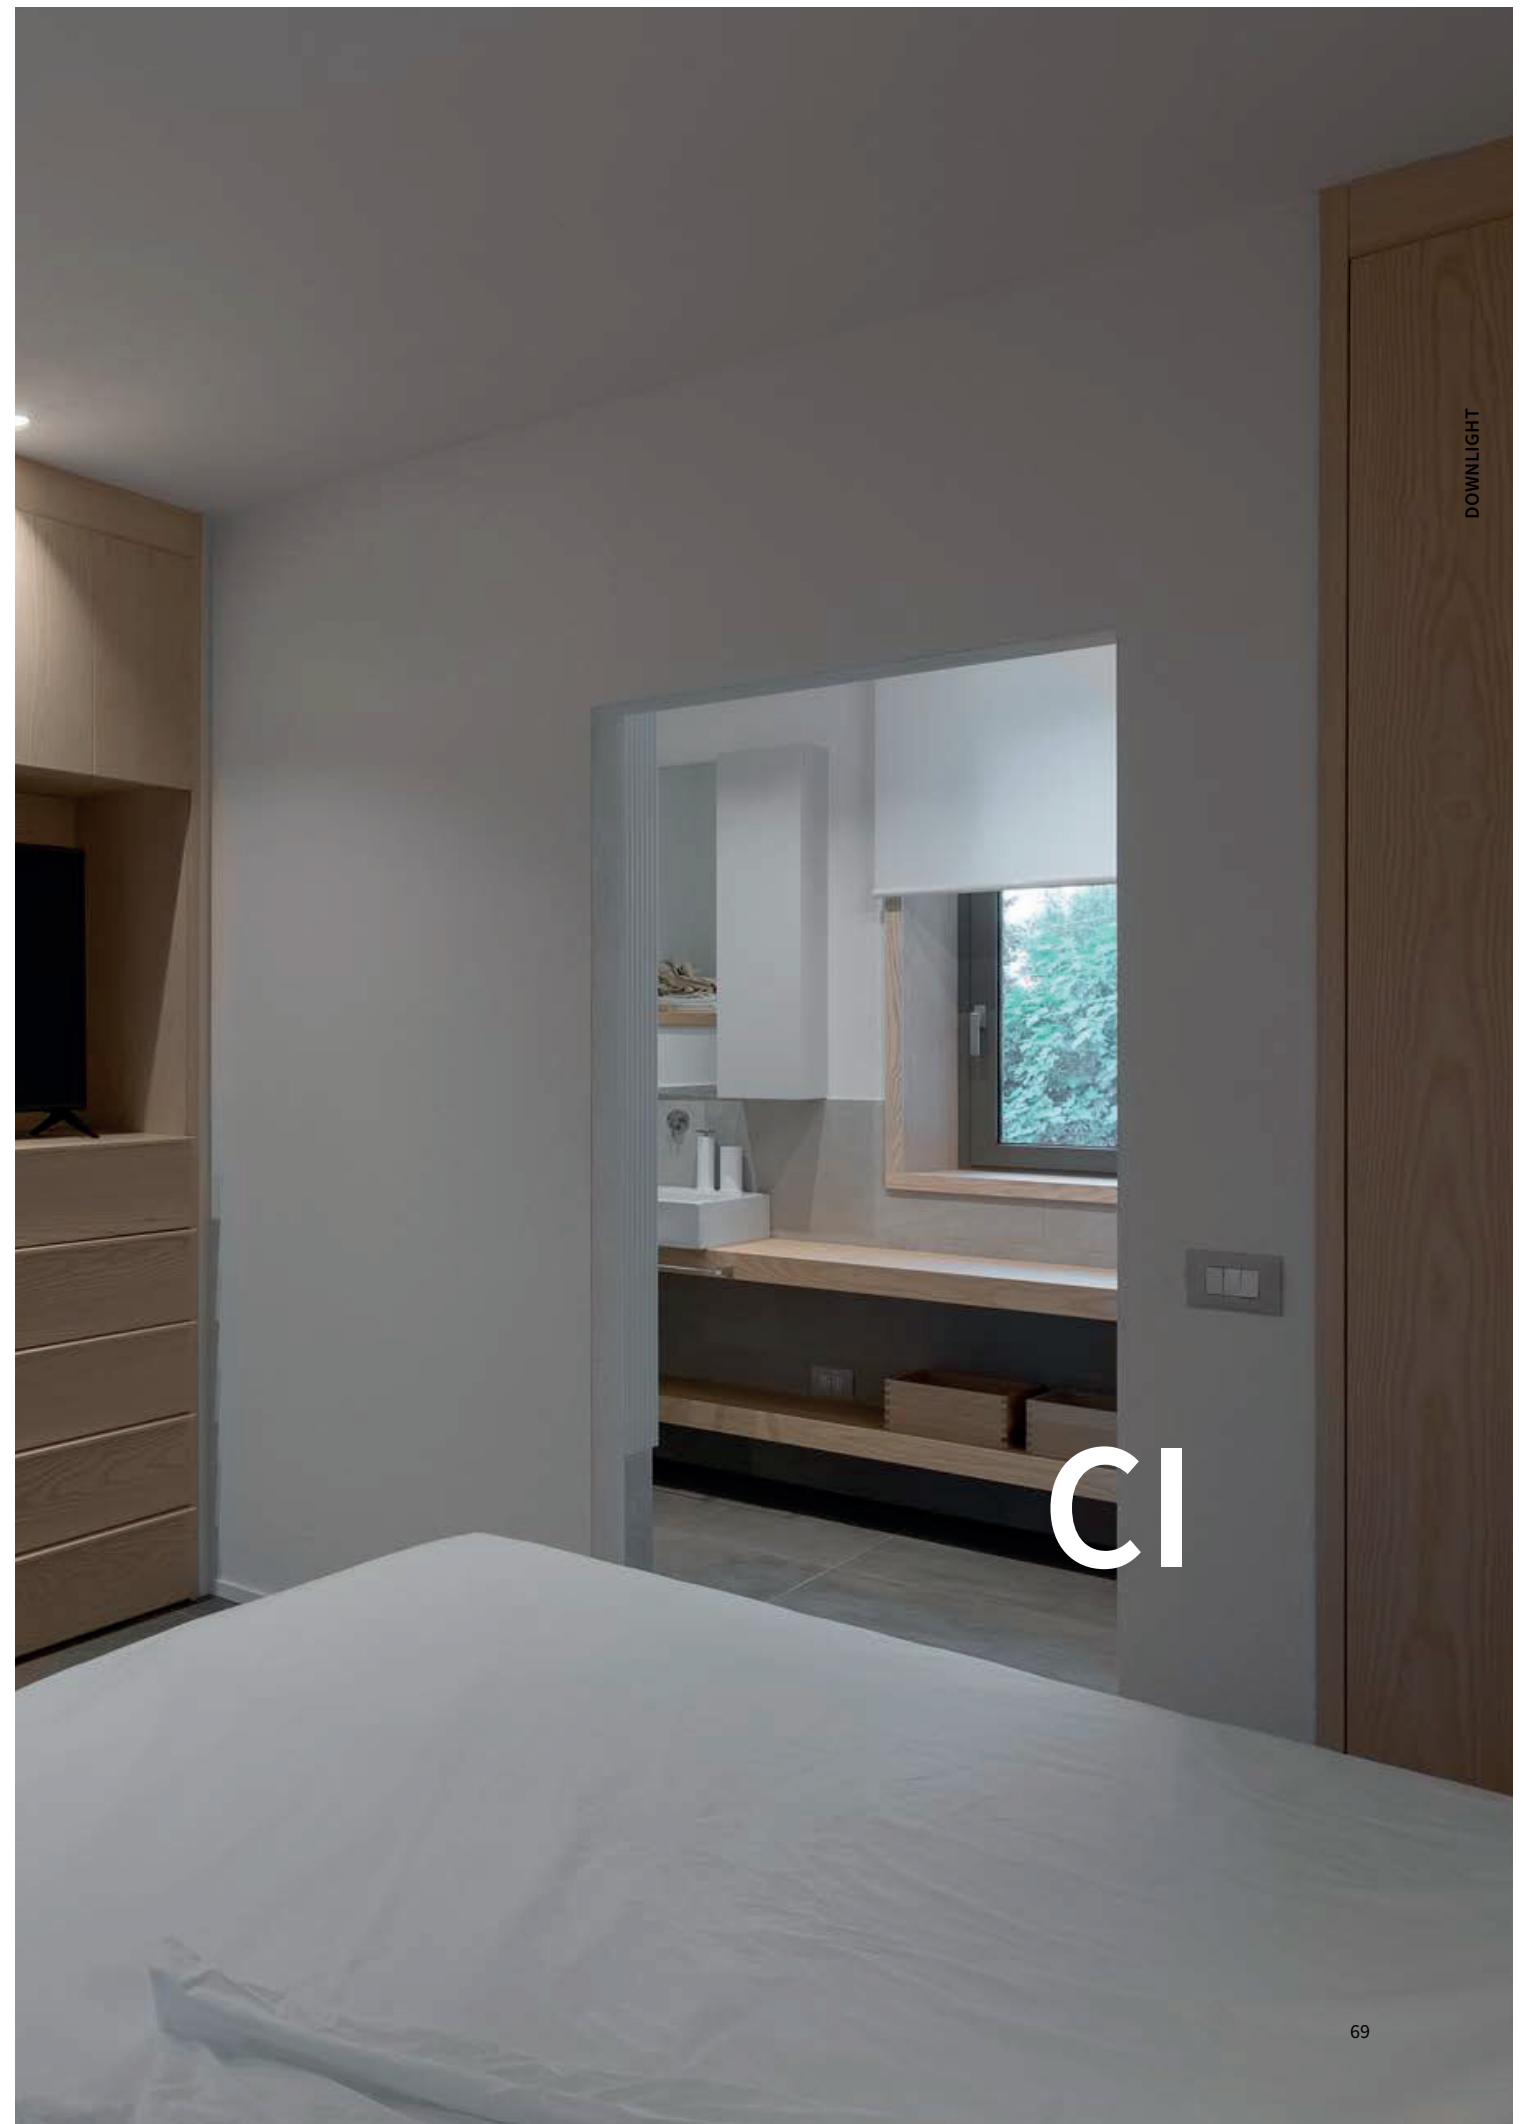

CI

CI

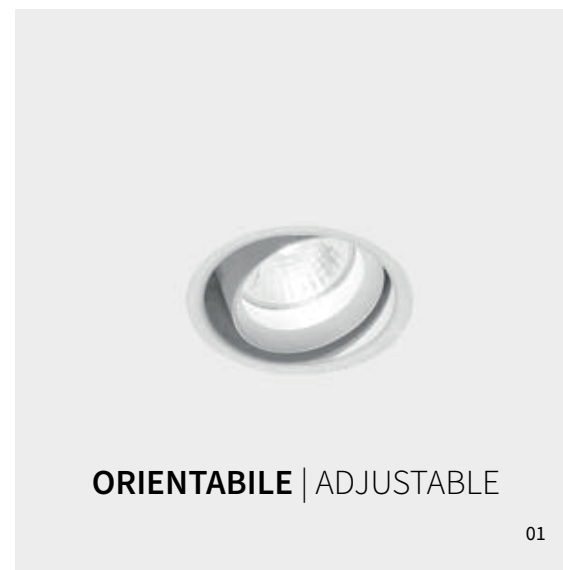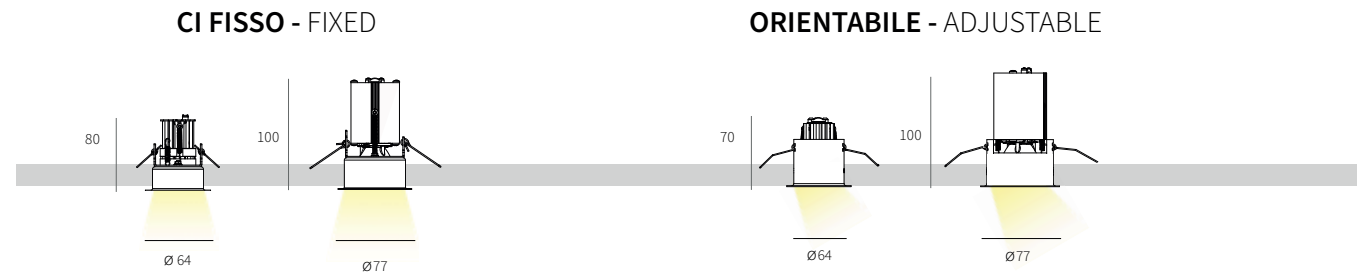

MARCHIO DI PRODOTTO DEL REGNO UNITO CHE DEVE ESSERE UTILIZZATO PER I PRODOTTI IMMESSI SUL MERCATO IN GRAN BRETAGNA (INGHILTERRA, GALLES E SCOZIA) A DIMOSTRAZIONE DELLA CONFORMITÀ DEGLI STESSI ALLE NORMATIVE TECNICHE IN VIGORE IN UK. UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE



DIAMETRO PRODOTTO / PRODUCT DIAMETER 64 mm / DIAM. 77 mm



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.

KELVIN	FASCIO / BEAM
27	F FLOOD
30	W WIDE
35	
40	


FASCIO / BEAM	FINITURE STANDARD / STANDARD FINISHINGS
F FLOOD	/ 01 BIANCO / WHITE
W WIDE	/ 02 NERO / BLACK
	/ 03 CROMO / CHROME

FINITURE PREMIUM / PREMIUM FINISHINGS
/ 81 ORO ROSA / ROSE GOLD
/ 82 BRONZO ANTICATO / ANTIQUE BRONZE
/ 83 OTTONE BRUNITO SPAZZOLATO / BRUSHED BURNISHED BRASS

Apparecchi da incasso a soffitto, fissi od orientabili, con sorgente LED integrata o per lampade GU10 230 / 240V. Alimentatori, da posizionarsi in remoto, disponibili come accessorio. Corpo, cornice di battuta e gruppo ottico in metallo verniciato o cromato. Installabile anche in soffitti in calcestruzzo o laterizio mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20.


Recessed ceiling luminaires, fixed or adjustable, with integrated LED source or for GU10 230 / 240V light bulbs. Power supplies, to be positioned remotely, available as accessories. Body, trimmed frame and optical group in painted metal or chromed. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20.

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

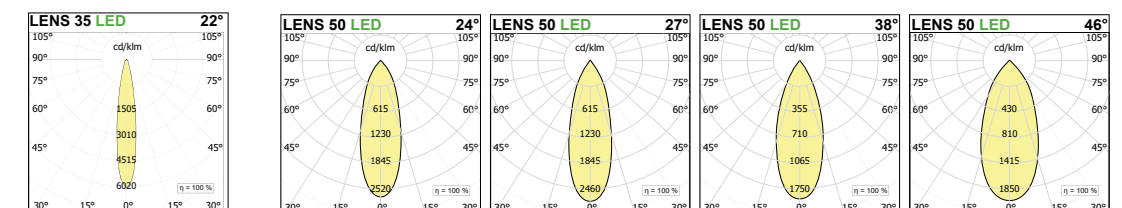



CI INCASSO | RECESSED

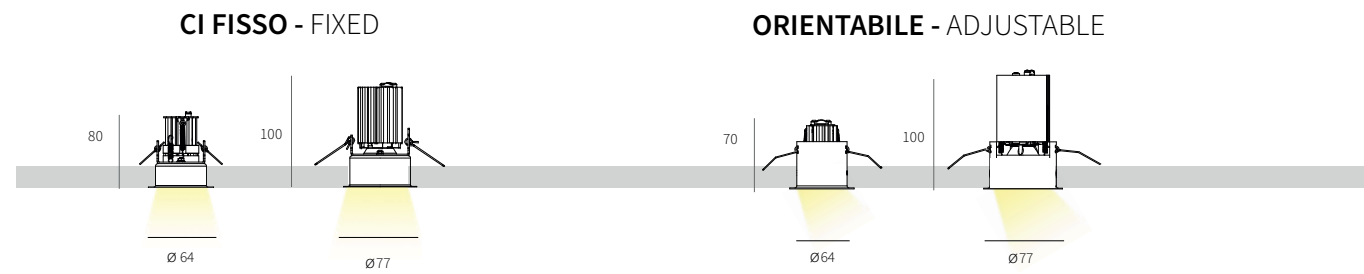

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

- **FASCIO / BEAM**
- S Spot
- F Flood
- W Wide

Per i gradi vedere in tabella -
For degrees check the table

/ ## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 03 cromo | chrome (solo orientabile/only adjustable)

/ ## FINITURA PREMIUM / PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo antico | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x●●/##
HOW TO CREATE THE CODE: **F1000.827S / 01**


CODE
F1000.8 ● ● / ## — finishing
base code kelvin beam

350 500

CI FISSO - FIXED




CI 35




Per cartongesso o laterizio -
Suitable for plasterboard and
brickwall.

CI 50



Per cartongesso o laterizio -
Suitable for plasterboard
and brickwall.



Per cartongesso o laterizio -
Suitable for plasterboard and
brickwall.

taglio per incasso / recessed hole dimension \varnothing 56

LED						CODE
W	mA	\varnothing mm	Hmm	lm prod 3000k / beam F22°		
5	500	64	80	520		LT1167.9 ● F / ##

● Disponibile solo fascio F | Available only F beam

Accessori - accessories: LT9061: cassaforma CI35 / 35F - wallbox CI35 e CI35 / 35F

taglio per incasso / recessed hole dimension \varnothing 70

LED							CODE
W	mA	\varnothing mm	Hmm	lm product/beam 3000K	F27°	W46°	
8	250	79	89	860	860	860	LT1183.9 ● ● / ##
12	350	79	89	1285	1285	1285	

LED							CODE
W	mA	\varnothing mm	Hmm	F27°	W46°		
12	350	79	108	1285	1289		LT1166.9 ● ● / ##
18	500	79	108	1575	1579		

GU10LED


W			\varnothing mm	Hmm	CODE
1 x max 50			77	75	LT1165 / ##

Accessori - Accessories: LT9062.1: cassaforma CI50 / 50F - wallbox CI50 e CI50 / 50F

CI ORIENTABILE - ADJUSTABLE




CI 35



Solo per cartongesso -
Suitable only for plasterboard.

CI 50



Solo per cartongesso -
Suitable only for plasterboard.

taglio per incasso / recessed hole dimension \varnothing 56

LED						CODE
W	mA	\varnothing	Hmm	lm prod 3000K beam F22°		
5	500	64	70	520		LT1163.9 ● F / ##

● Disponibile solo fascio F | Available only F beam

taglio per incasso / recessed hole dimension \varnothing 70

LED							CODE		
W	mA	\varnothing	Hmm	α	lm product/beam 3000K	S15°	F27°	W46°	
8	250	77	100	30	860	860	860	860	LT1170.9 ● ● / ##
12	350	77	100	30	1285	1285	1285	1285	



LED							CODE	
W	mA	\varnothing	Hmm	α	S15°	F27°	W46°	
12	350	77	120	30	1285	1285	1289	LT1168.9 ● ● / ##
18	500	77	120	30	1575	1575	1579	

GU10LED

W			\varnothing mm	Hmm	CODE
1 x max 50			77	90	LT1161 / ##

Accessori - Accessories: LT9062.1: cassaforma CI50 / 50F - wallbox CI50 e CI50 / 50F

CASSAFORMA PER INSTALLAZIONE A LATERIZIO E CALCESTRUZZO | WALLBOX FOR INSTALLING IN BRICK WALL AND CONCRETE



CI35	Dim.LxWmm	Hmm	CODE
	190 x 114	80	LT9061
CI50	208 x 140	120	LT9062.1

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete




NYX

NYX

Q
QUADRATO E RASATO
SQUARE AND TRIMLESS




TF
TONDO, FISSO E RASATO
ROUND, FIXED AND TRIMLESS

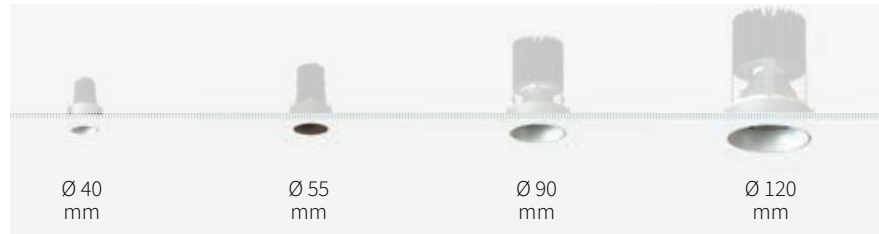


TD
TONDO, ORIENTABILE E RASATO
ROUND, ADJUSTABLE AND TRIMLESS




FRAME TF
TONDO, FISSO CON CORNICE
ROUND, FIXED WITH FRAME

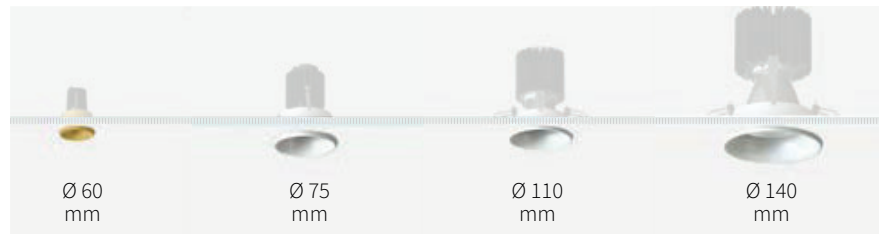

FRAME TD
TONDO, ORIENTABILE CON CORNICE
ROUND, ADJUSTABLE WITH FRAME

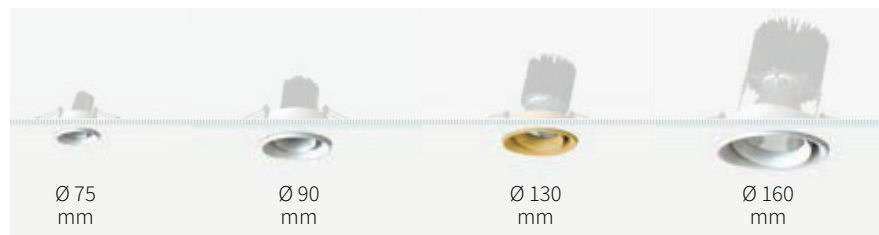

TUBE
TONDO, RASATO, REGOLABILE
ROUND, TRIMLESS AND ADJUSTABLE

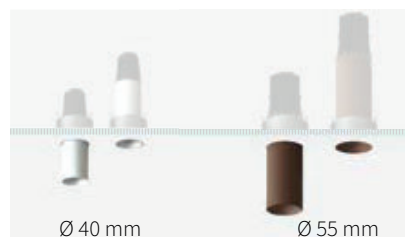

Apparecchi da incasso a soffitto trimless o con battuta, fissi ed orientabili, per illuminazione d'accento o diffusa. Sorgente luminosa in posizione arretrata anti abbagliamento. Disponibile nelle versioni per installazione in cartongesso o in laterizio e calcestruzzo mediante l'utilizzo di apposite controcasse ordinabili come accessorio. Disponibili con sorgente LED integrata o per lampade GU10 230 / 240V. Corpo e gruppo ottico in alluminio verniciato. Alimentatore remoto disponibile come accessorio. Grado di protezione IP54

Trimless or trimmed recessed ceiling luminaires, fixed and adjustable, for accent or diffused lighting. Light source in anti-glare recessed position. Available for plasterboard installation or brick and concrete through the use of special outercases to be ordered separately. Powered with integrated LED source or for GU10 230 / 240V light bulbs. Body and optical group in painted aluminum. Remote power supply available as an accessory. IP54



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED ORIENTABILE / ADJUSTABLE




DIAMETRI DISPONIBILI DA 40 A 160 MM A SECONDA DEI MODELLI / AVAILABLE DIAMETERS FROM 40 TO 160 MM IT DEPENDS ON THE MODEL



IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.

KELVIN	FASCIO / BEAM	FINITURE STANDARD / STANDARD FINISHINGS	FINITURE PREMIUM / PREMIUM FINISHINGS
27 2700°K	S SPOT	/ 01 BIANCO / WHITE	/ 81 ORO ROSA / ROSE GOLD
30 3000°K	F FLOOD	/ 02 NERO / BLACK	/ 82 BRONZO ANTICATO / ANTIQUE BRONZE
35 3500°K	W WIDE	/ 36 ORO / GOLD	/ 83 OTTONE BRUNITO SPAZZOLATO / BRUSHED BURNISHED BRASS
40 4000°K		/ 49 BRONZO / BRONZE	

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

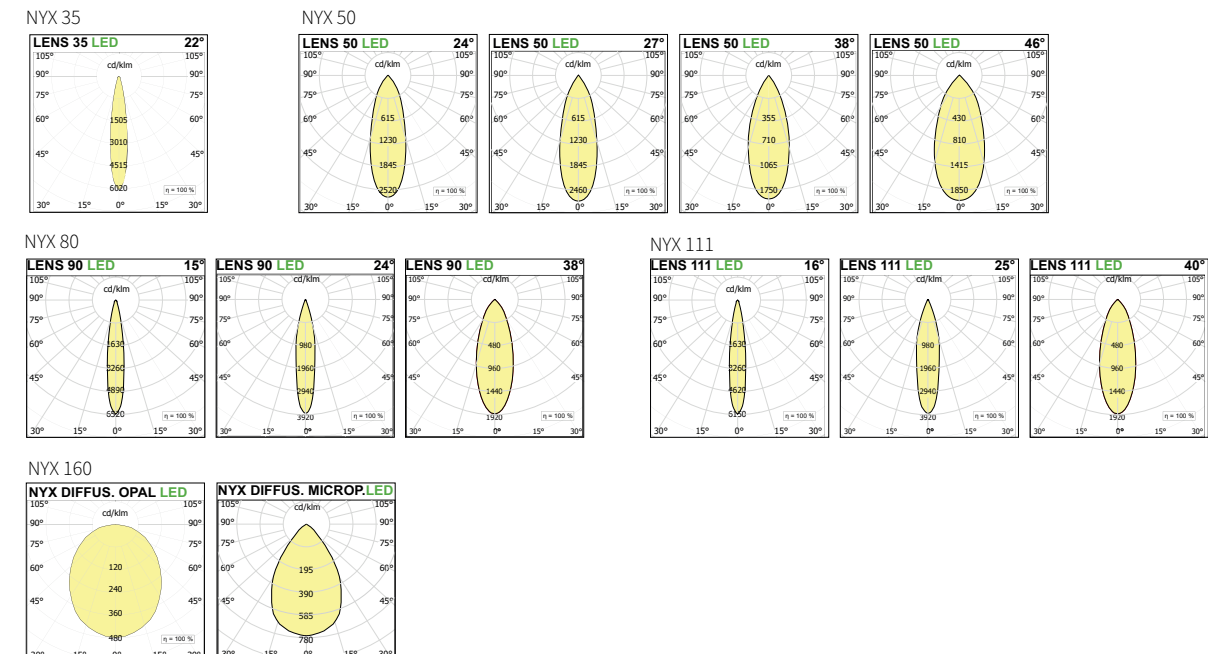


NYX

QUADRATO TRIMLESS


SQUARE TRIMLESS

DOWNLIGHT

VERSIONI / VERSIONS

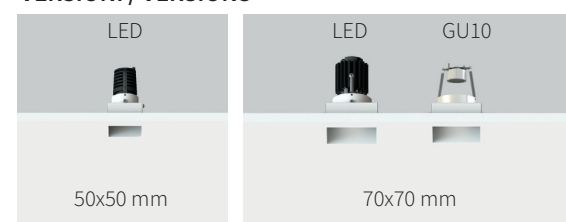


FINITURE / FINISHINGS

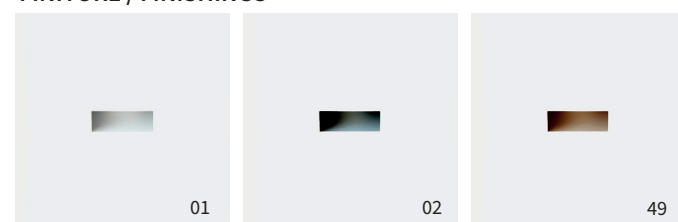

NYX Q35

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION Ø 40

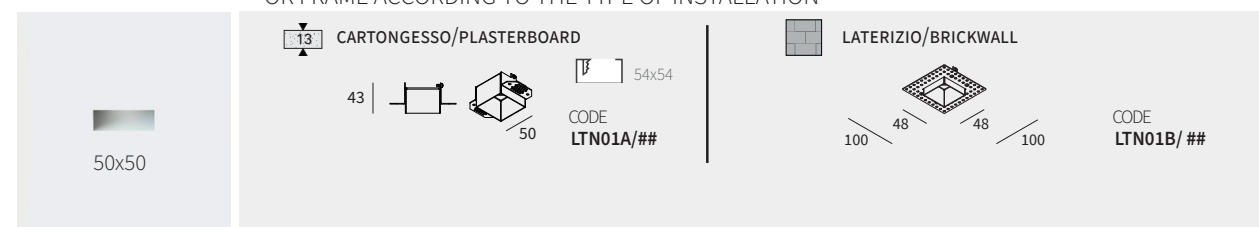


2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED		355°		30°		Ø40	
W	mA	ømm	Hmm	KG	Im prod 3000k /beam F22° W38°	CODE	
5	500	40	61	0,11	520	445	LTN01K.9 / ##


● Disponibile solo fascio F | Available only F beam

METODI DI INSTALLAZIONE HOW TO FIXED

CARTONGESSO/PLASTERBOARD




LATERIZIO/BRICKWALL



NYX Q50

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION Ø 55

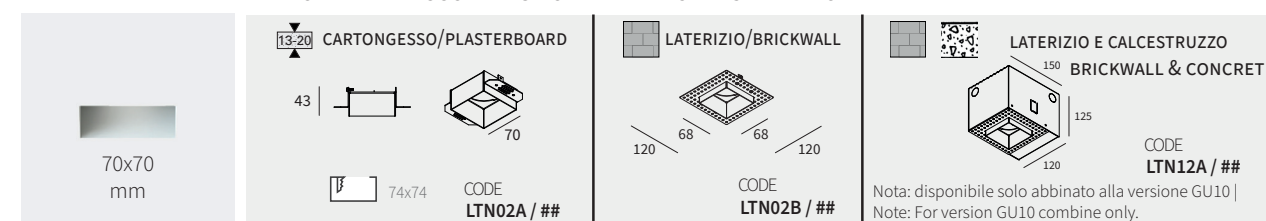

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED		Ø 60		Ø 60		Im product / beam 3000K		CODE	
W	mA	ømm	Hmm	Kg	S15°	F27°	W46°		
8	250	60	73	0,19	860	860	860	LTN88K.9 / ##	
12	350	60	73	0,19	1285	1285	1285	LTN10K.9 / ##	
18	500	60	93	0,22	1575	1575	1579		

Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver

GU10



GU10 LED		Ø 60		H 67		Kg		CODE	
W	ømm	Hmm	Kg						
50	60	67	0,09					LTN16K / ##	

Accessori - accessories: L050#: lente Ø 50
Nota: Alla versione GU10 è possibile abbinare soltanto la lente L###R nido d'ape | Note: For version GU10 combine L###R honey comb only. "L050R / ##" a pagina 83 | see page "L050R / ##" a pagina 83

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali
- **FASCIO/BEAM**
- S Spot
- F Flood
- W Wide

/ ## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 49 bronzo | bronze

/ ## FINITURA PREMIUM | PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo antico | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x.## /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 / ## finishing
base code kelvin beam

DRIVERS VEDI | SEE P.452

NYX TF

TONDO FISSO RASATO
ROUND FIXED TRIMLESS

DOWNLIGHT

VERSIONI / VERSIONS



FINITURE / FINISHINGS



NYX T35F

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE
CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL** **LED** **LED**

W	mA	ømm	Hmm	Kg	Improd/beam 3000k	CODE
5	500	40	84	0,11	520	LTN30K.9 F / ##

● Disponibile solo fascio **F** | Available only **F** beam

NYX T50F

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE
CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL** **LATERIZIO E CALCESTRUZZO / BRICKWALL & CONCRETE** **LED** **LED**

W	mA	ømm	Hmm	Kg	Im product/beam 3000K	CODE
8	250	55	70	0,28	860 860 860	LTN89K.9 ●●● / ##
12	350	55	70	0,28	1285 1285 1285	

●●● Disponibile solo fascio **F** | Available only **F** beam

LED

W	mA	ømm	Hmm	Kg	Im product/beam 3000K	CODE
12	350	55	90	0,30	1285 1285 1289	LTN50K.9 ●●● / ##
18	500	55	90	0,30	1575 1575 1579	

●●● Disponibile solo fascio **F** | Available only **F** beam

GU10

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED **LED**

W	ømm	Hmm	Kg	CODE
50	55	94	0,21	LTN56K / ##

Accessori - accessories: L050#: lente Ø 50
Nota: Alla versione GU10 è possibile abbinare soltanto la lente L###R nido d'ape | Note: For version GU10 combine L###R honey comb only.

NYX T80F

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE
CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL** **LED** **LED**

W	mA	ø	H	Kg	Im product/beam 3000K	CODE
17	500	90	136	0,80	1930 1827 1905	LTN20K.9 ●●● / ##
24,3	700	90	136	0,80	2468 2356 2430	

Accessori - accessories: L074#: lente Ø 74 - satin Ø 74 Gli apparecchi con temperatura colore Tunable white devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

NYX T111F

1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE
CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL** **LED** **LED**

W	mA	ø	H	Kg	Im product/beam 3000K	CODE
24,3	700	120	168	1,43	2468 2356 2430	LTN70K.9 ●●● / ##
32	900	120	168	1,43	3006 2885 2955	

Accessori - accessories: L111#: lente Ø 111 - lens Ø 111

ACCESSORI / ACCESSORIES

LENTI NYX T50 / LENSES NYX T50

	ø	Kg	CODE
LENTE SATINATA / SATINED LENS	50	0,01	L050S / ##
LENTE ELISSOIDALE / ELIPSOID LENS	50	0,01	L050E / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	50	0,01	L050A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	50	0,01	L050R / ##

LENTI NYX T80 / LENSES NYX T80

	ø	Kg	CODE
LENTE SATINATA / SATINED LENS	74	0,01	L080S / ##
LENTE ELISSOIDALE / ELIPSOID LENS	74	0,01	L080E / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	74	0,01	L080A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	74	0,01	L080R / ##

LENTI NYX T111 / LENSES NYX T111

	ø	Kg	CODE
LENTE SATINATA / SATINED LENS	111	0,01	L111S / ##
LENTE ELISSOIDALE / ELIPSOID LENS	111	0,01	L111E / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	111	0,01	L111A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	111	0,01	L111R / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN**
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
 - TW Tunable White Dali
- FASCIO / BEAM**
 - S Spot
 - F Flood
 - W Wide

/ ## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 49 bronzo | bronze

/ ## FINITURA PREMIUM | PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo anticato | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 | ●● / ## — finishing
base code | kelvin | beam

TW 350 250
500 700 900

DRIVERS VEDI | SEE P.452



NYX TD
TONDO ORIENTABILE RASATO
ROUND Adjustable TRIMLESS



DOWNLIGHT


VERSIONI | VERSIONS



FINITURE | FINISHINGS



NYX T35D



1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL**

13-20 50 50 55 75 055

ø mm inner-outer 55-65

120 120 055,5

CODE **LTN04A** CODE **LTN04B**

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED W mA ø H Kg Im product/beam 3000K

W	mA	ø	H	Kg	S15°	F22°	W38°	CODE
5	500	55	74	0,15	520			LTN40K.9 ●● / ##

● Disponibile solo fascio F | Available only F beam

NYX T50D



1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL** **LATERIZIO E CALCESTRUZZO BRICKWALL & CONCRETE**

13-20 50 50 70 90 070

ø mm inner-outer 70-80

250 250 070,5

150 125 120

CODE **LTN05A** CODE **LTN05B** CODE **LTN15A**

Nota: disponibile solo abbinato alla versione GU10 | Note: For version GU10 combine only.

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED W mA ø H Kg Im product/beam 3000K

W	mA	ø	H	Kg	S15°	F27°	W46°	CODE
8	250	70	85	0,55	860	860	860	LTN69K.9 ●● / ##
12	350	70	85	0,55	1285	1285	1285	

LED W mA ø mm H Kg Im product/beam 3000K

W	mA	ø	H	Kg	S15°	F27°	W46°	CODE
12	350	70	105	0,38	1285	1285	1285	LTN60K.9 ●● / ##
18	500	70	105	0,38	1575	1575	1575	

Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

GU10 W ø H Kg CODE

W	ø	H	Kg	CODE
1x max 50	70	80	0,21	LTN66K / ##

Accessori - accessories: L050#: lente ø 50
Nota: Alla versione GU10 è possibile abbinare soltanto la lente L###R nido d'ape | Note: For version GU10 combine L###R honey comb only.

NYX T80D



1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL**

13-20 50 50 105 125 0120

ø mm inner - outer 105-120

250 250 0105,5

CODE **LTN08A** CODE **LTN08B**

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED W mA ø H Kg Im product/beam 3000K

W	mA	ø	H	Kg	S15°	F24°	W38°	CODE
17	500	105	127	0,9	1930	1827	1905	LTN25K.9 ●● / ##
24,3	700	105	127	0,9	2468	2356	2430	

Accessori - accessories: L074#: lente ø 74 - satin ø 74 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

NYX T111D



1 SCEGLIERE CASSA O TELAIO IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

CARTONGESSO/PLASTERBOARD **LATERIZIO/BRICKWALL**

13-20 50 50 140 150 0130

ø mm inner - outer 132-140

250 250 0131

CODE **LTN09A** CODE **LTN09B**


2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED W mA ø H Kg Im product/beam 3000K

W	mA	ø	H	Kg	S16°	F25°	W40°	CODE
24,3	700	140	168	0,9	2468	2356	2430	LTN80K.9 ●● / ##
32	900	140	168	0,9	3006	2885	2955	

Accessori - accessories: L111#: lente ø 111 - lens ø 111

NYX T-SPOT 55



CARTONGESSO/PLASTERBOARD

13-20 55 14 107 0107

LED W mA ø H Kg Im product/beam 3000K

W	mA	ø	H	Kg	F27°	W46°	CODE
12	350	55	155	1285	1289		LTN90.9 ●● / ##
18	500	55	155	1575	1579		

ACCESSORI / ACCESSORIES

LENTI NYX T50 / LENSES NYX T50				LENTI NYX T80 / LENSES NYX T80				LENTI NYX T111 / LENSES NYX T111			
ø	Kg	CODE		ø	Kg	CODE		ø	Kg	CODE	
50	0,01	L050S / ##		74	0,01	L080S / ##		111	0,01	L111S / ##	
50	0,01	L050E / ##		74	0,01	L080E / ##		111	0,01	L111E / ##	
50	0,01	L050A / ##		74	0,01	L080A / ##		111	0,01	L111A / ##	
50	0,01	L050R / ##		74	0,01	L080R / ##		111	0,01	L111R / ##	

VERSIONI DISPONIBILI / AVAILABLE VERSION

● **KELVIN** ○ **KELVIN** / ## **FINITURA** | FINISHING

27 2700K 27 2700K / 01 bianco | white

30 3000K 30 3000K / 02 nero | black

35 3500K 35 3500K / 49 bronzo | bronze

40 4000K 40 4000K

TW Tunable White Dali

● **FASCIO / BEAM** / ## **FINITURA PREMIUM** / PREMIUM FINISHING

S Spot / 81 oro rosa / rose gold

F Flood / 82 bronzo anticato | antique bronze

W Wide / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● / ##
HOW TO CREATE THE CODE: **F1000.827S / 01**

CODE
F1000.8 ●● / ## finishing

base code kelvin beam

DRIVERS VEDI | P.452

Per i gradi vedere in tabella - For degrees check the table

NYX FRAME

FISSO - FIXED



VERSIONI / VERSIONS



FINITURE / FINISHINGS



VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

- TW Tunable White Dali
- **FASCIO / BEAM**
- S Spot
- F Flood
- W Wide

FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 36 oro | gold
- / 49 bronzo | bronze

FINITURA PREMIUM / PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo anticato|antique bronze
- / 83 ottone brunito spazzolato|brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: **F1000.827S / 01**

CODE
F1000.8 | ● | ● | ## — finishing
 base code kelvin beam


DRIVERS VEDI | SEE P.452

88

Per i gradi vedere in tabella -
For degrees check the table

NYX TF35F

CARTONGESSO/PLASTERBOARD




LED						Im product/beam 3000K			
W	mA	ø	H	Kg	F22°	W46°	CODE		
5	500	60	78	0,18	520		NF010.9 ●● / ##	500	

● Disponibile solo fascio F | Available only F beam

NYX TF50F


CARTONGESSO/PLASTERBOARD



LED						Im product/beam 3000K			
W	mA	ø	H	Kg	F27°	W46°	CODE		
8	250	75	102	0,25	860	860	NF024.9 ●● / ##	250 350	
12	350	75	102	0,25	1285	1285			

LED						Im product/beam 3000K			
W	mA	ø	H	Kg	F27°	W46°	CODE		
12	350	75	122	0,25	1285	1289	NF023.9 ●● / ##	350 500	
18	500	75	122	0,25	1575	1579			

GU10




GU10LED						CODE	
W	ø	H	Kg				
1 x max50	75	86	0,25			NF028 / ##	

Accessori - accessories: L050#: lente ø 50 - lens ø 50
 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

NYX TF80F

PER CARTONGESSO/ FOR PLASTERBOARD




LED						Im product/beam 3000K				
W	mA	ø	H	Kg	S15°	F24°	W38°	CODE		
17	500	110	130	0,85	1930	1827	1905	NF040.9 ●● / ##	350 500 700	
24,3	700	110	130	0,85	2468	2356	2430			

Accessori - accessories: L074#: lente ø 74 - lens ø 74
 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

NYX TF111F

PER CARTONGESSO/ FOR PLASTERBOARD



LED						Im product/beam 3000K				
W	mA	ø	H	Kg	S16°	F25°	W40°	CODE		
24,3	700	140	160	1,4	2468	2356	2430	NF060.9 ●● / ##	700 900	
32	900	140	160	1,4	3006	2885	2955			

Accessori - accessories: L111#: lente ø 111 - lens ø 111

ACCESSORI / ACCESSORIES

LENTI NYX T50 / LENSES NYX T50

	ø	Kg	CODE
LENTE SATINATA / SATINED LENS	50	0,01	L050S / ##
LENTE ELISSOIDALE / ELIPSOID LENS	50	0,01	L050E / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	50	0,01	L050A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	50	0,01	L050R / ##

LENTI NYX T80 / LENSES NYX T80

	ø	Kg	CODE
	74	0,01	L080S / ##
	74	0,01	L080E / ##
	74	0,01	L080A / ##
	74	0,01	L080R / ##



LENTI NYX T111 / LENSES NYX T111

	ø	Kg	CODE
	111	0,01	L111S / ##
	111	0,01	L111E / ##
	111	0,01	L111A / ##
	111	0,01	L111R / ##

89

NYX FRAME

ORIENTABILE - ADJUSTABLE

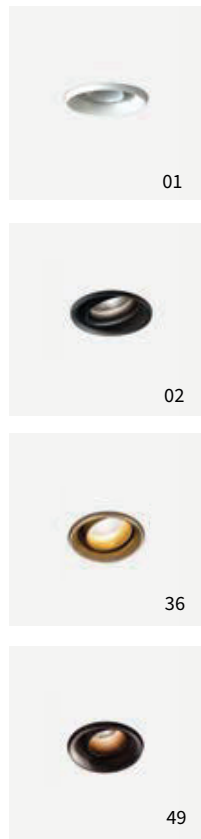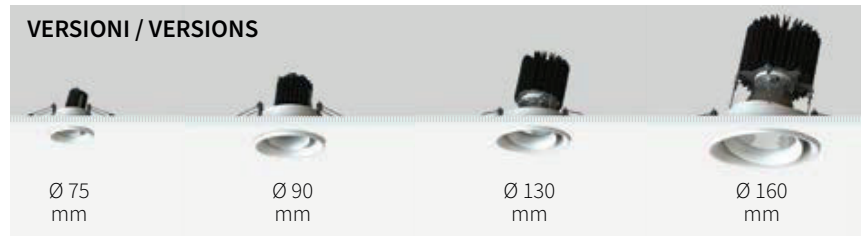

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

- FASCIO / BEAM**
- S Spot
- F Flood
- W Wide

FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 36 oro | gold
- / 49 bronzo | bronze

FINITURA PREMIUM / PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo anticato | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: **F1000.827S / 01**


CODE
F1000.8 | ●● | / ## finishing
 base code kelvin beam

250 350 500
TW 700 900
DRIVERS VEDI | SEE P.452

NYX TF35D



CARTONGESSO/PLASTERBOARD



LED		Im product / beam 3000K		CODE					
W	mA	ø	H	α	Kg	F22°	W46°		
5	500	75	78	20	0,28	520			NF015.9 ●● / ##

● Disponibile solo fascio F | Available only F beam




500

NYX TF50D



CARTONGESSO/PLASTERBOARD




LED		Im product / beam 3000K		CODE					
W	mA	ø	H	α	Kg	F27°	W46°		
8	250	90	94	20	0,35	860	860		NF031.9 ●● / ##
12	350	90	94	20	0,35	1285	1285		



250 350

LED		Im product / beam 3000K		CODE					
W	mA	ø	H	α	Kg	F27°	W46°		
12	350	90	114	20	0,35	1285	1289		NF033.9 ●● / ##
18	500	90	114	20	0,35	1575	1579		

Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.



GU10 LED		CODE			
W	ø	H	α	Kg	
50	90	84	20	0,32	NF038 / ##




Accessori - accessories: L050#: lente ø 50 - lens ø 50
 Nota: Alla versione GU10 è possibile abbinare soltanto la lente L##R nido d'ape | Note: For version GU10 combine L##R honey comb only.

NYX TF80D



CARTONGESSO/PLASTERBOARD



LED		Im product / beam 3000K		CODE					
W	mA	ø	H	α	Kg	S15°	F24°	W38°	
17	500	130	135	20	1	1546	1645	1730	NF050.9 ●● / ##
24,3	700	130	135	20	1	2045	2160	2250	




500 700

Accessori - accessories: L074#: lente ø 74 - lens ø 74 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

NYX TF111D



CARTONGESSO/PLASTERBOARD



LED		Im product / beam 3000K		CODE					
W	mA	ø	H	α	Kg	S15°	F24°	W38°	
24,3	700	160	165	20	1,65	2468	2356	2430	NF070.9 ●● / ##
32	900	160	165	20	1,65	3006	2885	2955	



700 900

Accessori - accessories: L111#: lente ø 111 - lens ø 111

ACCESSORI / ACCESSORIES

LENTI NYX Q50 / LENSES NYX Q50				LENTI NYX Q80 / LENSES NYX Q80				LENTI NYX Q111 / LENSES NYX Q111			
ø	Kg	CODE		ø	Kg	CODE		ø	Kg	CODE	
50	0,01	L050S / ##		74	0,01	L080S / ##		111	0,01	L111S / ##	
50	0,01	L050E / ##		74	0,01	L080E / ##		111	0,01	L111E / ##	
50	0,01	L050A / ##		74	0,01	L080A / ##		111	0,01	L111A / ##	
50	0,01	L050R / ##		74	0,01	L080R / ##		111	0,01	L111R / ##	



Apparecchio da incasso trimless per installazioni in controsoffitto in cartongesso con sorgente luminosa in posizione arretrata antiabbagliamento UGR<19. Provvisto di cilindro estraibile dalla sede di incasso fino a 6 o 10 cm., a seconda del modello. Con sorgente LED Chip On Board integrata o per lampade alogene / led GU10 230V / 240V. Corpo e gruppo ottico in alluminio verniciato. Alimentazione remota disponibile come accessorio. Grado di protezione IP54.

Trimless recessed luminaire for plasterboard ceiling installations with light source in the anti-glare recessed position UGR <19. Provided with a cylinder that can be extracted from the built-in seat up to 6 or 10 cm, depending on the model. Integrated Chip On Board LED source or for halogen / led lamps GU10 230V / 240V. Body and optical group in painted aluminum. Remote power supply available as an accessory. IP54.




NYX TUBE 35

CARTONGESSO/PLASTERBOARD

8-30 0 40 0 65

IP20 IP54 CRI >90 500



LED		mA		Ø		H		lm product / beam 3000K		CODE	
5	500	40	84 / 144	520	F22°					LTN30T.9 ●● / ##	

● Disponibile solo fascio F | Available only F beam


QR-CB35 GU4 12V		Ø		H		CODE	
35	40	76 / 136			LTN34T / ##		

NYX TUBE 50

CARTONGESSO/PLASTERBOARD

8-30 0 55 0 75

IP20 IP54 CRI >90 250 350




LED		mA		Ø		H		lm product / beam 3000K		CODE	
8	250	90	112 / 212	860	S17°					LTN69T.9 ●● / ##	
12	350	90	112 / 212	1285							

LED		mA		A		Ø		H		lm product / beam 3000K		CODE	
12	350	55	132 / 232	550	S17°							LTN50T.9 ●● / ##	
18	500	55	132 / 232	657									

Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

GU10 LED		Ø		H		CODE	
50	55	98 / 198			LTN56T / ##		

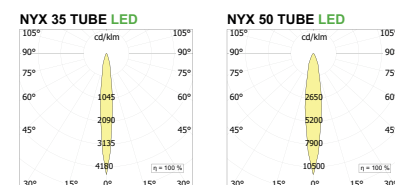

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

- FASCIO / BEAM
- S Flood
- F Flood

/## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 49 bronzo | bronze

/## FINITURA PREMIUM / PREMIUM FINISHING

- / 81 oro rosa / rose gold
- / 82 bronzo anticato|antique bronze
- / 83 ottone brunito spazzolato|brushed burnished brass


COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: F1000.827S / 01


CODE
F1000.8 | ●● / ## — finishing
base code kelvin beam

TW 700 350 500
DRIVERS VEDI | SEE P.452



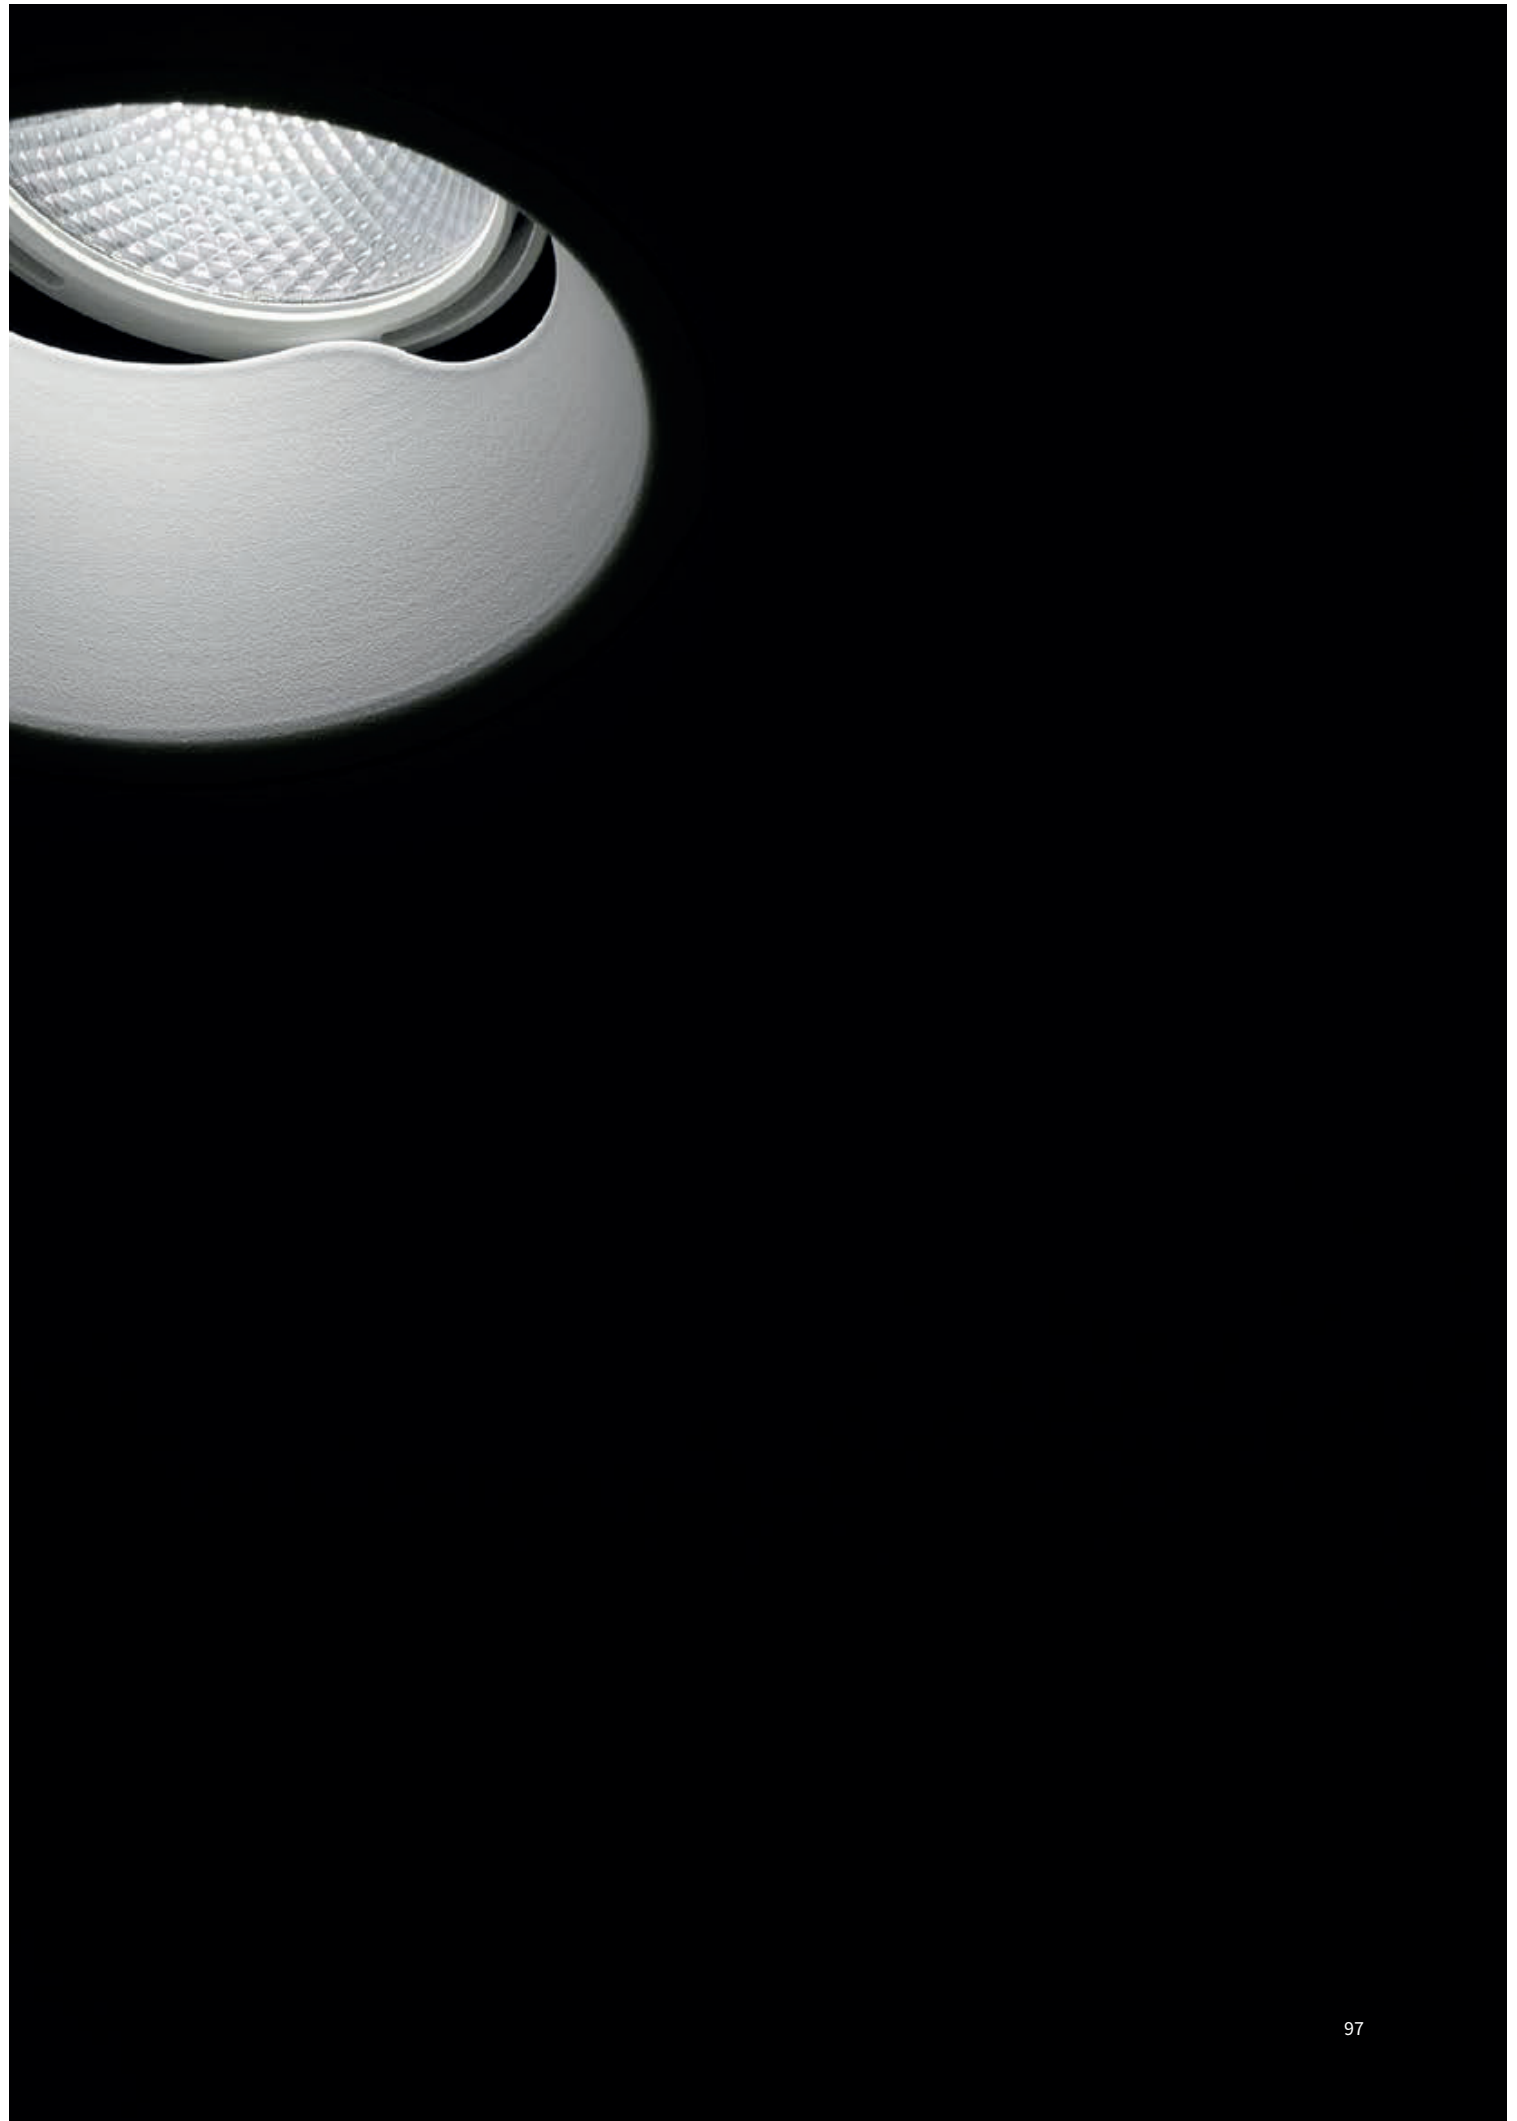

TWENTY 7

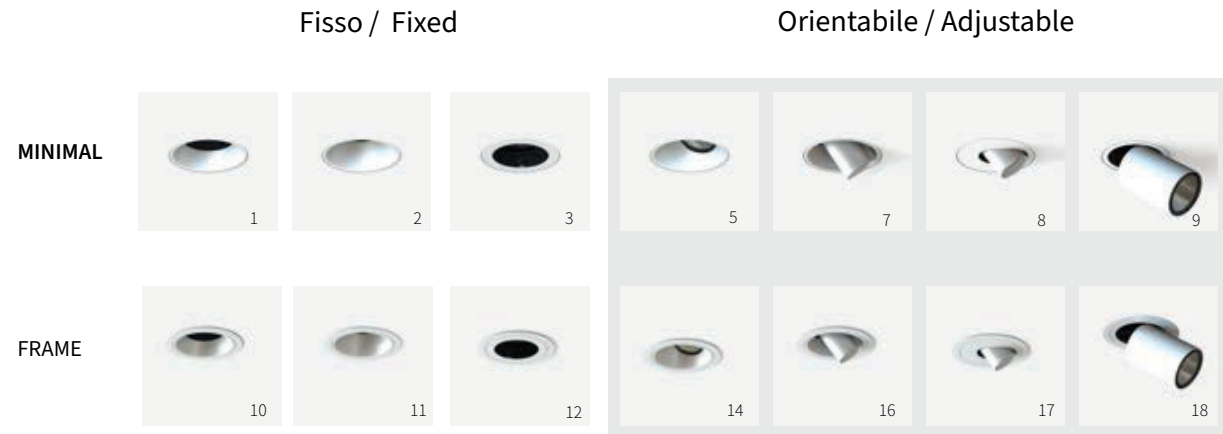

Famiglia di apparecchi da incasso e proiettori da incasso a soffitto per sorgenti LED Chip On Board integrate. Studiati per ottenere, mediante la semplice aggiunta di accessori al corpo lampada, 14 diverse soluzioni illuminotecniche, come varianti delle seguenti emissioni base: diffusa, spot, bassa luminanza e asimmetrica. Disponibili sia in versione rotonda per incasso trimless oppure rotonda con cornice. Disponibilità di molteplici varianti, basculanti con meccanismo roto-traslante oppure con corpo estraibile. Corpo lampada e gruppo ottico in alluminio verniciato, riflettore metallizzato in alluminio 99,99%. Cover coniche in alluminio, per emissioni a bassa luminanza, diffuse o asimmetriche, provviste di sistema di fissaggio e sgancio dal gruppo ottico, mediante calamite, Click and Play. Filtri ottici, satinati, Fresnel e microprismatici (UGR<19) in policarbonato. Griglia a nido d'ape antiabbagliamento in alluminio verniciato. Cover di chiusura inferiori in alluminio verniciato, con foro ellittico, quadrato e tondo, per nascondere l'emissione luminosa. Grado di protezione IP23 / IP43.

Family of recessed luminaires and recessed ceiling projectors for integrated Chip On Board LED sources. Designed to obtain, by simply adding accessories to the lamp body, 14 different lighting solutions, as variants of the following basic emissions: diffuse, spot, low luminance and asymmetric. Available both in round trimless recessed version, or round and square framed. Multiple variants available, tilting with roto-translating mechanism or with extractable body. Body and optical group in painted aluminum, metallized reflector in 99.99% aluminum. Conical aluminum covers, for low luminance emissions, diffused or asymmetrical, equipped with fixing and release system from the optical unit, using magnets, Click and Play. Optical filters, satinated, Fresnel and microprismatic (UGR<19) in polycarbonate. Anti-glare honeycomb grid in painted aluminum. Closing covers in painted aluminum, with elliptical, square and round hole, to hide the light emission. IP23 / IP43.

FINITURE / FINISHINGS



01-BIANCO / WHITE



02-NERO / BLACK

FINITURE PREMIUM / PREMIUM FINISHINGS



81-ORO ROSA / PINK GOLD



82- BRONZO ANTICATO/ ANTIQUE BRONZE



83 - OTTONE BRUNITO SPAZZOLATO/BRUSHED BURNISHED BRASS



1



2



81



82



83



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL




GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.




Possibilità di montare lampade adatte alla crescita delle piante indoor / Horticulture version suitable for growth indoor. L'illuminazione adatta al verde converte l'energia elettrica in fotoni che stimolano la fotosintesi delle piante anche in assenza di luce naturale.

EASY RE-FITTING

Twenty7 è provvisto di sistema Click&Play di fissaggio e sgancio delle cover al gruppo ottico mediante calamite.

Twenty7 is provided with Click&Play magnetic lock-unlock system of the cover to optical group.

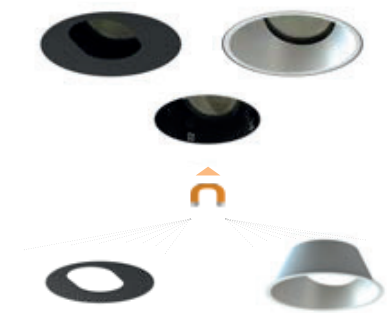

KELVIN

27	2700°K
30	3000°K
35	3500°K
40	4000°K
HC	HORTICULTURE
TW	TUNABLE WHITE*




FASCIO / BEAM

S	SPOT
F	FLOOD
W	WIDE



* Tunable White 2700 – 5000°K
La tecnologia Tunable White consente di controllare la temperatura di colore delle sorgenti luminose permettendo di scegliere quella più adatta tra luce bianca calda e fredda. / Tunable White technology allows you to control the color temperature of light sources allowing you to choose the most suitable between warm and cold white light.

CURVE FOTOMETRICHE / PHOTOMETRIC DATA




TWENTY COVER CONICA



TWENTY FOCUS 55




TWENTY FOCUS 90




TWENTY7 MINIMAL

TELAIO OBBLIGATORIO MANDATORY RING



Dim.	H	Kg	CODE
Ø132	55	0,17	TW001

1 FISSO MINIMAL-COVER CONICA BASSA MINIMAL FIXED- LOW CONICAL COVER




LED W	mA	Ø	H	Im product/beam 3000K	W41°	CODE
17	500	131	130	1415		TW100.9 ● ● / ##
24,3	700	131	130	1854		

LED W	mA	Ø	H	Im product/beam 3000K	W41°	CODE
32	900	131	160	3645		TW101.9 ● ● / ##

● disponibile solo fascio W available only W beam
Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - Accessories minimal ring mandatory
L105#: lente Ø 105 - lens Ø 105

2 FISSO MINIMAL-COVER CONICA ALTA MINIMAL FIXED-HIGH CONICAL COVER




LED W	mA	Ø	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
17	500	131	130	1930	1827	1905		TW102.9 ● ● / ##
24,3	700	131	130	2468	2356	2430		

LED W	mA	Ø	H	S15°	F24°	W38°	CODE
32	900	131	160	3006	2885	2955	TW103.9 ● ● / ##

Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

3 FISSO MINIMAL-COVER PIANA TONDA MINIMAL FIXED-ROUND FLAT COVER




LED W	mA	Ø	H	Im product/beam 3000K	S15°	F21°	CODE
17	500	131	130	1080	1185		TW104.9 ● ● / ##
24,3	700	131	130	1404	1452		

LED W	mA	Ø	H	Im product/beam 3000K	S15°	F21°	CODE
32	900	131	160	2113	2326		TW105.9 ● ● / ##

Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L105#: lente Ø 105 - lens Ø 105 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

5 ORIENTABILE MINIMAL-COVER CONICA ELLITTICA 5 MINIMAL ADJUSTABLE-CONICAL-ELLIPTICAL COVER




LED W	mA	Ø	H	Im product/beam 3000K	S15°	F24°	W41°	CODE
17	500	131	130	1080	1212	1697		TW112.9 ● ● / ##
24,3	700	131	130	1404	1626	2233		

LED W	mA	Ø	H	Im product/beam 3000K	S15°	F24°	W41°	CODE
32	900	131	160	3620	2326	3645		TW113.9 ● ● / ##

● Disponibile anche HC Horticulture Available HC Horticulture version
Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L85#: lente Ø 85 - lens Ø 85. Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


7 ORIENTABILE MINIMAL-COVER CONICA + FOCUS 55 7 MINIMAL ADJUSTABLE-FOCUS 55 CONICAL COVER



LED W	mA	Ø	H	Im product/beam 3000K	S15°	F27°	W46°	CODE
12	350	131	100	1285	1285	1289		TW115.9 ● ● / ##
18	500	131	100	1575	1575	1579		

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L55#: lente Ø 55 - lens Ø 55
Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


8 ORIENTABILE MINIMAL-COVER PIANA ELLITTICA+ FOCUS 55 8 MINIMAL ADJUSTABLE-FOCUS 55 FLAT-ELLIPTICAL COVER



LED W	mA	Ø	H	Im product/beam 3000K	S15°	F27°	W46°	CODE
12	350	131	100	1285	1285	1289		TW114.9 ● ● / ##
18	500	131	100	1575	1575	1579		

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L55#: lente Ø 55 - lens Ø 55.
Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

9 ORIENTABILE MINIMAL-FOCUS 90 MINIMAL ADJUSTABLE-FOCUS 90



LED W	mA	Ø	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
17	500	131	130	1930	1827	1905		TW116.9 ● ● / ##
24,3	700	131	130	2468	2356	2430		

LED W	mA	Ø	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
32	900	131	130	3006	2885	2955		TW117.9 ● ● / ##

● Disponibile anche HC Horticulture Available HC Horticulture version

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L85#: lente Ø 85 - lens Ø 85. Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

ACCESSORI / ACCESSORIES

LENTI 55 / LENSES 55

LENTI 55 / LENSES 55	Ø	Kg	CODE
LENTE SATINATA / SATINED LENS	55	0,01	L055.A / ##
LENTE ELISSOIDALE / ELIPSOID LENS	55	0,01	L055.E.A / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	55	0,01	L055.A.A / ##
FILTRO NIDO D'APIE / HONEY COMB LOUVER	55	0,01	L055.R.A / ##

LENTI 85 / LENSES NYX 85

LENTI 85 / LENSES NYX 85	Ø	Kg	CODE
	85	0,01	L085.S.A / ##
	85	0,01	L085.E.A / ##
	85	0,01	L085.A.A / ##
	85	0,01	L085.R.A / ##

LENTI 115 / LENSES NYX 115

LENTI 115 / LENSES NYX 115	Ø	Kg	CODE
	115	0,01	L0115.S.A / ##
	115	0,01	L0115.E.A / ##
	115	0,01	L0115.A.A / ##
	115	0,01	L0115.R.A / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN	○ KELVIN
27 2700K	27 2700K
30 3000K	30 3000K
35 3500K	35 3500K
40 4000K	40 4000K
HC Horticulture	
TW Tunable White Dali	
● FASCIO / BEAM	
S Spot	
F Flood	
W Wide	

/ ## FINITURA | FINISHING

□	/ 01 bianco white
■	/ 02 nero black
■	/ 49 bronzo bronze

/ ## FINITURA PREMIUM | PREMIUM FINISHING

■	/ 81 oro rosa rose gold
■	/ 82 bronzo antico antique bronze
■	/ 83 ottone brunito spazzolato brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ● ● /

HOW TO CREATE THE CODE: **F1000.827S/01**


CODE	base code	kelvin	beam	finishing
F1000.8				

350 500 700 900 TW

DRIVERS VEDI | SEE P.452

TWENTY7 ROUND FRAME

10 TONDA FISSO-COVER CONICA BASSA ROUND FIXED-LOW CONICAL COVER




LED W	mA	ømm	H	lm product/beam 3000K	W41°	CODE
17	500	131	130	1415		TW210.9 ○ W / ##
24,3	700	131	130	1854		

LED W	mA	ømm	H	lm product/beam 3000K	W41°	CODE
32	900	131	160	3645		TW211.9 ○ W / ##

● disponibile solo fascio W available only W beam
Accessori - accessories: L105#: lente Ø 105 - lens Ø 105

11 TONDA FISSO-COVER CONICA ALTA ROUND FIXED-HIGH CONICAL COVER




LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
17	500	131	130	1930	1827	1905		TW212.9 ● ● / ##
24,3	700	131	130	2468	2356	2430		

LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
32	900	131	160	3006	2885	2955		TW213.9 ● ● / ##

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

12 TONDA FISSO-COVER PIANA TONDA ROUND FIXED-ROUND FLAT COVER




LED W	mA	ømm	H	lm product/beam 3000K	S15°	F21°	CODE
17	500	131	130	1080	1185		TW214.9 ● ● / ##
24,3	700	131	130	1404	1452		

LED W	mA	ømm	H	lm product/beam 3000K	S15°	F21°	CODE
32	900	131	160	2113	2326		TW215.9 ● ● / ##

● disponibile solo fascio S e F available only S and F beam

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

14 TONDA ORIENTABILE-COVER CONICA ELLITTICA 14 ROUND ADJUSTABLE-CONICAL-ELLIPTICAL COVER




LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
17	500	131	130	1930	1827	1905		TW220.9 ● ● / ##
24,3	700	131	130	2468	2356	2430		

LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
32	900	131	160	3006	2885	2955		TW221.9 ● ● / ##

● Disponibile anche HC Horticulture Available HC Horticulture version

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


16 TONDA ORIENTABILE-COVER CONICA + FOCUS 55 16 ROUND ADJUSTABLE-FOCUS 55 CONICAL COVER



LED W	mA	ømm	H	lm product/beam 3000K	S15°	F27°	W46°	CODE
12	350	131	130	1285	1285	1289		TW224.9 ● ● / ##
18	500	131	130	1575	1575	1579		

Accessori - accessories: L55#: lente Ø 55 - lens Ø 55 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


17 TONDA ORIENTABILE-COVER PIANA + FOCUS 55 ROUND ADJUSTABLE-FOCUS 55 FLAT COVER



LED W	mA	ømm	H	lm product/beam 3000K	S15°	F27°	W46°	CODE
12	350	131	130	1285	1285	1289		TW225.9
18	500	164	130	1575	1575	1579		

Accessori - accessories: L55#: lente Ø 55 - lens Ø 55 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

18 TONDA ORIENTABILE-FOCUS 90 ROUND ADJUSTABLE-FOCUS 90



LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
17	500	131	130	1930	1827	1905		TW226.9
24,3	700	131	130	2468	2356	2430		

LED W	mA	ømm	H	lm product/beam 3000K	S15°	F24°	W38°	CODE
32	900	131	130	3006	2885	2955		TW227.9

● Disponibile anche HC Horticulture Available HC Horticulture version

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

ACCESSORI / ACCESSORIES

LENTI NYX 55 / LENSES NYX 55

	ø	Kg	CODE
	55	0,01	L055S.A / ##
	55	0,01	L055E.A / ##
	55	0,01	L055A.A / ##
	55	0,01	L055R.A / ##

LENTI NYX 85 / LENSES NYX 85

	ø	Kg	CODE
	85	0,01	L085S.A / ##
	85	0,01	L085E.A / ##
	85	0,01	L085A.A / ##
	85	0,01	L085R.A / ##

LENTI NYX 115 / LENSES NYX 115

	ø	Kg	CODE
	115	0,01	L0115S.A / ##
	115	0,01	L0115E.A / ##
	115	0,01	L0115A.A / ##
	115	0,01	L0115R.A / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

/ ## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 49 bronzo | bronze

/ ## FINITURA PREMIUM | PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo antico | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ● ● /

HOW TO CREATE THE CODE: F1000.827S / 01



CODE
F1000.8 | ● ● / ## — finishing
base code kelvin beam

DRIVERS VEDI | SEE P.452

Per i gradi vedere in tabella - For degrees check the table



LEVA & LEVA QUADRA

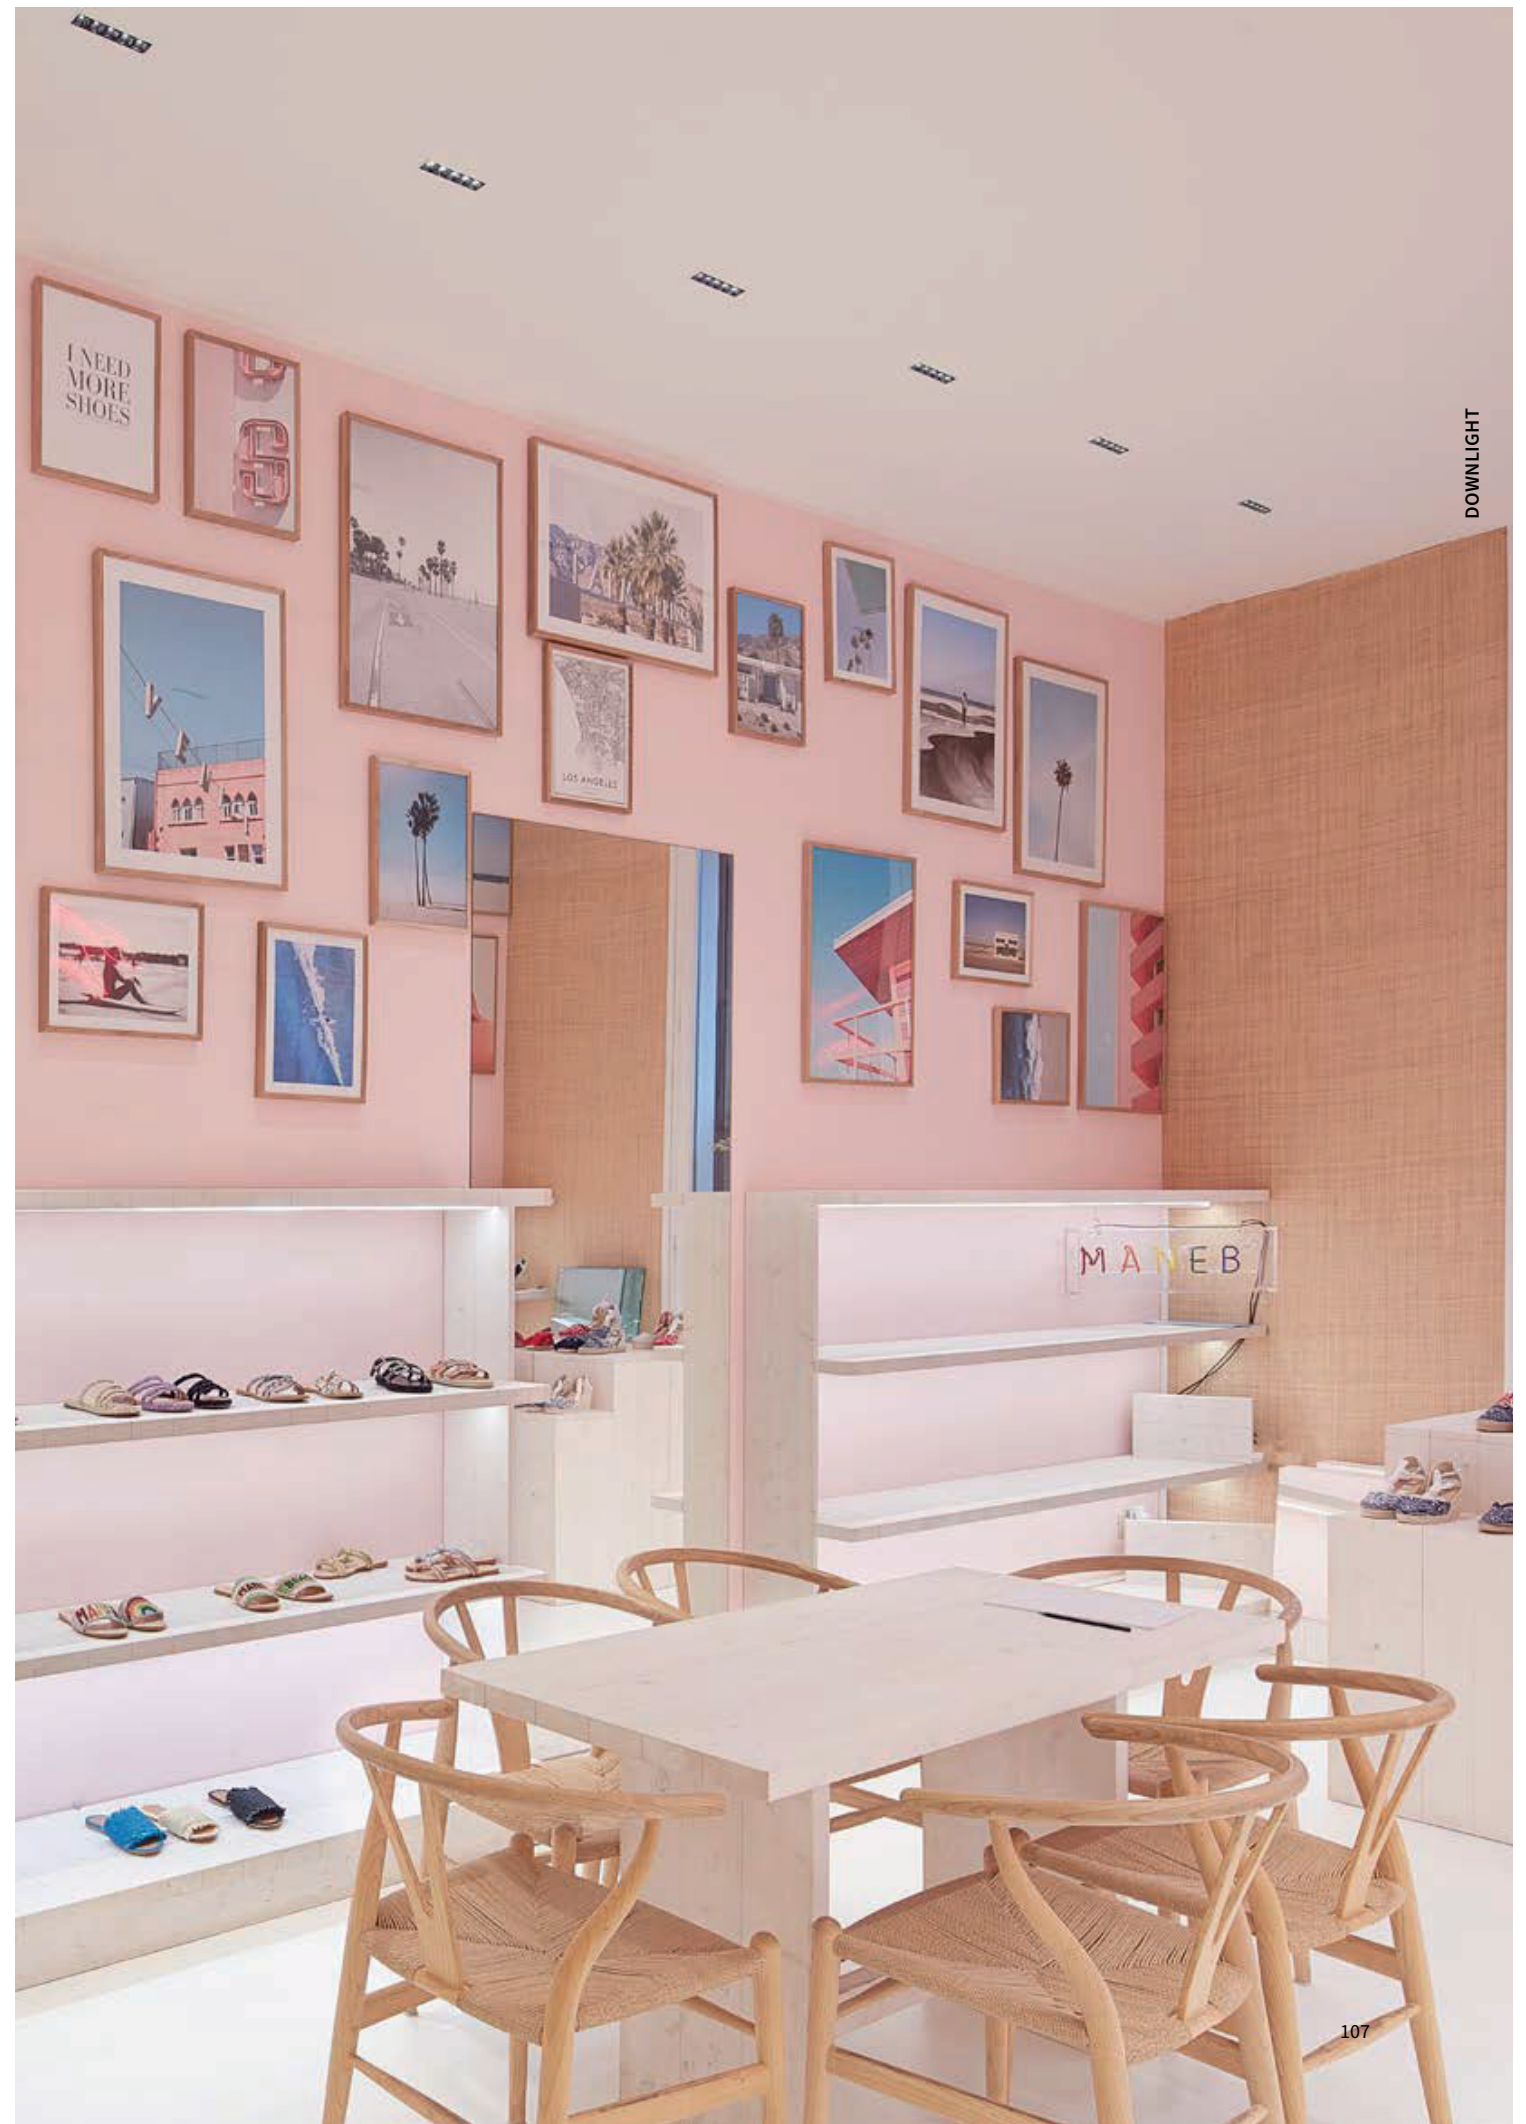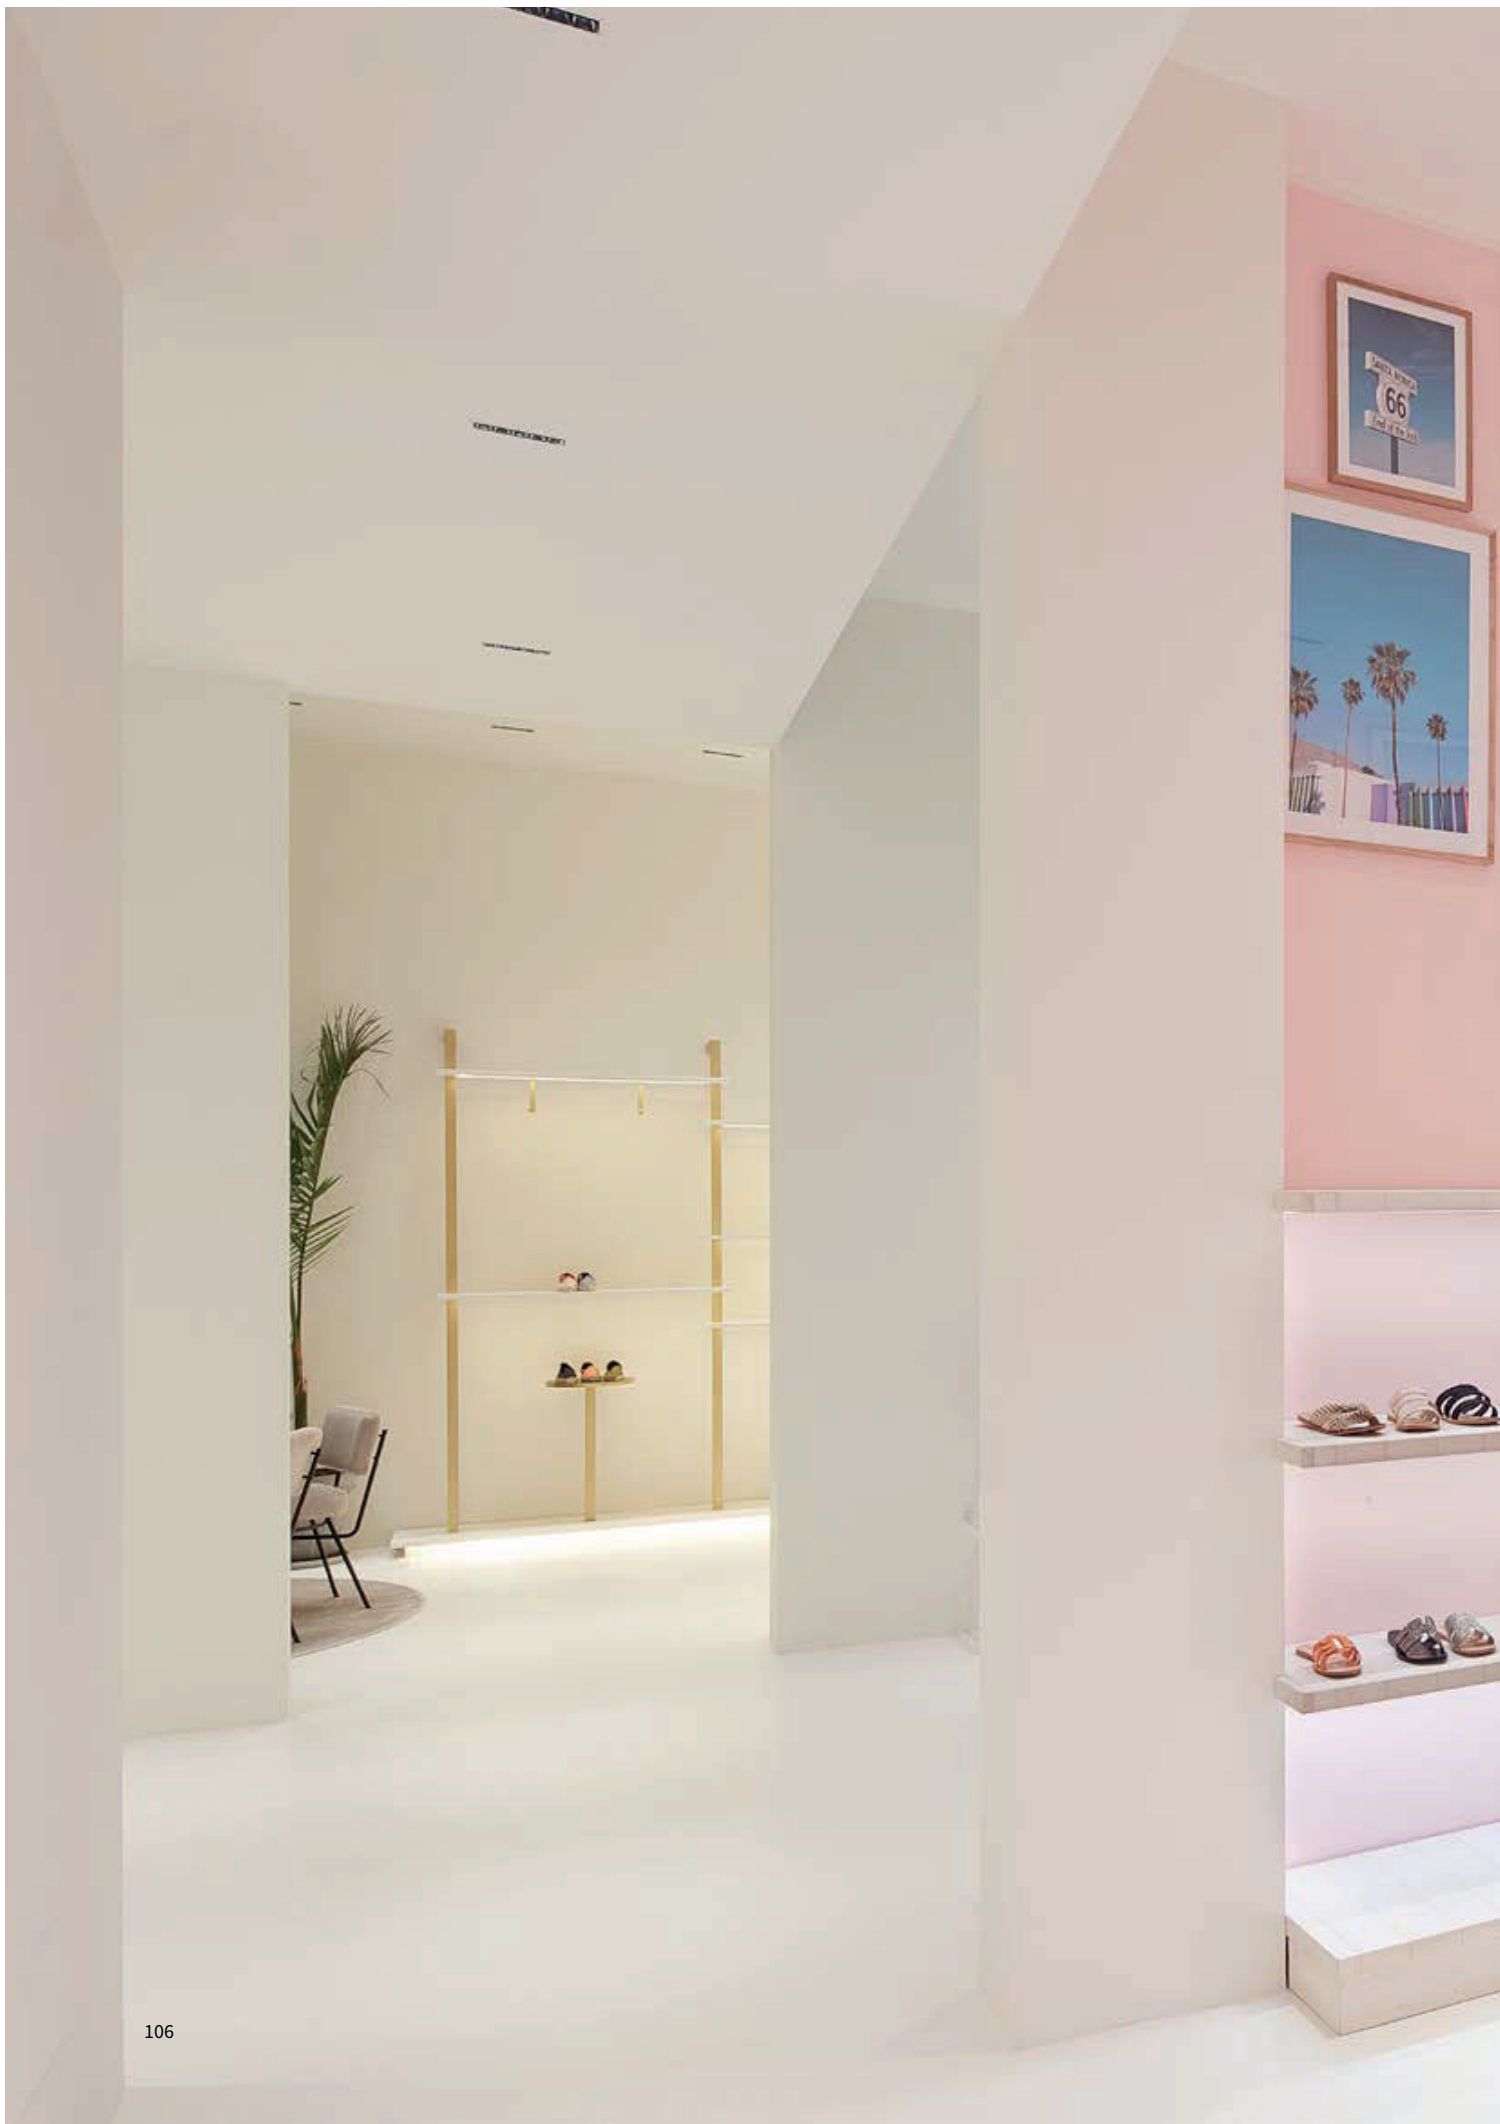

LEVA & LEVA QUADRA

Collezione di apparecchi da incasso, fissi ed orientabili, con sorgenti LED Chip On Board integrate. Possibilità di montaggio trimless o con battuta. Corpo apparecchio in estruso di alluminio verniciato. Gruppi ottici antiabbagliamento completi di led chip on board (CRI>90) e lenti. Ottiche spot, flood, wideflood ed ellittiche UGR<16. Da completare con alimentatori elettronici remoti. Grado di protezione IP20 / IP43.

Recessed luminaires, fixed and adjustable, trimless or trimmed with integrated Chip On Board LED sources. Extruded aluminum painted body. Anti-glare optical groups complete with LED chip on board (CRI> 90) and lenses. Spot, flood, wideflood and elliptical optics UGR <16. To be completed with remote electronic drivers. IP20 / IP43.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE




IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.


KELVIN	FASCIO / BEAM	FINITURE STANDARD / STANDARD FINISHINGS
27 2700°K	S SPOT 20°	/ 01 TELAIO BIANCO OTTICA NERA / WHITE FRAME BLACK OPTIC
30 3000°K	F FLOOD 32°	/ 02 TELAIO NERO OTTICA NERA / BLACK FRAME BLACK OPTIC
35 3500°K	W WIDE 50°	/ 41 TELAIO BIANCO OTTICA BIANCA / WHITE FRAME WHITE OPTIC
40 4000°K	Z ASYMMETRIC 41°X18°	/ 42 TELAIO NERO OTTICA ORO / BLACK FRAME GOLD OPTIC

TW Tunable White 2700 – 5000°K
 La tecnologia Tunable White consente di controllare la temperatura di colore delle sorgenti luminose permettendo di scegliere quella più adatta tra luce bianca calda e fredda. / Tunable White technology allows you to control the color temperature of light sources allowing you to choose the most suitable between warm and cold white light.

FINITURE PREMIUM / PREMIUM FINISHINGS




CURVE FOTOMETRICHE / PHOTOMETRIC DATA

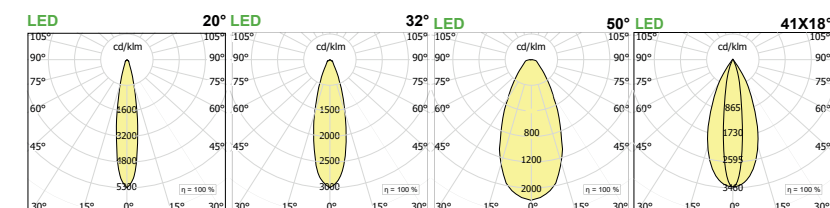


LEVA COLLECTION


MINIMAL SERIE
LINEARI / LINEAR VERSION

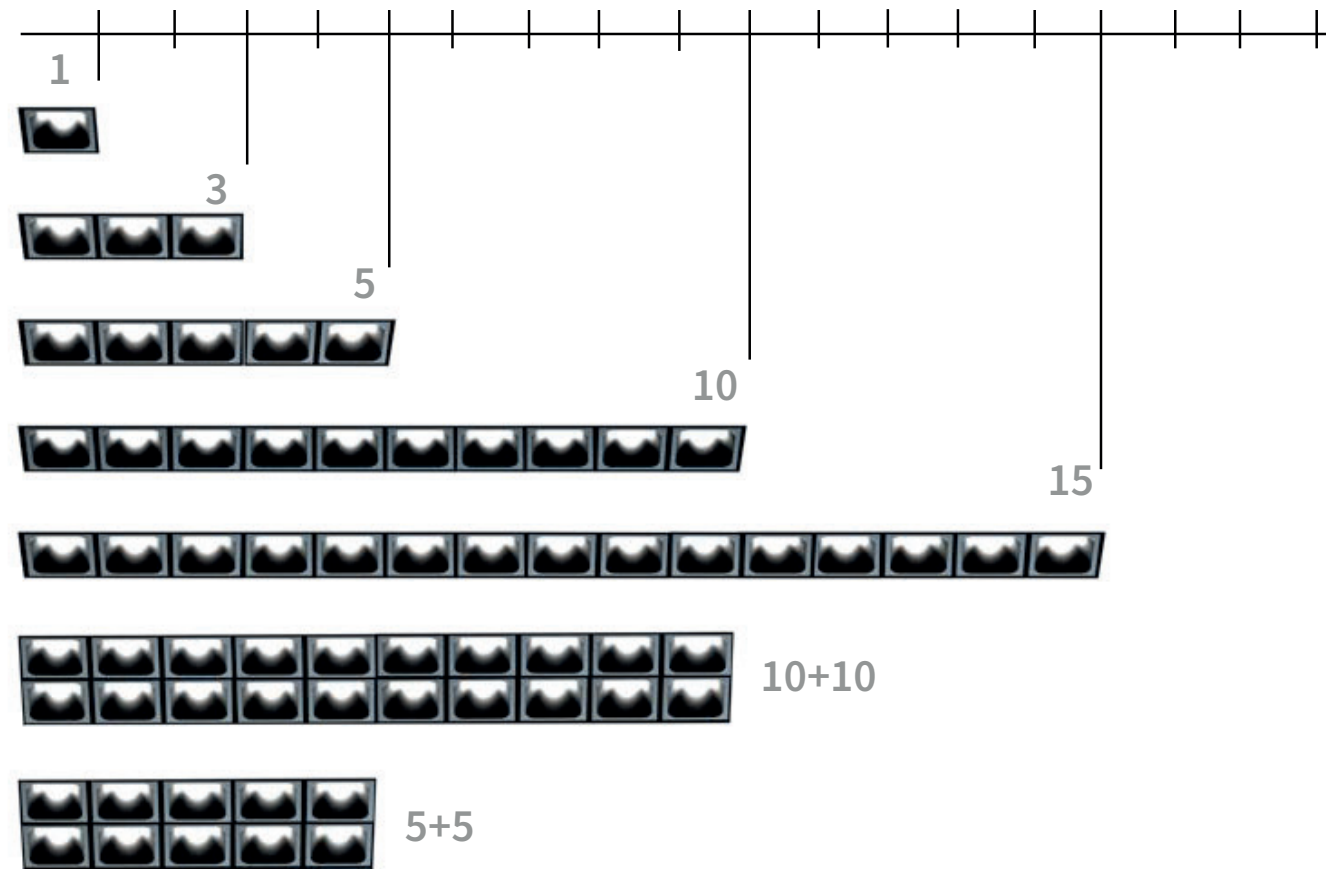

QUADRA

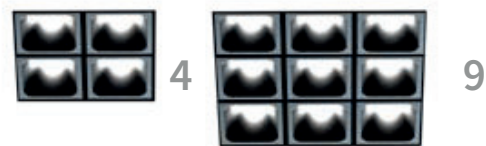


BASCULANTI / TILT VERSION

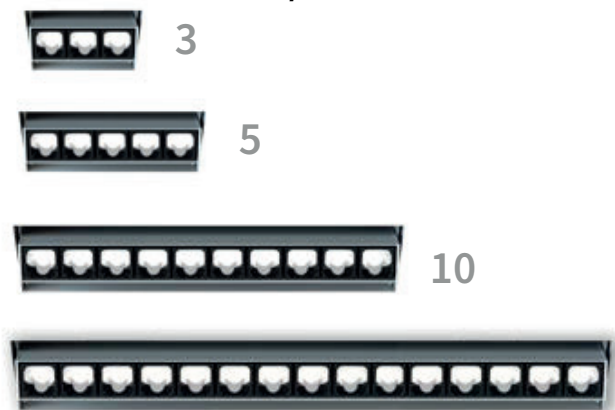

ROTOTRASLANTE /
SOFT ROTATE
& SLIDE




FRAME SERIE
LINEARI / LINEAR VERSION

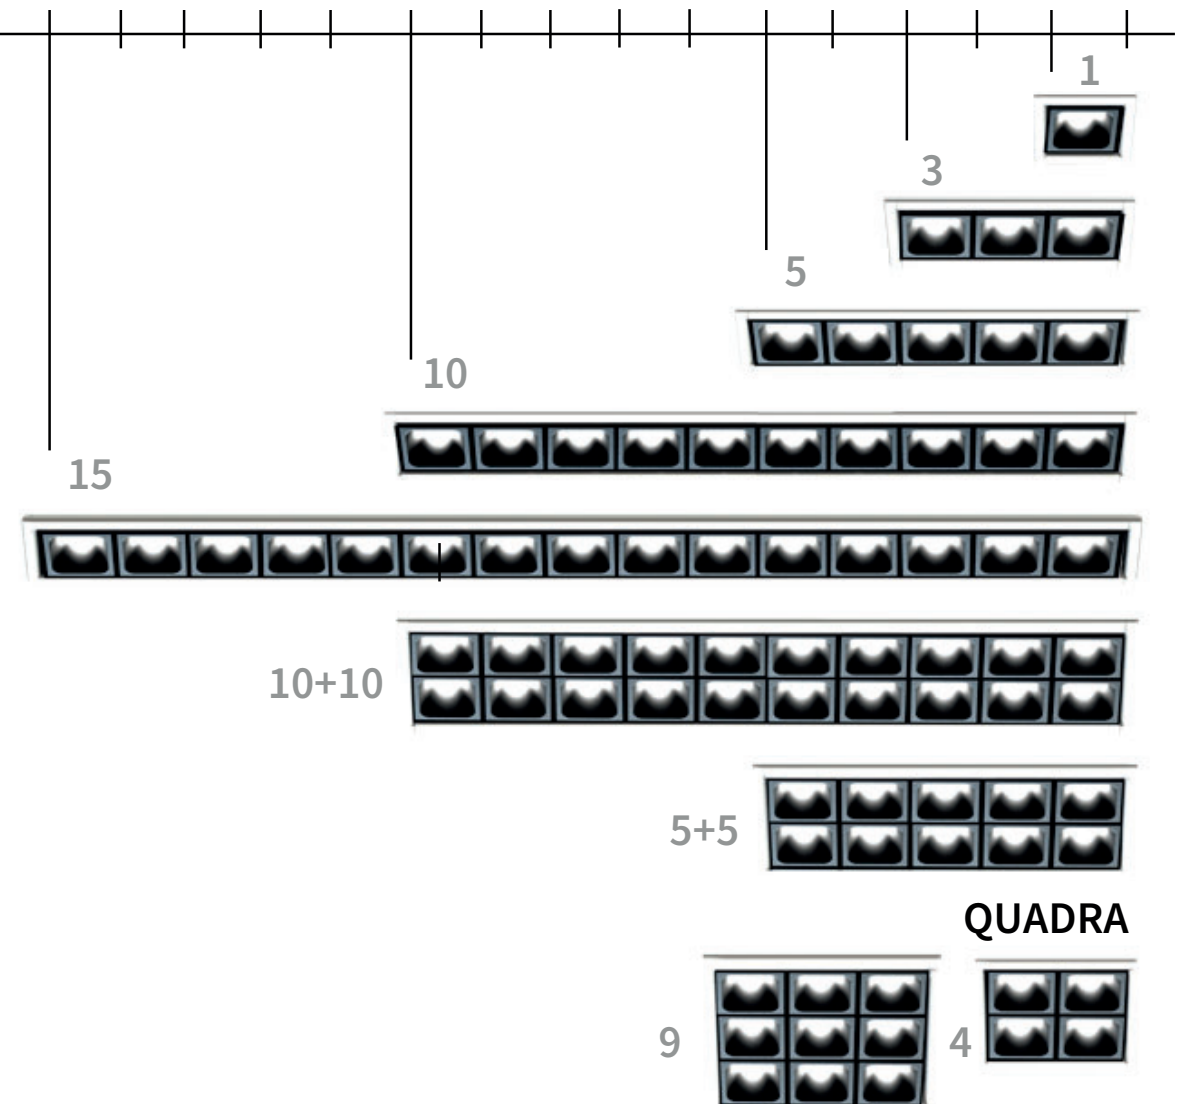


DOWNLIGHT

LEVA INCASSI | DOWNLIGHT

TRIMLESS



OR FRAME




LEVA1 INCASSO DOWNLIGHT

TRIMLESS A+C



CASSA OBBLIGATORIA SENZA CORNICE - COMPULSORY TRIMLESS BOX						
Dim.	H	Kg	CODE			
30x34	62	0,06	LV001A			

FRAME B + C



CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX						
Dim.	H	Kg	CODE	/##		
40x42	62	0,06	LV001F	/ 01 / 02		



KIT LED											Im prod./beam 3000K	700
W	mA	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	CODE			
2,2	700	27x30	60	0,02	200	186	166	175	LV001K.9	●●●/##		

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box


LEVA3 INCASSO DOWNLIGHT

TRIMLESS A+C



CASSA OBBLIGATORIA SENZA CORNICE - COMPULSORY TRIMLESS BOX						
Dim.	H	Kg	CODE			
30x94	62	0,12	LV003A			

FRAME B + C



CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX						
Dim.	H	Kg	CODE	/##		
40x102	65	0,12	LV003F	/ 01 / 02		



KIT LED											Im product/beam 3000K	700
W	mA	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	CODE			
6,6	700	27x90	60	0,06	601	558	496	526	LV003K.9	●●●/##		

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN	● FASCIO / BEAM	/## FINITURA FINISHING
27 2700K	S Spot	/ 01 bianco white
30 3000K	F Flood	/ 02 nero black
35 3500K	W Wide	/ 04 oro gold
40 4000K	Z Asymmetric	
TW Tunable White		

COMPOSIZIONE CODICE: xxx.x ●● /##

HOW TO CREATE THE CODE: F1000.827S /01

CODE

F1000.8 | ●● | /## finishing

base code kelvin beam

700 DRIVERS VEDI | SEE P.452


LEVA5 INCASSO DOWNLIGHT

TRIMLESS A+C



CASSA OBBLIGATORIA SENZA CORNICE - COMPULSORY TRIMLESS BOX				
Dim.	H	Kg	CODE	##
30x154	62	0,15	LV005A	

FRAME B + C



CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX				
Dim.	H	Kg	CODE	##
40x162	65	0,15	LV005F	/ 01 / 02



KIT LED											Im product/beam 3000K	700
W	mA	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	CODE			
11	700	27x150	60	0,10	1002	931	828	877	LV005K.9	●●●/##		

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box


LEVA10 INCASSO DOWNLIGHT

TRIMLESS A+C



CASSA OBBLIGATORIA SENZA CORNICE - COMPULSORY TRIMLESS BOX				
Dim.	H	Kg	CODE	##
30x304	62	0,27	LV010A	

FRAME B + C



CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX				
Dim.	Hmm	Kg	CODE	##
40x312	60	0,35	LV010F	/ 01 / 02



KIT LED											Im product/beam 3000K	700
W	mA	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	CODE			
22	700	27x300	60	0,20	2004	1862	1656	1754	LV010K.9	●●●/##		

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

LEVA 15 INCASSO

TRIMLESS A+C



CASSA OBBLIGATORIA SENZA CORNICE - COMPULSORY TRIMLESS BOX				
Dim.	H	Kg	CODE	##
33x456	62	0,35	LV015A / 01	

FRAME B + C



CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX				
Dim.	Hmm	Kg	CODE	##
40x462	60	0,35	LV015F	/ 01 / 02




KIT LED											Im product/beam 3000K	700
W	mA	Dim.	H	Kg	20°	32°	50°	41°x18°	CODE			
33	700	27x450	60	0,35	3000	2793	2484	2631	LV015K.9	●●●/##		

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA PER MURATURA E CALCESTRUZZO | WALLBOX FOR BRICKWALL OR CONCRETE



LEVA	CODE
LEVA 3 INCASSO	CCLV03
LEVA 5 INCASSO	CCLV05
LEVA 10 INCASSO	CCLV10
LEVA 15 INCASSO	CCLV15

VEDI "CASSAFORME PER MURATURA E CALCESTRUZZO" | WALLBOX FOR BRICK WALL AND CONCRETE" a pagina 119

LEVA 5+5 INCASSO | DOWNLIGHT

TRIMLESS A+C

A CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX

Dim.	H	CODE
79x156	75	LV205A

FRAME B + C

B CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX

Dim.	Hmm	CODE	Col.
88.5x165	min.120	LV205F	/01 /02

C

KIT LED		Dim.	Hmm	Im prod./beam 3000K			CODE
W	mA	75x150	70	20°	32°	50°	LV205K.9 ●●/##
22	700			2004	1862	1656	

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

LEVA 10+10 INCASSO | DOWNLIGHT

TRIMLESS A+C

A CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX

Dim.	H	CODE
79x306	75	LV210A / 01

FRAME B + C

B CASSA OBBLIGATORIA CON CORNICE - COMPULSORY FRAME BOX

Dim.	Hmm	CODE	Col.
89x315	min.120	LV210F	/01 /02

C

KIT LED		Dim.	Hmm	Im prod./beam 3000K			CODE
W	mA	75x300	120	20°	32°	50°	LV210K.9 ●●/##
44	700			4008	3724	3312	

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White

- **FASCIO / BEAM**
- S Spot
- F Flood
- W Wide
- Z Asymmetric


- /## **FINITURA** | FINISHING
- /01 bianco | white
 - /02 nero | black
 - /04 oro | gold

COMPOSIZIONE CODICE: xxx.x ●● /##
 HOW TO CREATE THE CODE: **F1000.827S/01**
 CODE

F1000.8 | ●● | /## finishing
 base code kelvin beam

Per i gradi vedere in tabella -
 For degrees check the table

700 DRIVERS VEDI | SEE P.452

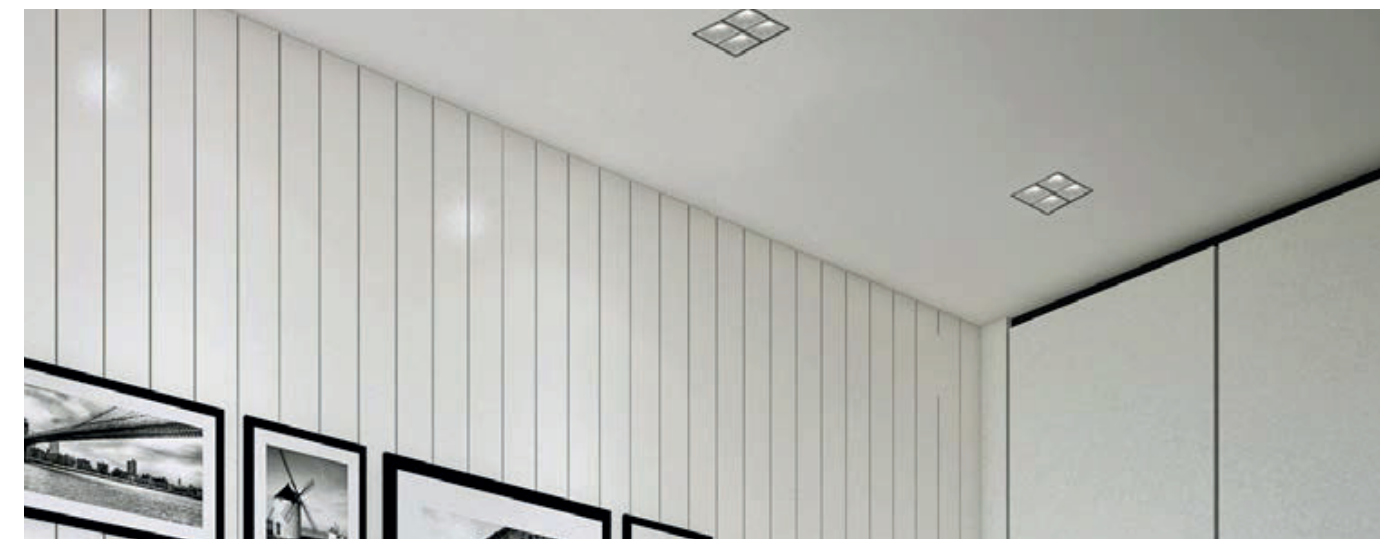

LEVA QUADRA TRIMLESS OR FRAME

LEVA QUADRA 4 INCASSO | DOWNLIGHT

TRIMLESS A+C

A CASSA OBBLIGATORIA - COMPULSORY BOX

Dim.	H	Kg	CODE
64x64	34	0,07	LV301M

FRAME B + C

B CASSA OBBLIGATORIA - COMPULSORY BOX

Dim.	H	Kg	CODE	/##
73x73	60	0,15	LV301F	/01 /02

C

KIT LED		Dim.	H	Kg	Im product/beam 3000K			CODE
W	mA	61x61	33	0,2	S20°	F32°	W50°	LV351K.9 ●●/##
8,8	700				800	745	662	

Accessori - accessories: LV301M: Q4 cassa minimal - Q4 box minimal
 Da completare con alimentatore remoto | To be completed with remote driver

LEVA QUADRA 9 INCASSO | DOWNLIGHT

TRIMLESS A+C

A CASSA OBBLIGATORIA - COMPULSORY BOX

Dim.	H	Kg	CODE
94x94	34	0,12	LV302M

FRAME B + C

B CASSA OBBLIGATORIA - COMPULSORY BOX

Dim.	H	Kg	CODE	/##
103x103	60	0,25	LV302F	/01 /02

C



KIT LED		Dim.	H	Kg	Im product/beam 3000K			CODE
W	mA	91x91	33	0,35	S20°	F32°	W50°	LV352K.9 ●●/##
19,8	700				1800	1676	1490	

Accessori - accessories: LV302M: Q9 cassa minimal - Q9 box minimal
 Da completare con alimentatore remoto | To be completed with remote driver

LEVA INCASSI MINIMAL BASCULANTE


CASSE IDONEE SIA DA CARTONGESSO CHE DA CALCESTRUZZO | SUITABLE BOXES FOR BOTH PLASTERBOARD AND CONCRETE

LEVA 3 INCASSO RASATO BASCULANTE TILT VERSION TRIMLESS




CASSA OBBLIGATORIA - COMPULSORY BOX		Dim.		H	Kg	98X118	CODE	Col.
		97x116	123	0,12			LV003B	/01 /02

KIT LED		Dim.		H	Kg	Im prod./beam 3000K		CODE
W	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	
6,6	75x100	110+38	1,23	601	558	496	526	LV041K.9 ●●●/##




LEVA 5 INCASSO RASATO BASCULANTE TILT VERSION TRIMLESS DOWNLIGHTER




CASSA OBBLIGATORIA - COMPULSORY BOX		Dim.		H	Kg	99X178	CODE	Col.
		97x176	123	0,12			LV005B	/01 /02

KIT LED		Dim.		H	Kg	Im prod./beam 3000K		CODE
W	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	
11	75x160	110+38	1,67	1002	931	828	877	LV042K.9 ●●●/##




LEVA 10 INCASSO RASATO BASCULANTE TILT VERSION TRIMLESS DOWNLIGHTER




CASSA OBBLIGATORIA - COMPULSORY BOX		Dim.		H	Kg	99X328	CODE	Col.
		97x326	123	0,26			LV010B	/01 /02

KIT LED		Dim.		H	Kg	Im prod./beam 3000K		CODE
W	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	
22	75x310	110+38	2,26	2004	1862	1656	1754	LV043K.9 ●●●/##




LEVA 15 INCASSO RASATO BASCULANTE TILT VERSION TRIMLESS DOWNLIGHTER




CASSA OBBLIGATORIA - COMPULSORY BOX		Dim.		H	Kg	99X478	CODE	Col.
		97x476	123	0,26			LV015B	/01 /02

KIT LED		Dim.		H	Kg	Im prod./beam 3000K		CODE
W	Dim.	H	Kg	S20°	F32°	W50°	Z41°x18°	
33	75x460	110+38	3,06	3006	2793	2484	2631	LV044K.9 ●●●/##

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

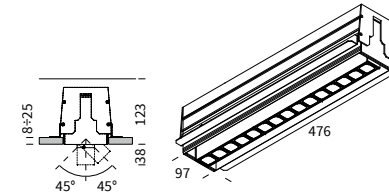


LEVA 5 INCASSO RASATO ROTOTRASLANTE SOFT ROTATE & SLIDE MECHANISM TRIMLESS DOWNLIGHTER



CASSA OBBLIGATORIA - COMPULSORY BOX		Dim.		H	Kg	85X233	CODE	Col.
		97x250	123	0,12			LV005C	/01 /02



KIT LED		Dim.		H	Kg	Im prod./beam 3000K		CODE
W	mA	Dim.	H	S20°	F32°	W50°	Z41°x18°	
11	700	80x231	140	1000	931	828		LV051K.9 ●●●/##

Da completare con cassa e alimentatore da installare remoto in scatola di derivazione | To be completed with box and power supply to be installed in a remote junction box

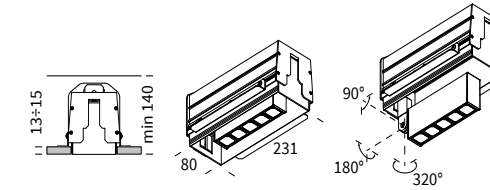

ACCESSORI / ACCESSORIES

KIT LUCE INTERNA PER ILLUMINARE LA CASSA INTERNAL LIGHT KIT



linea di luce - LED line		Im prod		CODE
W	7,5	924		LVKIT5

VERSIONI DISPONIBILI / AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White

- **FASCIO / BEAM**
- S Spot
- F Flood
- W Wide
- Z Asymmetric

/## FINITURA CASSA | BOX FINISHING

- /01 bianco | white
- /02 nero | black

/## FINITURA KIT LED | KIT LED FINISHING


- /01 telaio bianco, ottica nera | white frame, black optic
- /02 telaio nero, ottica nera | black frame, black optic
- /41 telaio bianco, ottica bianca | white frame, white optic
- /42 telaio nero, ottica oro | black frame, gold optic

○ **KELVIN**

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K


Per i gradi vedere in tabella -
For degrees check the table

CASSAFORME PER MURATURA E CALCESTRUZZO
WALLBOX FOR BRICK WALL AND CONCRETE

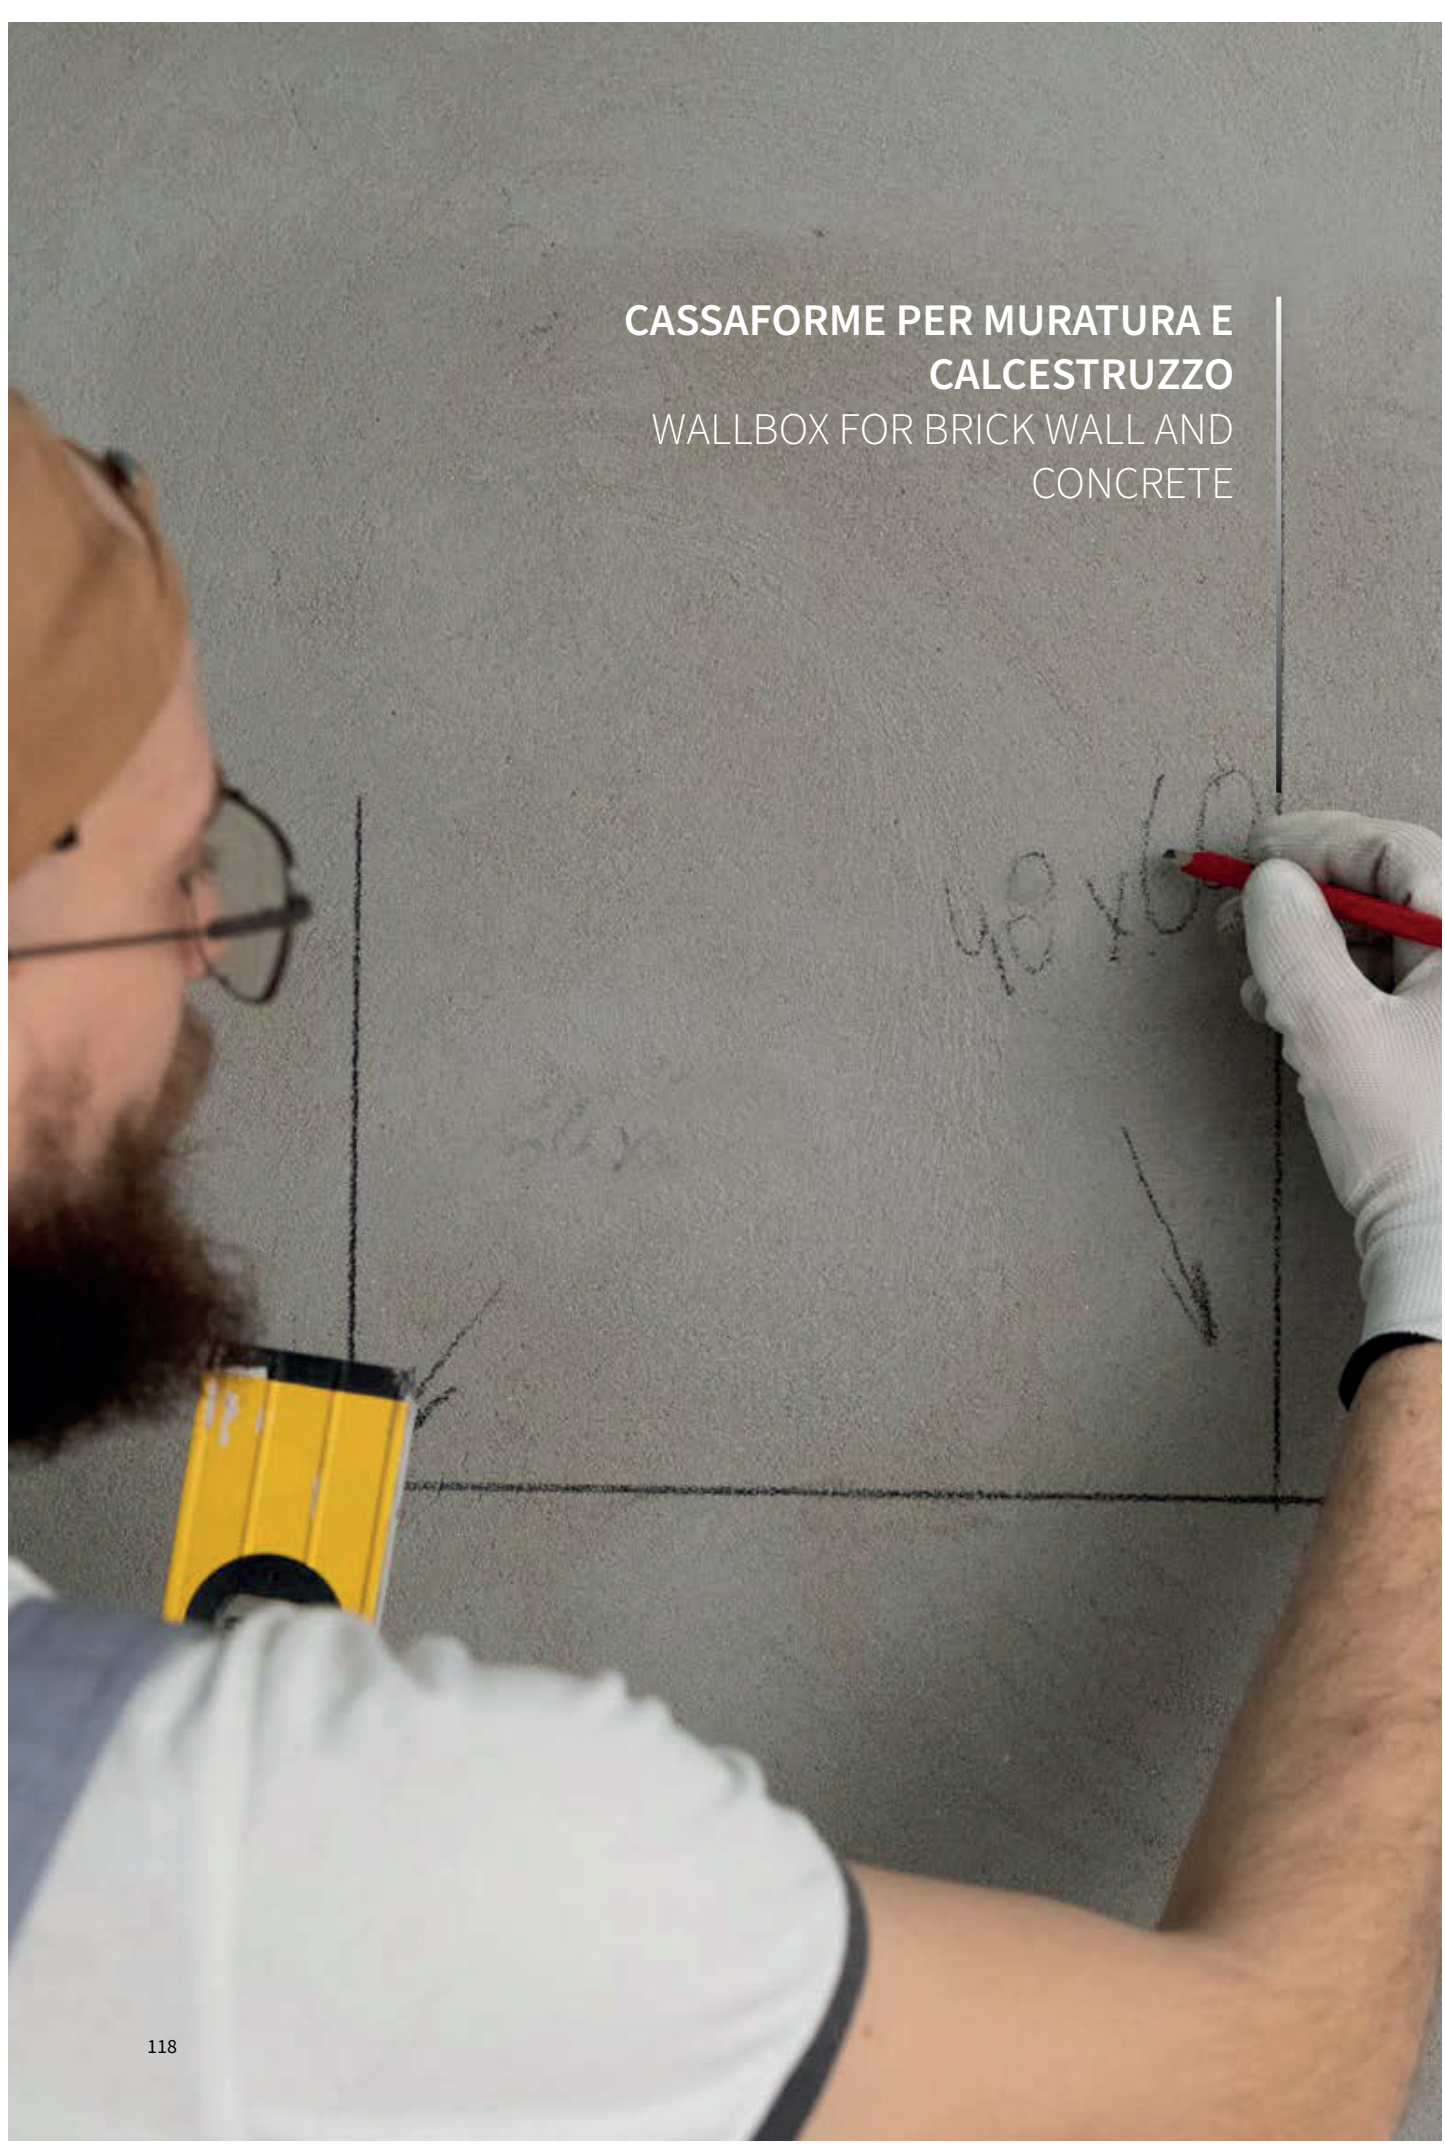

ACCESSORI OPTIONAL/ OPTIONAL ACCESSORIES
CASSAFORME PER MURATURA E CALCESTRUZZO | WALLBOX FOR BRICK WALL AND CONCRETE



CASSAFORMA PER LEVA3 | WALLBOX FOR LEVA3



	L. mm int.	L.mm ext.	WxH
LEVA 3	97	99,4	48,4 X 93,8

CODE
CCLV03



CASSAFORMA PER LEVA5 | WALLBOX FOR LEVA5



	L. mm int.	L.mm ext.	WxH
LEVA 5	157	159,4	48,4 X 93,8

CODE
CCLV05


CASSAFORMA PER LEVA10 | WALLBOX FOR LEVA10



	L. mm int.	L.mm ext.	WxH
LEVA 10	307	309,4	48,4 X 93,8

CODE
CCLV10

CASSAFORMA PER LEVA15 | WALLBOX FOR LEVA15



	L. mm int.	L.mm ext.	WxH
LEVA 15	457	459,4	48,4 X 93,8

CODE
CCLV15




MINISIGHT

MINISIGHT

MINIMAL



FRAME

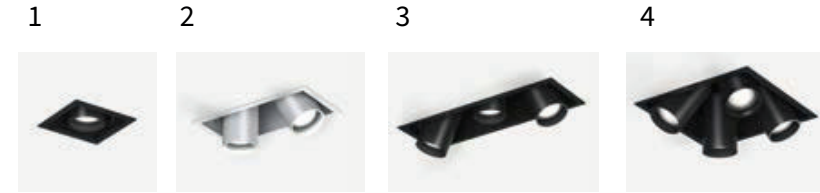

Proiettore da incasso, per installazioni trimless o con battuta, dotato di gruppo ottico telescopico estraibile e orientabile, per sorgenti LED integrate o lampade LED GU10 230V / 240V, con corpo e monocolo telescopico in metallo verniciato. La versione trimless necessita obbligatoriamente di controtelaio per installazione su controsoffitti in cartongesso da 13mm. Per gli articoli a sorgenti led integrate alimentazione elettronica in remoto disponibile come accessorio. Installabile anche in pareti e soffitti in calcestruzzo mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20 / IP23.

Recessed projector, for trimless or trimmed installations, equipped with extractable and adjustable telescopic optical unit, for integrated LED sources or GU10 LED light bulbs 230V / 240V, with telescopic body and monocolo in painted metal. The trimless version necessarily requires a counterframe for installation on 13mm plasterboard ceilings. For articles with integrated LED sources, remote electronic power supply available as accessory. Extruded aluminum formwork for concrete recessed installation available as an accessory. IP20 / IP23.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO / BEAM

S		SPOT 15°
F		FLOOD 27°
W		WIDE 46°


FINITURE STANDARD / STANDARD FINISHINGS


/01		BIANCO / WHITE
/02		NERO / BLACK

FINITURE PREMIUM / PREMIUM FINISHINGS

/81		ORO ROSA / ROSE GOLD
/82		BRONZO ANTICATO / ANTIQUE BRONZE
/83		OTTONE SATINATO / BRUSHED BRASS


CURVE FOTOMETRICHE / PHOTOMETRIC DATA

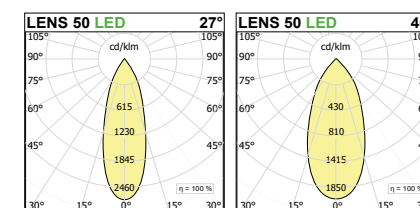

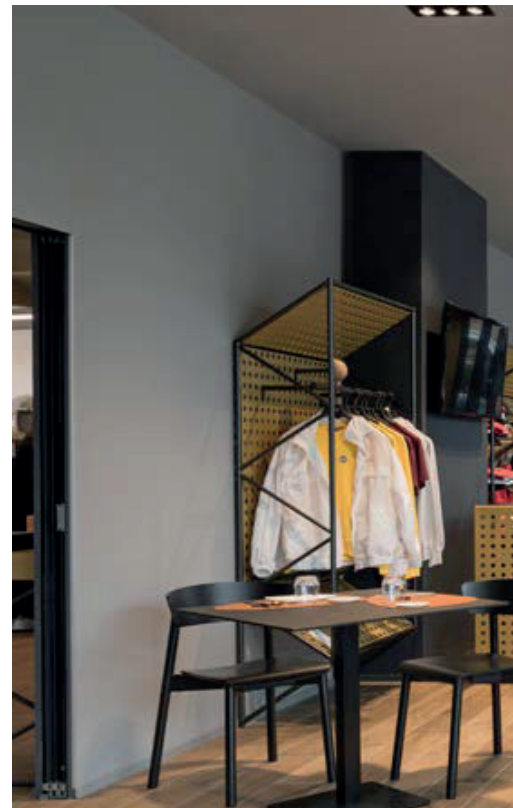


MINI SIGHT MINIMAL


MINI SIGHT 1M MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

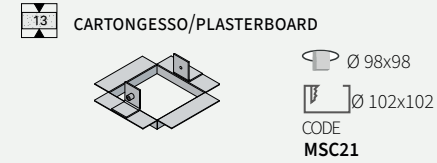

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

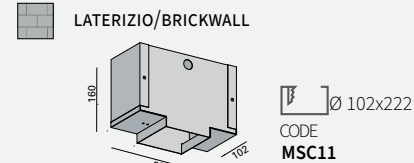


Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP


LED										
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE
12	350	96x96	55	135	45	0,66	1285	1285	1289	MS50.9 ●● / ##
18	500	96x96	55	135	45	0,66	1575	1575	1579	

GU10 LED 230V										
W	Dim.	Ø	H	α	Kg	CODE				
1x max 50	96x96	55	135	45	0,55	MS52 / ##				


MINI SIGHT 2M MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

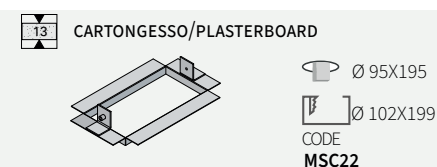

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

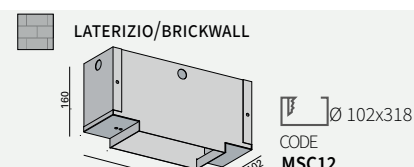


Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP


LED										
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE
24	350	96x193	55	135	45	1,05	2570	2570	2578	MS60.9 ●● / ##
36	500	96x193	55	135	45	1,05	3150	3150	3158	

GU10 LED										
W	Dim.	Ø	H	α	Kg	CODE				
2x max 50	96x193	55	135	45	1,00	MS62 / ##				


MINI SIGHT 3M MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

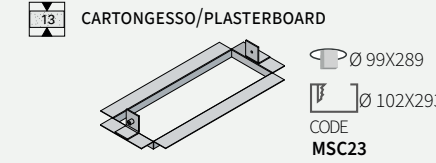

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

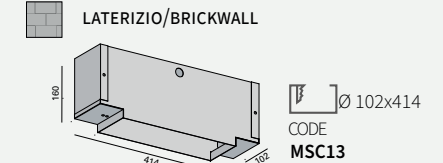


Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP


LED										
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE
36	350	96x288	55	135	45	1,50	3855	3855	3867	MS70.9
54	500	96x288	55	135	45	1,50	4725	4725	4737	

GU10 LED 230V										
W	Dim.	Ø	H	α	Kg	CODE				
3x 50	96x288	55	135	45	1,25	MS72 / ##				

MINI SIGHT 4M MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE / CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

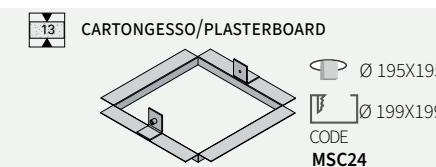

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings



Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 SCEGLIERE IL GRUPPO OTTICO / CHOOSE OPTIC GROUP

LED										
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE
48	350	193x193	55	135	45	1,85	5140	5140	5156	MS80.9
72	500	193x193	55	135	45	1,85	6300	6300	6316	

GU10 LED 230V										
W	Dim.	Ø	H	α	Kg	CODE				
4x 50	193x193	55	135	45	1,41	MS82				

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

TW Tunable White Dali

Note: Gli apparecchi con temperatura di colore variabile (Tunable White) vengono forniti comprensivi di alimentatore DALI | The devices with variable color temperature (Tunable White) are supplied with integrated DALI power supply.

● FASCIO / BEAM

- S Spot
- F Flood
- W Wide

/ ## FINITURA | FINISHING


- / 01 bianco | white
- / 02 nero | black

/ ## FINITURA PREMIUM | PREMIUM FINISHING

- / 81 oro rosa | rose gold
- / 82 bronzo anticato | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: **F1000.827S / 01**



TW 350 500 DRIVERS VEDI | SEE P.452


ACCESSORI / ACCESSORIES

LENTI 50 / LENSES 50

	Ø	Kg	CODE
LENTE SATINATA / SATINED LENS	50	0,01	L050S / ##
LENTE ELISSOIDALE / ELIPSOID LENS	50	0,01	L050E / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	50	0,01	L050A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	50	0,01	L050R / ##

MINI SIGHT FRAME

MINI SIGHT 1 FRAME




102X102											
LED											
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE	
12	350	110x110	55	135	45	0,60	1285	1285	1289	MS10.9	●● / ##
18	500	110x110	55	135	45	0,60	1575	1575	1579		

GU10 LED 230V											
W	Dim.	Ø	H	α	Kg	CODE					
1x max 50	110x110	55	135	45	0,62	MS12 / ##					

Accessori - accessories: MSC01: cassaforma mini sight 1 - wallbox mini sight 1

MINI SIGHT 2 FRAME




194X102											
LED											
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE	
24	350	110x207	55	135	45	1,00	2570	2570	2578	MS20.9	●● / ##
36	500	110x207	55	135	45	1,00	3150	3150	3158		

GU10 LED 230V											
W	Dim.	Ø	H	α	Kg	CODE					
2x50	110x207	55	135	45	0,93	MS22 / ##					

Accessori - accessories: MSC02: cassaforma mini sight 2 - Wallbox mini sight 2

MINI SIGHT 3 FRAME




102X102											
LED											
W	mA	Dim.	H	α	Kg	S15°	F27°	W46°	CODE		
36	350	110x302	135	45	1,50	3855	3855	3867		MS30.9	●● / ##
54	500	110x302	135	45	1,50	4725	4725	4737			

GU10 LED 230V											
W	Dim.	H	α	Kg	CODE						
3x max 50	110x302	135	45	1,44	MS32 / ##						

Accessori - accessories: MSC03: cassaforma mini sight 3 - Wallbox mini sight 3

MINI SIGHT 4 FRAME



198X192											
LED											
W	mA	Dim.	Ø	H	α	Kg	S15°	F27°	W46°	CODE	
48	350	207x207	55	135	45	5140	5140	5156		MS40.9	●● / ##
72	500	207x207	55	135	45	6300	6300	6316			

GU10 LED 30V											
W	Dim.	Ø	H	α	CODE						
4x max 50	207x207	55	135	45	MS42 / ##						

Accessori - accessories: MSC04: cassaforma mini sight 4 - Wallbox mini sight 4

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN**
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
- FASCIO / BEAM**
 - S Spot
 - F Flood
 - W Wide
- TW** Tunable White Dali

Note: Gli apparecchi con temperatura di colore variabile (Tunable White) vengono forniti comprensivi di alimentatore DALI | The devices with variable color temperature (Tunable White) are supplied with integrated DALI power supply.

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: **F1000.827S / 01**

CODE	base code	kelvin	beam	finishing
F1000.8				

FINITURA PREMIUM / PREMIUM FINISHING

- / 01 bianco | white
- / 02 nero | black
- / 81 oro rosa / rose gold
- / 82 bronzo anticato | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

DRIVERS VEDI | SEE P.452




DOWNLIGHT


ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA MINI SIGHT FRAME WALLBOX MINI SIGHT FRAME

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

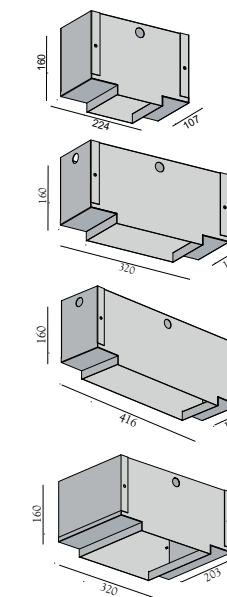

	Dim.	H	CODE
MINI SIGHT1	107x224	160	MSC01
MINI SIGHT2	107x320	160	MSC02
MINI SIGHT3	107x416	160	MSC03
MINI SIGHT4	203x320	160	MSC04

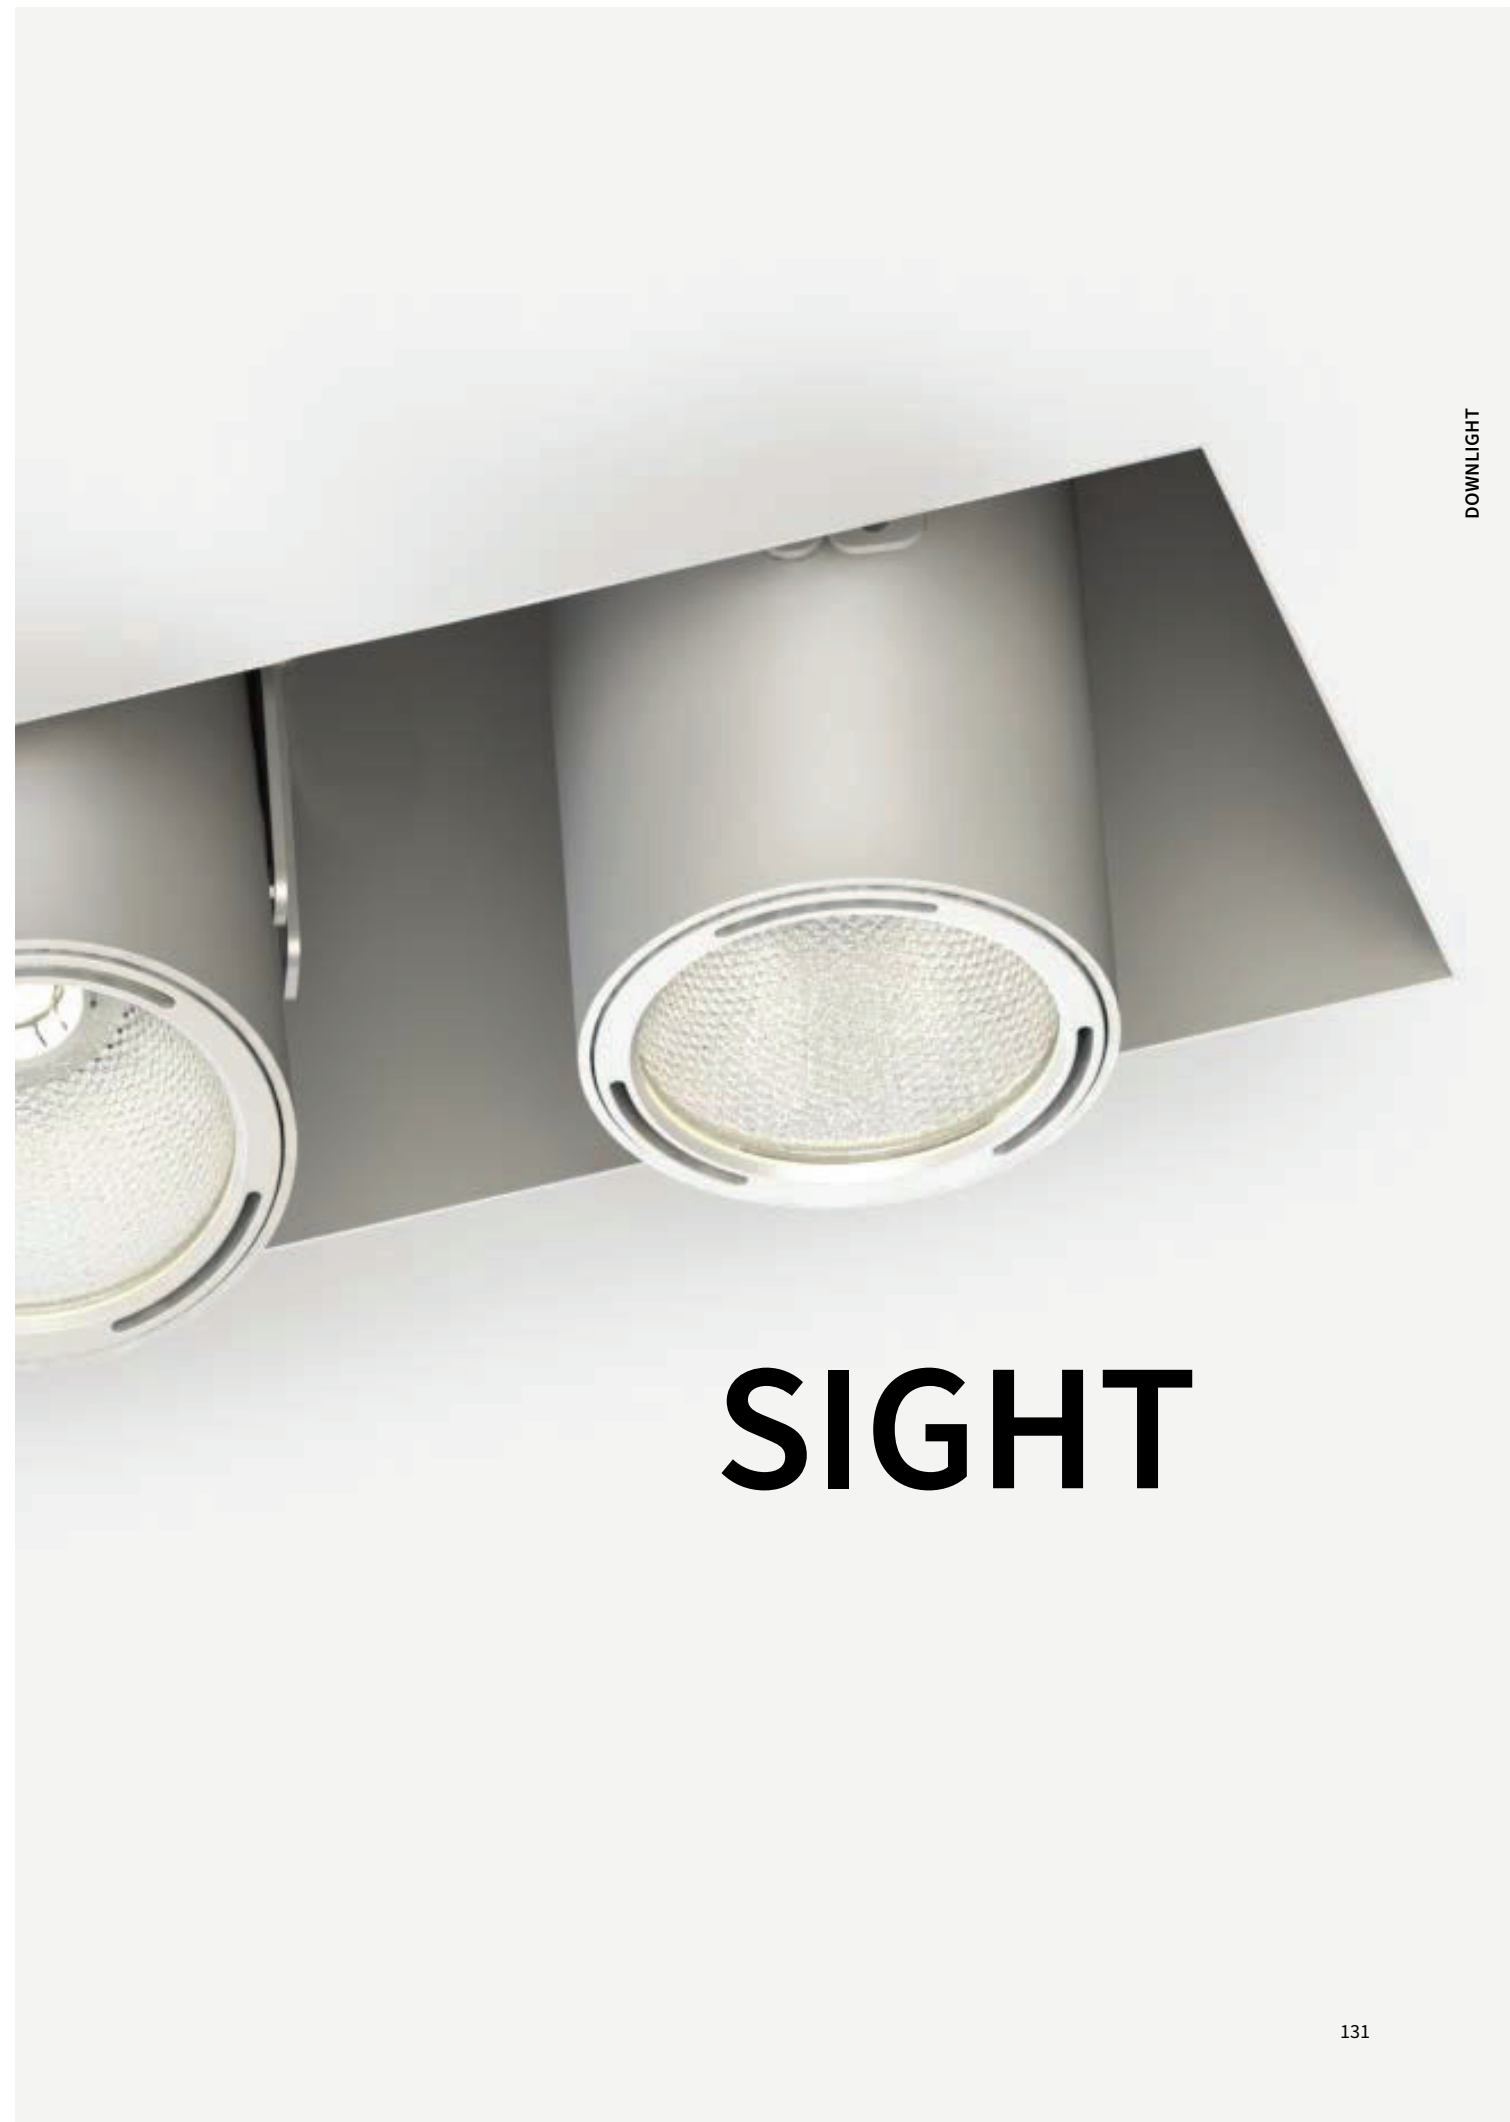

SIGHT

SIGHT

MINIMAL



FRAME



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY












ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO con telaio accessorio SUITABLE FOR PLASTERBOARD with its accessories.


DOWNLIGHT

KELVIN	FASCIO / BEAM	FINITURE STANDARD / STANDARD FINISHINGS
27  2700°K	S  SPOT 15°	/ 01  BIANCO / WHITE
30  3000°K	F  FLOOD 24°	/ 02  NERO / BLACK
35  3500°K	W  WIDE 38°	
40  4000°K		

Collezione di proiettori da incasso orientabili trimless o con battuta, con sorgente COB LED. Struttura in acciaio verniciato quadrata o rettangolare ad una o più sorgenti. Gruppo ottico telescopico estraibile e orientabile. La versione trimless necessita obbligatoriamente di controtelaio per installazione su controsoffitti in cartongesso da 13mm. Equipaggiati con LED ad alta resa, CRI >90, dissipatore passivo ad alte prestazioni in alluminio estruso anodizzato nero e riflettore metallizzato in alluminio 99,99%. Da associare a driver remoti stabilizzati in corrente. Equipaggiabile, all'occorrenza, con spettri per orticoltura. Installabile anche in pareti e soffitti in calcestruzzo mediante apposita cassaforma in lamiera zincata disponibile come accessorio Grado di protezione IP20 / IP23. zincata disponibile come accessorio. Grado di protezione IP20 / IP23.

Family of trimless or trimmed adjustable recessed spotlights, with COB LED source. Square or rectangular painted steel structure with one or more light sources. Removable and adjustable telescopic optical unit. The trimless version necessarily requires a counterframe for installation on 13mm plasterboard ceilings. Equipped with high-performance LEDs, CRI > 90, high-performance passive heat sink in black anodized extruded aluminum and metallized reflector in 99.99% aluminum. To be associated with remote drivers. They might be realized, if necessary, with spectra for horticulture. Extruded aluminum formwork for concrete recessed installation available as an accessory. IP20 / IP23.



CURVE FOTOMETRICHE / PHOTOMETRIC DATA

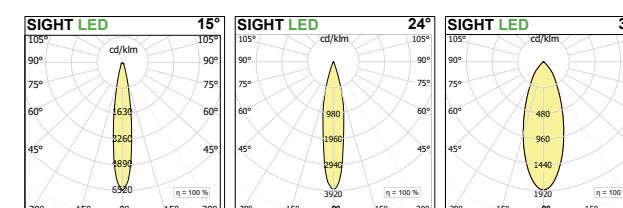

SIGHT MINIMAL


vedi accessori

SIGHT MINIMAL 1M




LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
17	500	159x154	177	1930	1827	1905			LT4301M.9 ●● / ##
24,3	700	159x154	177	2468	2356	2430			

Accessori - accessories: OBBLIGATORIO TEIN01M: telaio Incas 1AM - MANDATORY frame Incas 1AM
L085#A: Anello ø85 con lente - lens with ring ø85




500 700

SIGHT MINIMAL 2M




LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
2x17	500	159x332	177	3860	3654	3810			LT4304M.9 ●●● / ##
2x24,3	700	159x332	177	4936	4712	4860			

Accessori - accessories: OBBLIGATORIO TEIN02M: Telaio Incas 2AM - MANDATORY Frame Incas 2AM
OPTIONAL L085#A: Anello ø85 con lente - lens with ring ø85



500 700

SIGHT MINIMAL 3M



LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
3x17	500	159x460	177	5790	5481	5715			LT4309M.9 ●●● / ##
3x24,3	700	159x460	177	7404	7068	7290			


Accessori - accessories: OBBLIGATORIO TEIN03M: Telaio incas 3AM - MANDATORY Frame Incas 3AM
OPTIONAL L085#A: Anello ø85 con lente - lens with ring ø85



500 700

SIGHT FRAME

SIGHT FRAME 1F




LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
17	500	178x178	177	1930	1827	1905			LT4301.9 ●●● / ##
24,3	700	178x178	177	2468	2356	2430			

Accessori - accessories: OPTIONAL L085#A: Anello ø85 con lente - lens with ring ø85



500 700

SIGHT FRAME 2F




LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
2x17	500	178x332	177	3860	3654	3810			LT4304.9 ●●● / ##
2x24,3	700	178x332	177	4936	4712	4860			

Accessori - accessories: OPTIONAL L085#A: Anello ø85 con lente - lens with ring ø85



500 700

SIGHT FRAME 3F



LED		Dim.		H		Im product/beam 3000K		CODE	
W	mA					S15°	F24°	W38°	
3x17	500	178x460	177	5790	5481	5715			LT4309.9 ●●● / ##
3x24,3	700	178x460	177	7404	7068	7290			

Accessori - accessories: OPTIONAL L085#A: Anello ø85 con lente - lens with ring ø85




500 700

ACCESSORIO OBBLIGATORIO / MANDATORY ACCESSORIES

TELAIO SIGHT MINIMAL ISPEZIONABILE PER CARTONGESSO/PLASTERBOARD INSPECTABLE FRAME FOR SIGHT MINIMAL

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm. Per cartongessi da 13mm spessorare - Inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings



		CODE
SIGHT MINIMAL 1M	162X163	TEIN01M
SIGHT MINIMAL 2M	316x163	TEIN02M
SIGHT MINIMAL 3M	470x163	TEIN03M

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES



	ø	Kg	CODE
LENTE SATINATA / SATINED LENS	85	0,01	L085S.A / ##
LENTE ELISSOIDALE / ELIPSOID LENS	85	0,01	L085E.A / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	85	0,01	L085A.A / ##
FILTRO NIDO DAPE / HONEY COMB LOUVER	85	0,01	L085R.A / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

● FASCIO / BEAM

- S Spot 15°
- F Flood 24°
- W Wide 38°

/## FINITURA | FINISHING

- /01 bianco | white
- /02 nero | black

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ●● / ## — finishing
| | |
base code kelvin beam

500 700 DRIVERS VEDI | SEE P.452



MINI INCAS

MINI INCAS

MINIMAL



FRAME



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL




GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.



SORGENTE LED GU10 / GU10 LIGHT SOURCE

FINITURE STANDARD / STANDARD FINISHINGS

- / 01 BIANCO / WHITE
- / 02 NERO / BLACK

FINITURE PREMIUM / PREMIUM FINISHINGS

- / 81 ORO ROSA | ROSE GOLD
- / 82 BRONZO ANTICATO / ANTIQUE BRONZE
- / 83 OTTONE BRUNITO SPAZZOLATO | BRUSHED BURNISHED BRASS

Proiettore da incasso, per installazioni trimless o con battuta, dotato di monocolo telescopico estraibile e orientabile, per sorgente LED GU10 230V / 240V, con corpo e monocolo telescopico in metallo verniciato.

La versione trimless necessita obbligatoriamente di controtelaio per installazione su controsoffitti in cartongesso da 13mm. Installabile anche in pareti e soffitti in calcestruzzo mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20 / IP23

Recessed projector, for trimless or trimmed installations, equipped with removable and adjustable telescopic monocle, for GU10 LED source 230V / 240V, with body and telescopic monocle in painted metal.

The trimless version necessarily requires counterframe for installation on 13mm plasterboard false ceilings. Extruded aluminum formwork for concrete recessed installation available as an accessory. IP20 / IP23.

MONOCOLO TELESCOPICO ESTRAIBILE E ORIENTABILE




REMOVABLE AND ADJUSTABLE TELESCOPIC MONOCLE




MINI INCAS MINIMAL


MINI INCAS 1 MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

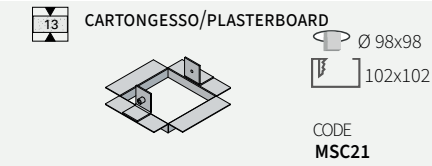

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

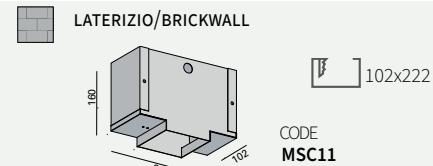


Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 GRUPPO OTTICO / OPTIC GROUP


GU10 LED	W	Dim.	Ø	H	α	Kg	CODE
2x max 50	96x96	55	135	45	0,55	LT1202 / ##	




MINI INCAS 2 MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

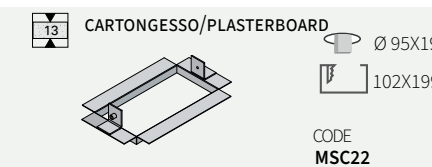

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

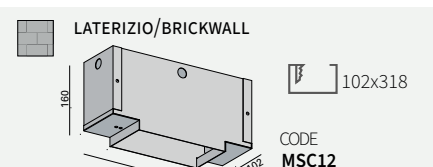

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

2 GRUPPO OTTICO / OPTIC GROUP


GU10 LED	W	Dim.	Ø	H	α	Kg	CODE
2x max 50	96x193	55	135	45	1,00	LT1208 / ##	




MINI SIGHT 3M MINIMAL



1 SCEGLIERE IL TELAIO O LA CASSA IN BASE AL TIPO DI INSTALLAZIONE CHOOSE CASE OR FRAME ACCORDING TO THE TYPE OF INSTALLATION

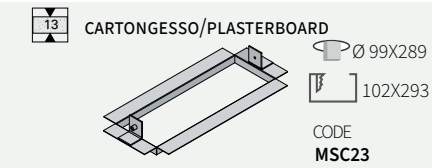

Telaio ispezionabile da fissare e stuccare nel cartongesso da 15mm, per cartongessi da 13mm spessorare inspectable frame to be fixed and plastered in 15mm height plasterboard false ceilings

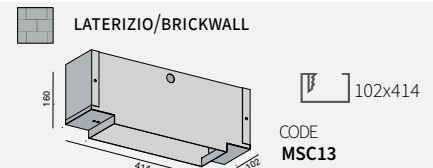

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete


2 GRUPPO OTTICO / OPTIC GROUP

GU10 LED 230V	W	Dim.	Ø	H	α	Kg	CODE
3x50	96x288	55	135	45	1,25	LT1216 / ##	



MINI INCAS FRAME


MINI INCAS 1 FRAME



GU10 LED	W	Dim.	H	Kg	CODE
1x max 50	110x110	135	0,55	LT1205 / ##	




MINI INCAS 2 FRAME



GU10 LED	W	Dim.	H	Kg	CODE
2x max 50	110x206	135	1,00	LT1212 / ##	



MINI INCAS 3 FRAME




GU10 LED	W	Dim.	H	Kg	CODE
3x max 50	110x332	135	1,25	LT1220 / ##	




ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES


CASSAFORMA PER LATERIZIO O CALCESTRUZZO MINI INCAS FRAME WALLBOX MINI INCAS FRAME FOR INSTALLING IN BRICK OR REINFORCED CONCRETE



MINI INCAS 1 FRAME	Dim.	H	CODE
	107x224	160	MSC01



MINI INCAS 2 FRAME	Dim.	H	CODE
	107x320	160	MSC02



MINI INCAS 3 FRAME	Dim.	H	CODE
	107x416	160	MSC03

VERSIONI DISPONIBILI / AVAILABLE VERSION

/ ## FINITURA | FINISHING

- / 01 bianco | white
- / 02 nero | black

/ ## FINITURA PREMIUM / PREMIUM FINISHING

- / 81 oro rosa / rose gold
- / 82 bronzo anticato|antique bronze
- / 83 ottone brunito spazzolato|brushed burnished brass

COMPOSIZIONE CODICE: xxx. /

HOW TO CREATE THE CODE: **F1000 / 01**

CODE
F1000.8 / ## finishing
|
base code



INCAS

INCAS

MINIMAL



FRAME



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO con telaio accessorio SUITABLE FOR PLASTERBOARD with its accessories.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO / BEAM

S		SPOT 15°
F		FLOOD 24°
W		WIDE 38°


FINITURE STANDARD / STANDARD FINISHINGS

/ 01		BIANCO / WHITE
/ 02		NERO / BLACK

Famiglia di incassi orientabili, con sorgente COB LED, per incasso trimless o con battuta. Struttura in acciaio verniciato quadrata o rettangolare ad una o più sorgenti. Gruppo ottico cardanico con orientamento $\pm 25^\circ$ sui due assi orizzontali. La versione trimless necessita obbligatoriamente di controtelaio per installazione su controsoffitti in cartongesso da 13mm. Equipaggiati con LED ad alta resa, CRI >90, dissipatore passivo ad alte prestazioni in alluminio estruso anodizzato nero e riflettore metallizzato in alluminio 99,99%. Da associare a driver remoti stabilizzati in corrente. Grado di protezione IP20 / IP23.


Family of trimless or trimmed adjustable recessed spotlights, with COB LED source. Square or rectangular painted steel structure with one or more light sources. Cardanic optical unit with $\pm 25^\circ$ orientation on the two horizontal axes. The trimless version necessarily requires a counterframe for installation on 13mm plasterboard ceilings. Equipped with high-performance LEDs, CRI > 90, high-performance passive heat sink in black anodized extruded aluminum and metallized reflector in 99.99% aluminum. To be associated with remote drivers. IP20 / IP23.

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

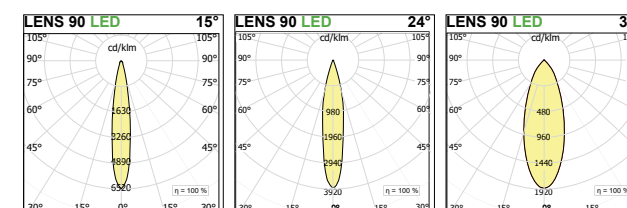



INCAS MINIMAL 1



TELAIO PER CARTONGESSO OBBLIGATORIO - COMPULSORY FRAME FOR PLASTERBOARD


160x163	H	13	CODE	TEIN01M
---------	---	----	------	---------

GRUPPO OTTICO / OPTIC GROUP

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
17	500		154x159	140	1930	1827	1905		IN01M.9 ●● / ##
24,3	700		154x159	140	2468	2356	2430		

Accessori - accessories: TEIN01M: telaio Incas 1AM - frame Incas 1AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD

INCAS MINIMAL 2



TELAIO PER CARTONGESSO OBBLIGATORIO - COMPULSORY FRAME FOR PLASTERBOARD


314x163	H	13	CODE	TEIN02M
---------	---	----	------	---------

GRUPPO OTTICO / OPTIC GROUP

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
2x17	500		308x159	140	3860	3654	3810		IN02M.9 ●● / ##
2x24,3	700		308x159	140	4936	4712	4860		

Accessori - accessories: TEIN02M: telaio Incas 2AM - frame Incas 2AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD

INCAS MINIMAL 3



TELAIO PER CARTONGESSO OBBLIGATORIO - COMPULSORY FRAME FOR PLASTERBOARD

469x163	H	13	CODE	TEIN03M
---------	---	----	------	---------


GRUPPO OTTICO / OPTIC GROUP

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
3x17	500		463x159	140	5790	5481	5715		IN03M.9 ●● / ##
3x24,3	700		463x159	140	7404	7068	7290		

Accessori - accessories: TEIN03M: telaio incas 3AM - frame Incas 3AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD

INCAS FRAME

INCAS 1




162x162 8-30 CRI 90 IP20 5 ENEC

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

500 700

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
17	500		178x178	140	1930	1827	1905		IN01.9 ●● / ##
24,3	700		178x178	140	2468	2356	2430		

INCAS 2




316x162 8-30 CRI 90 IP20 5 ENEC

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

500 700

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
2x17	500		332x178	140	3860	3654	3810		IN02.9 ●● / ##
2x24,3	700		332x178	140	4936	4712	4860		

INCAS 3



470x162 8-30 CRI 90 IP20 5 ENEC

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

500 700

LED	W	mA	Dim.	H	Im product/beam 3000K	S15°	F24°	W38°	CODE
3x17	500		487x178	140	5790	5481	5715		IN03.9 ●● / ##
3x24,3	700		487x178	140	7404	7068	7290		

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

● FASCIO / BEAM

- S Spot 15°
- F Flood 24°
- W Wide 38°

/ ## FINITURA | FINISHING



- /01 bianco | white
- /02 nero | black

COMPOSIZIONE CODICE: xxx.x ●● /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 | ●● | / ## finishing
base code kelvin beam

500 700 DRIVERS VEDI | SEE P.452

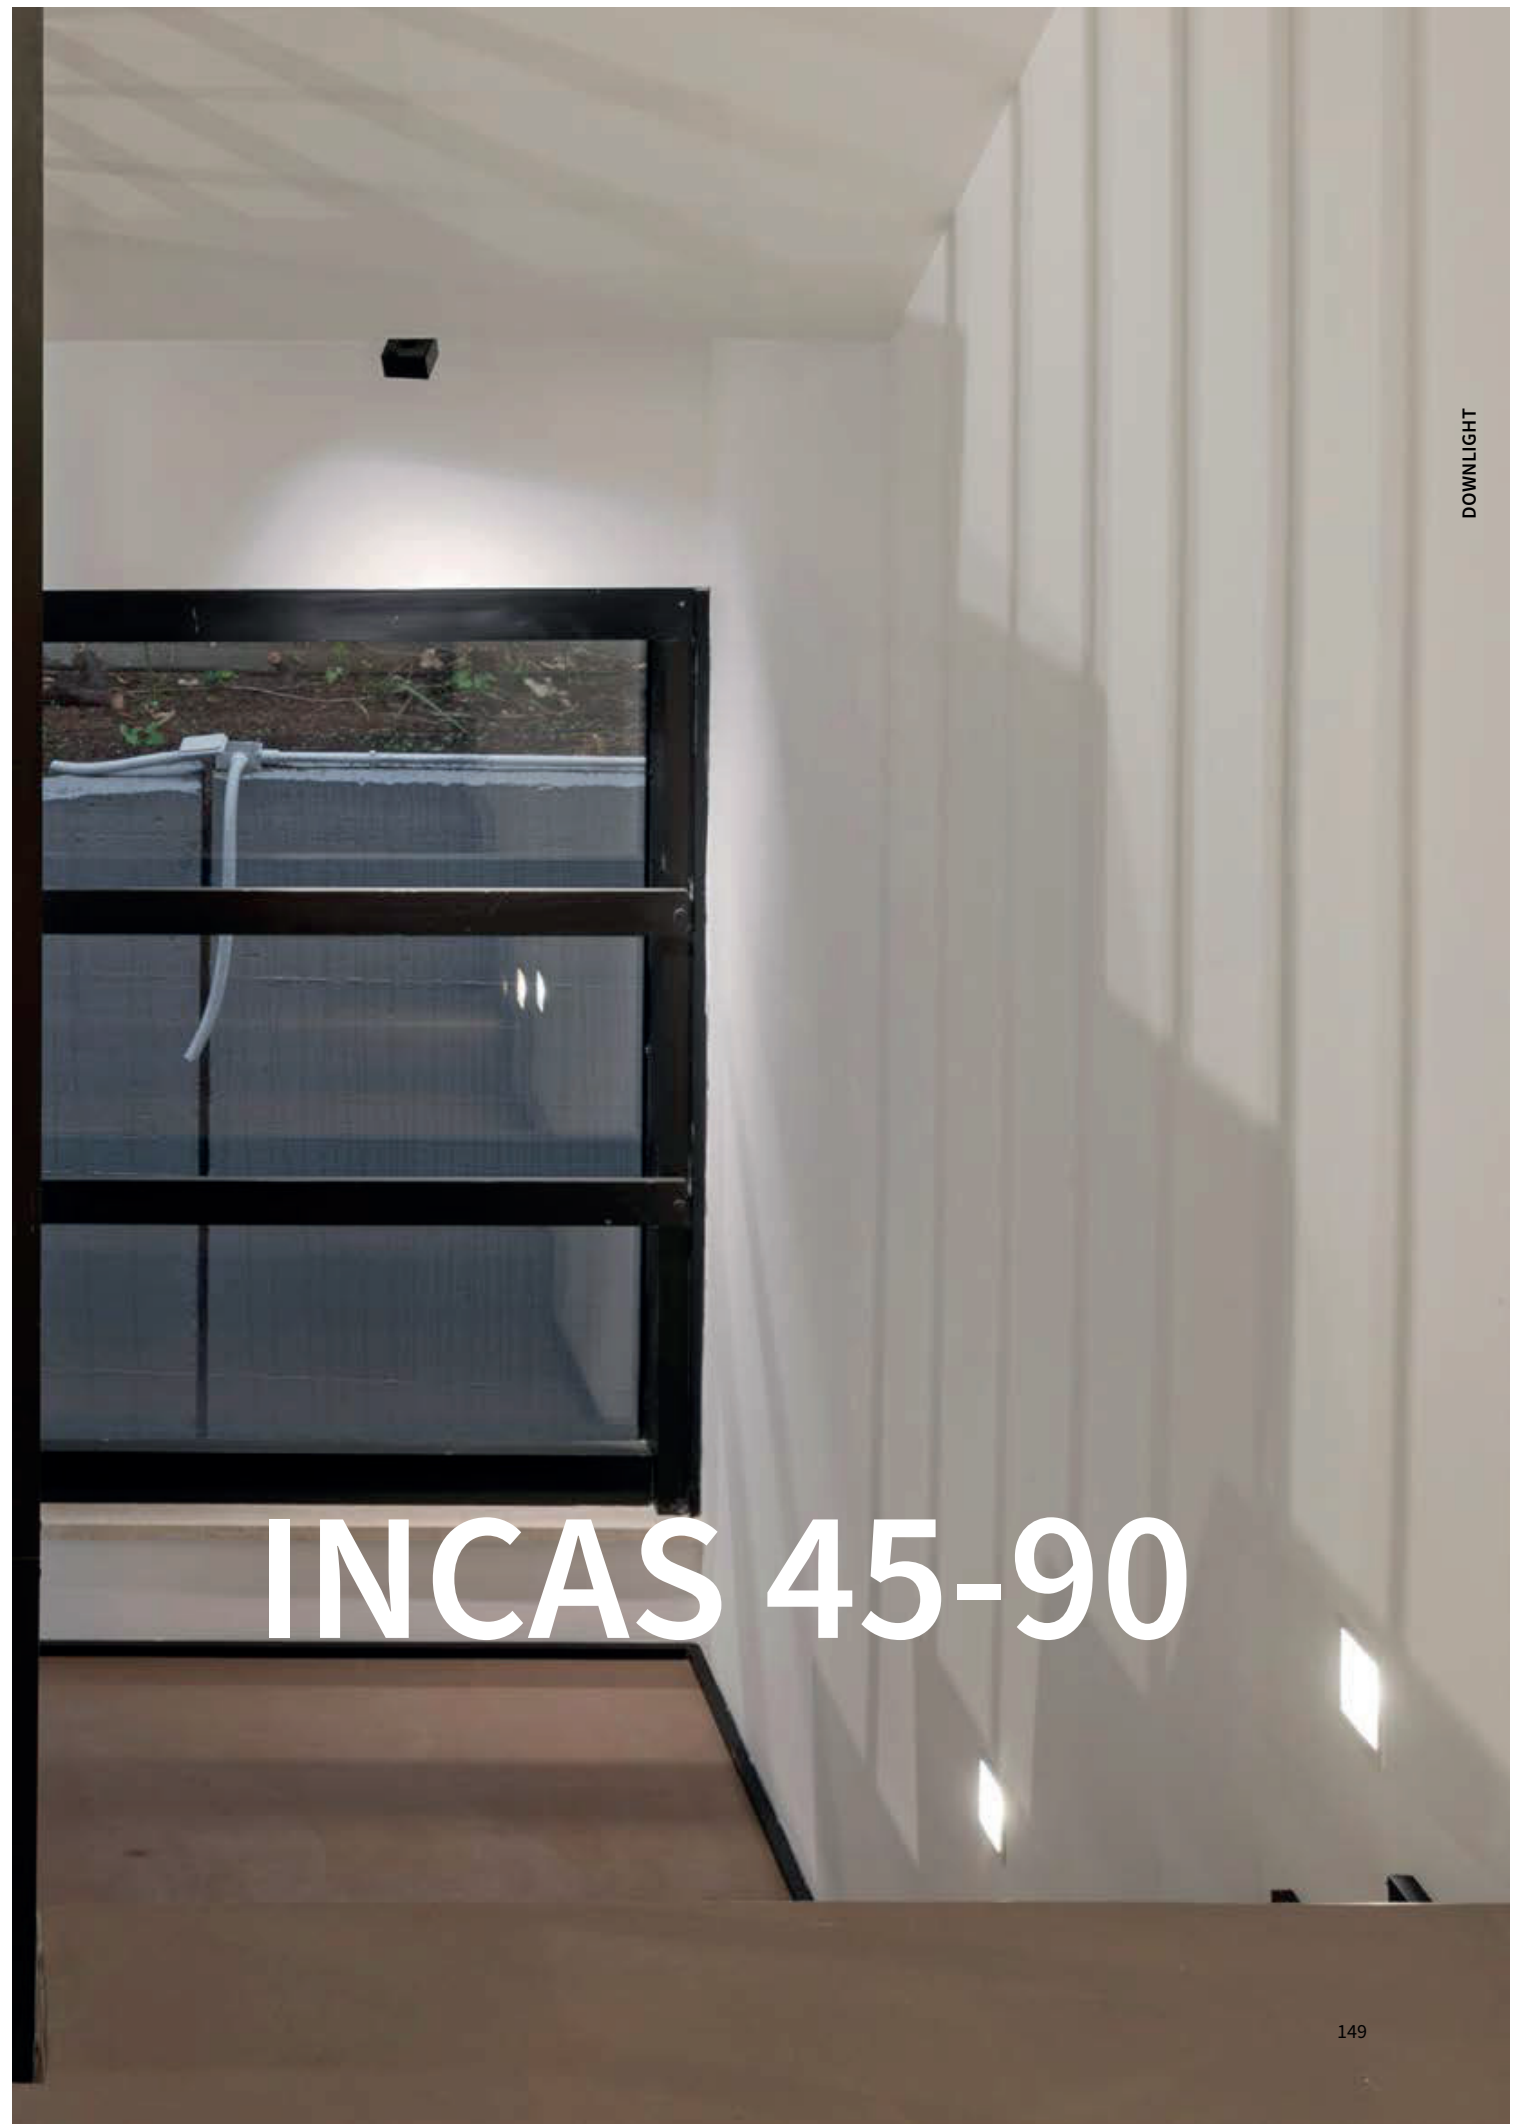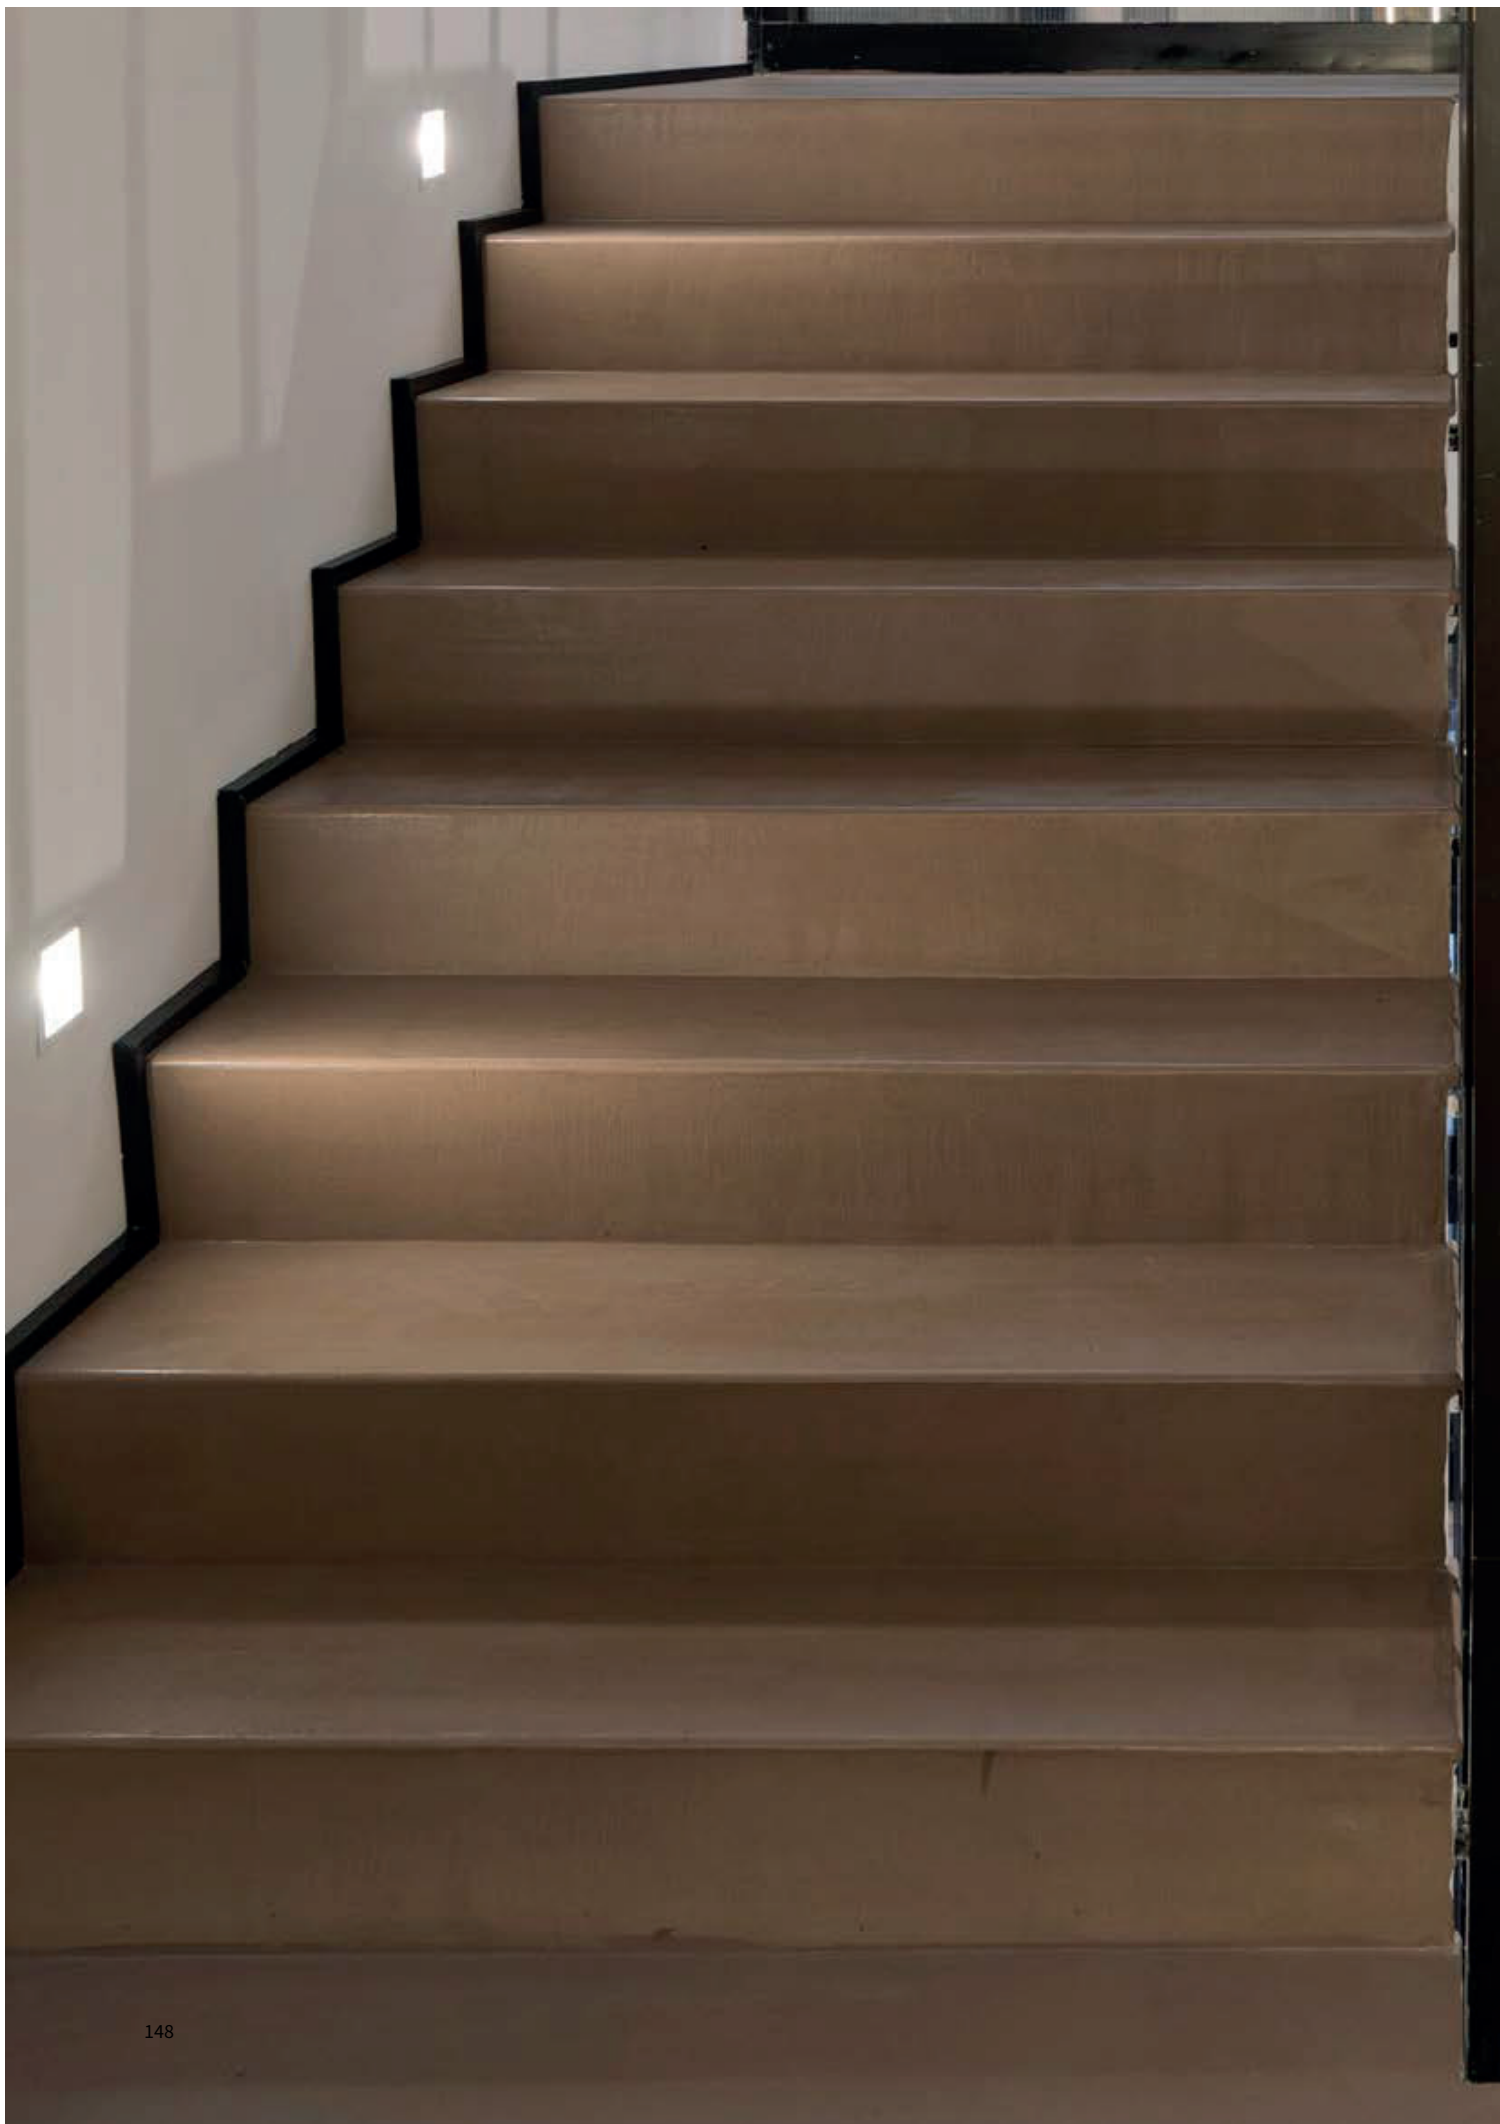

INCAS 45-90

INCAS 45 E 90

Apparecchio da incasso fisso per illuminazione d'accento o diffusa mediante impiego di vetro diffusore satinato disponibile come accessorio. Per sorgente LED integrata o per lampade LED GU10 230V / 240V. Alimentazione remota disponibile come accessorio per le sorgenti a LED integrate. Corpo e cornice di battuta metallo verniciato. Installabile, anche, in pareti e soffitti in calcestruzzo o laterizio mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20 / IP23.

Fixed recessed luminaire for accent or diffused lighting by using satin diffuser glass available as an accessory. For integrated LED source or for GU10 LED lamps 230V / 240V. Remote power supply available as an accessory for the integrated LED sources. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20 / IP23.



UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO CON APPOSITA CASSAFORMA OPZIONALE
SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE WITH THE OPTIONAL BOX



VERSIONE SORGENTE GU10 DISPONIBILE GU10 LIGHT SOURCE VERSION AVAILABLE

FASCIO / BEAM



SPOT

FINITURE / FINISHINGS



01-BIANCO / WHITE

FINITURE PREMIUM / PREMIUM FINISHINGS



81-ORO ROSA / PINK GOLD



82 BRONZO ANTICATO / ANTIQUE BRONZE



83 OTTONE BRUNITO SPAZZOLATO / BRUSHED BURNISHED BRASS

/ ## FINITURA | FINISHING

/ 01 bianco | white

COMPOSIZIONE CODICE: xxx / ##

HOW TO CREATE THE CODE: F1000 / 01

CODE

F1000.8 / ## — finishing

base code

/ ## FINITURA PREMIUM | PREMIUM FINISHING


/ 81 oro rosa / rose gold

/ 82 bronzo anticato | antique bronze

/ 83 ottone brunito spazzolato | brushed burnished brass

500 12Vac DRIVERS VEDI | SEE P.452

INCAS 45




		92X90		IP20		500	
LED	mA	Dim.	lm product / beam 3000K				
W	500	100x100x80	S22° 460	CODE			
				IN45.930S / 01			

		92X90		IP20		500	
QT-14 c G9230V		Dim.		CODE			
W	1x max 60	100x100x80		IN45G9 / 01			

Accessori - accessories: VT / IN45.90: vetro diffusore satinato incas 45 / 90 - frosted glass diffuser - CC94: cassaforma incas 90 - 45 - Wallbox incas 90 - 45

INCAS 90




		92X90		IP20		500	
LED	mA	Dim.	lm product / beam 3000K				
W	500	100x100x80	S22° 460	CODE			
				IN90.930S / 01			

		92X90		IP20		500	
GU10LED		Dim.		CODE			
W	1x max 50	100x100x80		IN90GU / 01			

Accessori - accessories: VT / IN45.90: vetro diffusore satinato incas 45 / 90 - frosted glass diffuser - CC94: cassaforma incas 90 - 45 - Wallbox incas 90 - 45

INCAS 45 MICRO




		54X54		IP20		500 12Vac	
LED	mA	Dim.	lm product / beam 3000K				
W	1,5	62x62x60	30° 136	CODE			
				IN93L2 / 01			

		54X54		IP20		500	
QT12-LP GY6,35 12V		Dim.		CODE			
W	1x max 35	62x62x60		IN93 / 01			

Accessori - accessories: VT / IN92: vetro diffusore satinato incas 45 / 90 MICRO - frosted glass diffuser - CC94M: cassaforma incas 90 - 45 micro - wallbox incas 90 - 45 micro

INCAS 90 MICRO



		54X54		IP20		500 12Vac	
LED	mA	Dim.	lm product / beam 3000K				
W	1,5	62x62x65	30° 136	CODE			
				IN92L2 / 01			

		54X54		IP20		500	
QR-CB35 GU4 12V		Dim.		CODE			
W	1x max 35	62x62x65		IN92 / 01			


Accessori - accessories: VT / IN92: vetro diffusore satinato incas 45 / 90 MICRO - frosted glass diffuser - CC94M: cassaforma incas 90 - 45 micro - wallbox incas 90 - 45 micro

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES


VETRO DIFFUSORE SATINATO FROSTED GLASS DIFFUSER

L'inserimento di questo accessorio eleva il grado di protezione dell'apparecchio ad IP40 e IP43 | the inclusion of this accessory raises the protection degree of the lamp to IP40 and IP43

INCAS 45 / 90




INCAS 45 / 90 MICRO




INCAS 45 / 90	81X84	CODE
INCAS45 / 90 MICRO	46X47	VT / IN45.90
		VT / IN92

CASSAFORMA PER LATERIZIO WALLBOX FOR BRICKWALL

INCAS 45 / 90



INCAS 45 / 90 MICRO



INCAS 45 / 90	CODE
INCAS 45 / 90 MICRO	CC94
	CC94M

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete



MINIFRAME

Apparecchio da incasso fisso per sorgente LED integrate o per lampade LED GU10 230V / 240V. Alimentazione remota disponibile come accessorio per sorgenti LED intergrate. Corpo e cornice di battuta in metallo verniciato. Installabile, anche, in pareti e soffitti in calcestruzzo o laterizio mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20 / IP23.

Fixed recessed luminaire for integrated LED source or for GU10 230V / 240V LED Light bulb. Remote power supply available as accessory for the integrated LED sources. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20 / IP23.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY

FISSO / FIXED



IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO CON APPOSITA CASSAFORMA OPZIONALE SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE WITH THE OPTIONAL BOX




SORGENTE LED DISPONIBILE GU10 LIGHT SOURCE AVAILABLE

KELVIN	FASCIO / BEAM
27 2700°K	F FLOOD
30 3000°K	W WIDE
35 3500°K	
40 4000°K	



FINITURE STANDARD / STANDARD FINISHINGS
/ 01 BIANCO / WHITE
/ 02 NERO / BLACK

FINITURE PREMIUM / PREMIUM FINISHINGS
/ 81 ORO ROSA ROSE GOLD
/ 82 BRONZO ANTICATO / ANTIQUE BRONZE
/ 83 OTTONE BRUNITO SPAZZOLATO / BURNISHED BRUSHED BRASS

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

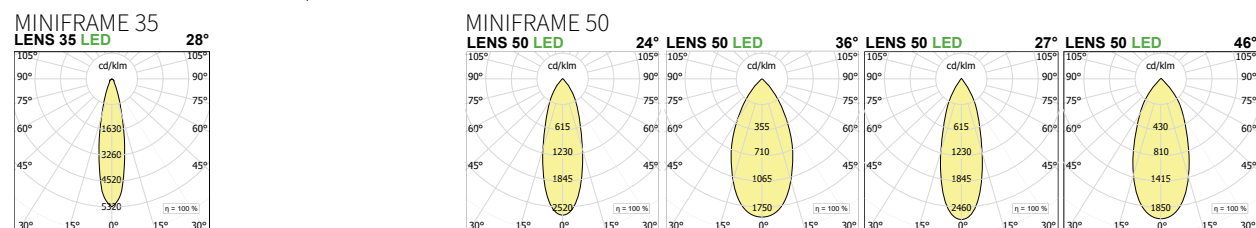

MINIFRAME 35




52X52 0-25 CRI >90 IP20 5 UK CA CE

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

LED W	mA	H	Im product / beam 3000K FZ2°	CODE
5	500	110	520	LT4102.9 ● F / ##

● disponibile solo fascio F available only F beam

MINIFRAME 50



72X72 0-25 CRI >90 IP20 5 UK CA CE

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

LED W	mA	Dim.	Lmm	Im product / beam 3000K F24°	W36°	CODE
8	250	80x80	110	860	860	LT4117.9 ● ● / ##
12	350	80x80	110	1289	1289	

LED W	mA	Dim.	Lmm	Im product / beam 3000K F27°	W46°	CODE
12	350	80x80	130	1289	1289	LT4118.9 ● ● / ##
18	500	80x80	130	1575	1579	


PER CARTONGESSO E LATERIZIO - FOR PLASTERBOARD AND CONCRETE

GU10 LED 230V W	Dim.	Lmm	CODE
1x max 50	80x80	35+lampadina	LT4104 / ##

Accessori Accessories:
LT4102.CC Cassaforma per laterizio Wallbox for brickwall

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA MINIFRAME 50 GU10 PER LATERIZIO WALLBOX MINIFRAME 50 GU10 FOR BRICK WALL



MINIFRAME 50	Dim.	H	CODE
	190X76	130	LT4102.CC

VERSIONI DISPONIBILI / AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

- / ## FINITURA | FINISHING
- / 01 bianco | white
- / 02 nero | black

● FASCIO / BEAM

- F Flood
- W Wide

/ ## FINITURA PREMIUM | PREMIUM FINISHING


- / 81 oro rosa | rose gold
- / 82 bronzo anticato | antique bronze
- / 83 ottone brunito spazzolato | brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ● ● / ##
HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ● ● / ## — finishing
base code kelvin beam

250 350 500

DRIVERS VEDI | SEE P.452

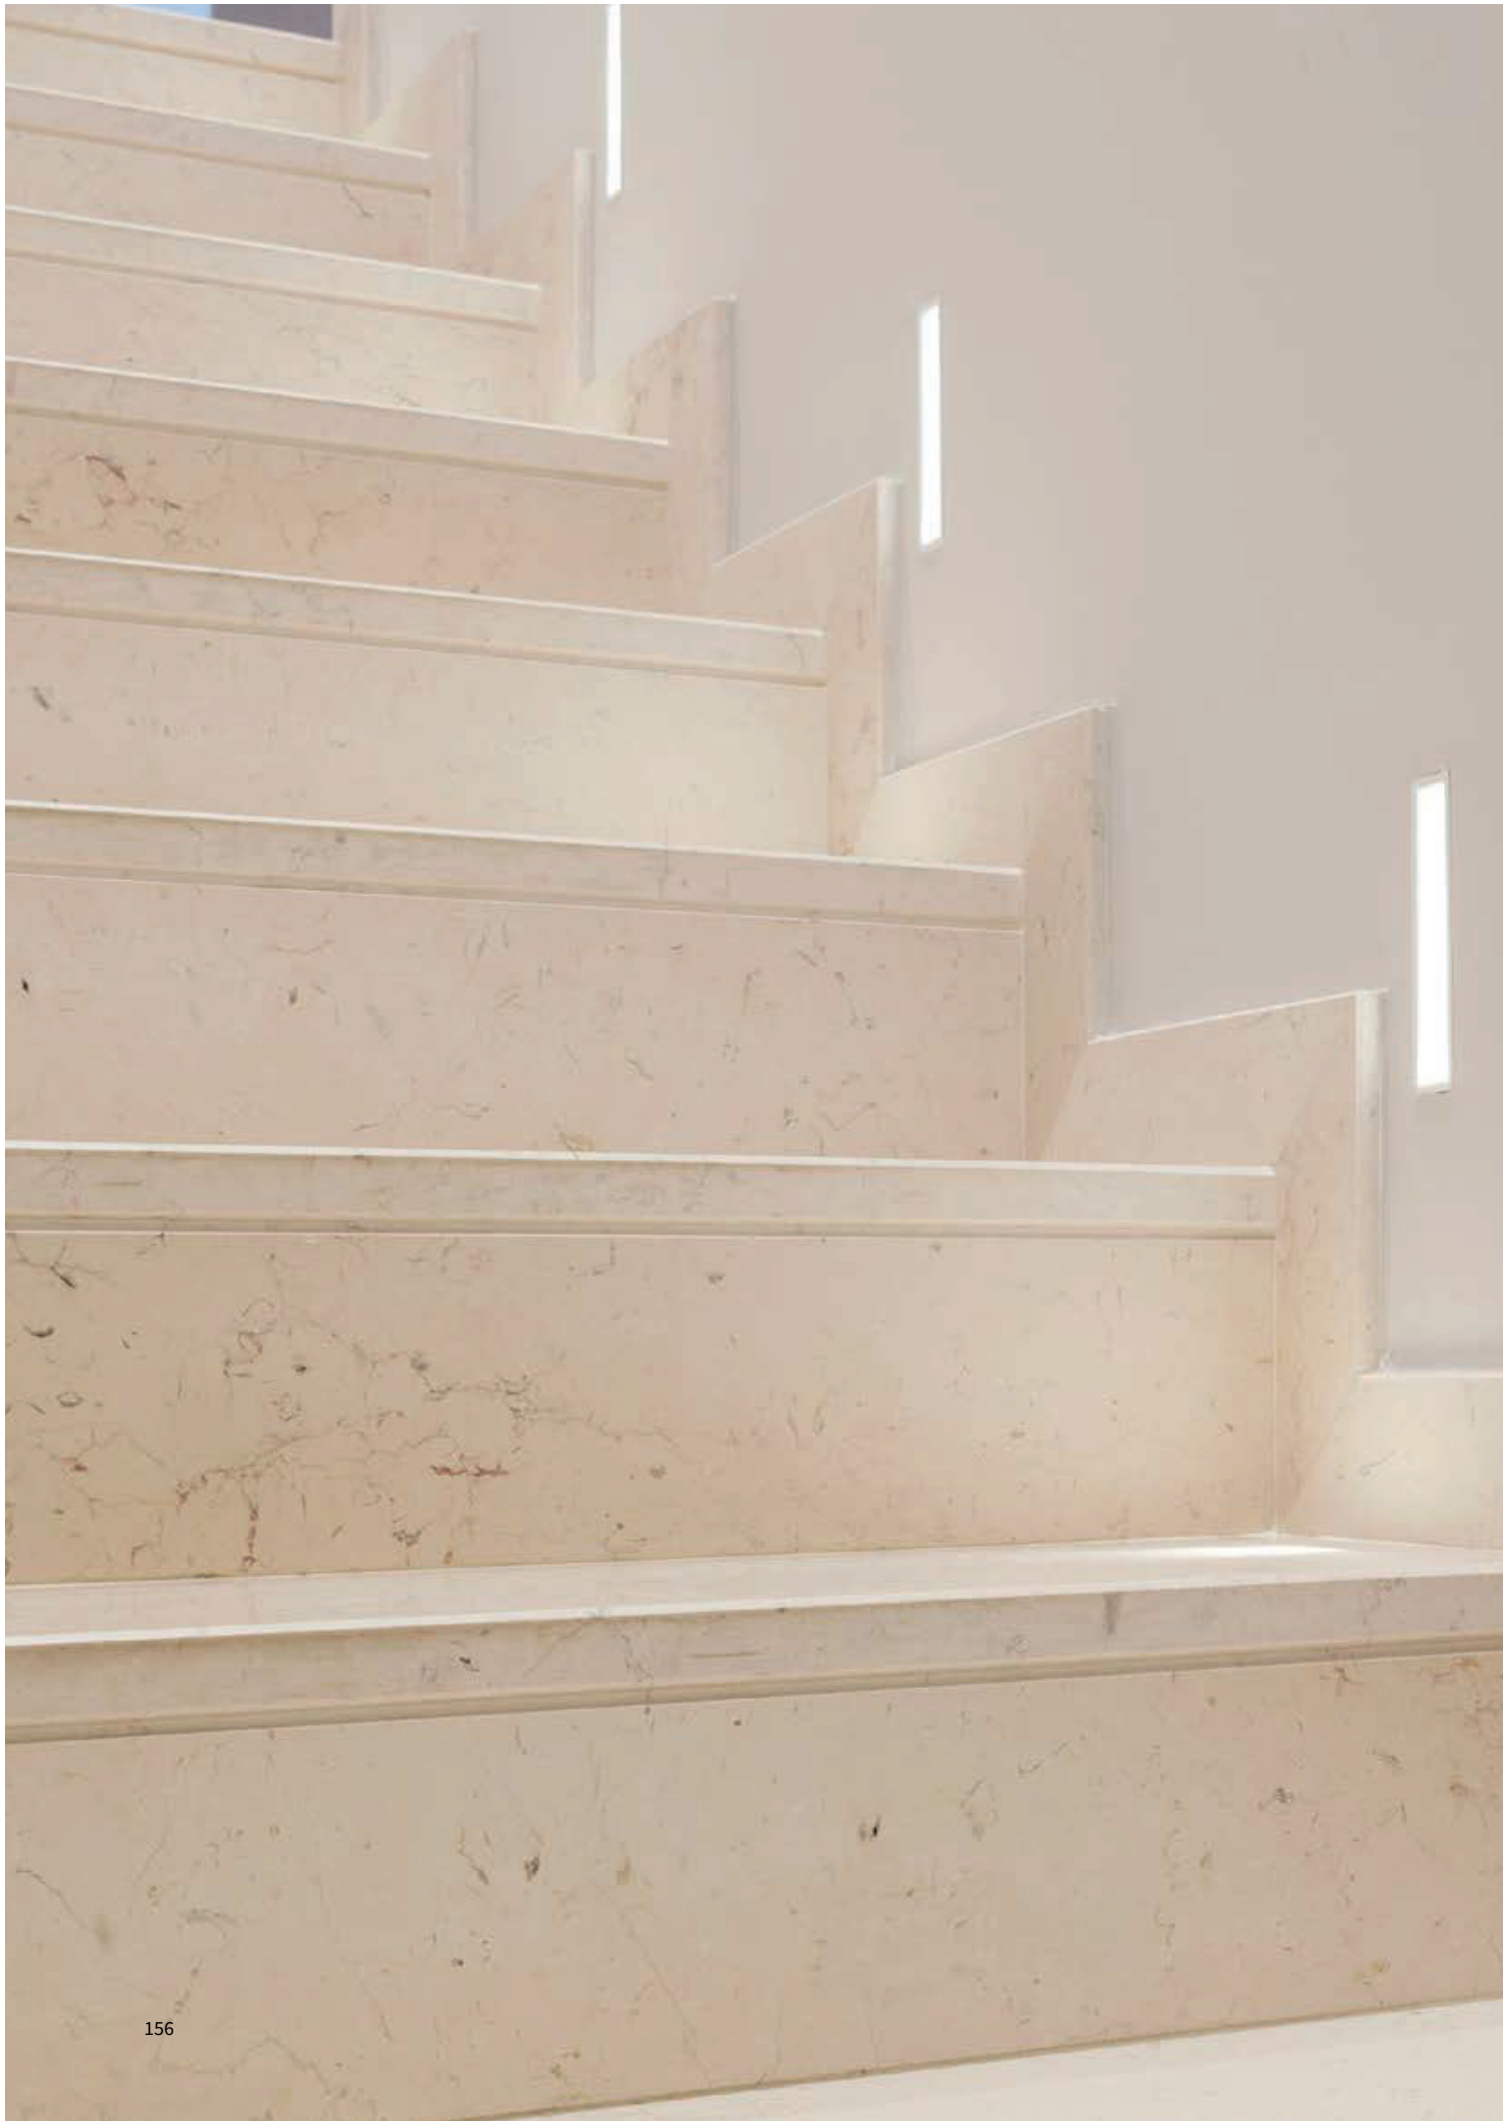

STEP

STEP

Apparecchio da incasso a parete per illuminazione segnapasso direzionata con angolo di 20°, per sorgente LED integrata con alimentazione remota disponibile come accessorio. Corpo e cornice di battuta in metallo verniciato. Installabile anche in pareti e soffitti in calcestruzzo mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20.

Recessed wall luminaire for path lighting with 20 ° angle, for integrated LED source with remote power supply available as accessory. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outer casing available as accessory. IP20.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY

FISSO / FIXED




IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO CON APPOSITA CASSAFORMA OPZIONALE
SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE WITH THE OPTIONAL BOX

FINITURE STANDARD /STANDARD FINISHINGS FINITURE PREMIUM /PREMIUM FINISHINGS

/01		BIANCO/WHITE	/81		ORO ROSA/ROSE GOLD
/02		NERO/BLACK	/82		BRONZO ANTICATO/ ANTIQU BRONZE
/60		CORTEN	/83		OTTONE BRUNITO SPAZZOLATO/ BRUSHED BURNISHED BRASS

PHOTOMETRIC DATA



/## FINITURA | FINISHING

	/01 bianco white
	/02 nero black
	/60 corten corten

FASCIO / BEAM

16°

/## FINITURA PREMIUM | PREMIUM FINISHING

	/81 oro rosa / rose gold
	/82 bronzo anticato antique bronze
	/83 ottone brunito spazzolato brushed burnished brass



500 DRIVERS VEDI | SEE P.452

COMPOSIZIONE CODICE: xxx / ##
HOW TO CREATE THE CODE: **F1000 / 01**

CODE
F1000.8 / ## — finishing
base code



STEP 75




29X69 **500**

LED	W	mA	Dim.	H	Kg	lm product/beam 3000K	CODE
	1,5	500	27x75	67	0,2	16° 252	LT1983BC / ##

Accessori - accessories: LT1992: cassaforma step 75 - Wallbox step 75

STEP 150




29X144 **500**

LED	W	mA	Dim.	H	Kg	lm product/beam 3000K	CODE
	1,5	500	27x70	142	0,4	16° 252	LT1982BC / ##

Accessori - accessories: LT1991: cassaforma step 150 - Wallbox step 150

STEP 300




29X372 **500**

LED	W	mA	Dim.	H	Kg	lm product/beam 3000K	CODE
	1,5	500	27x70	370	0,7	16° 252	LT1981BC / ##

Accessori - accessories: LT1990: cassaforma step 300 - Wallbox step 300


ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA WALLBOX




STEP75	Dim. 30x80	H 220	CODE LT1992
--------	---------------	----------	-----------------------

Idonea anche per calcestruzzo. Suitable also for brickwall.





STEP150	Dim. 30x80	H 265	CODE LT1991
---------	---------------	----------	-----------------------

Idonea anche per calcestruzzo. Suitable also for brickwall.



STEP300	Dim. 30x80	H 492	CODE LT1990
---------	---------------	----------	-----------------------

Idonea anche per calcestruzzo. Suitable also for brickwall.

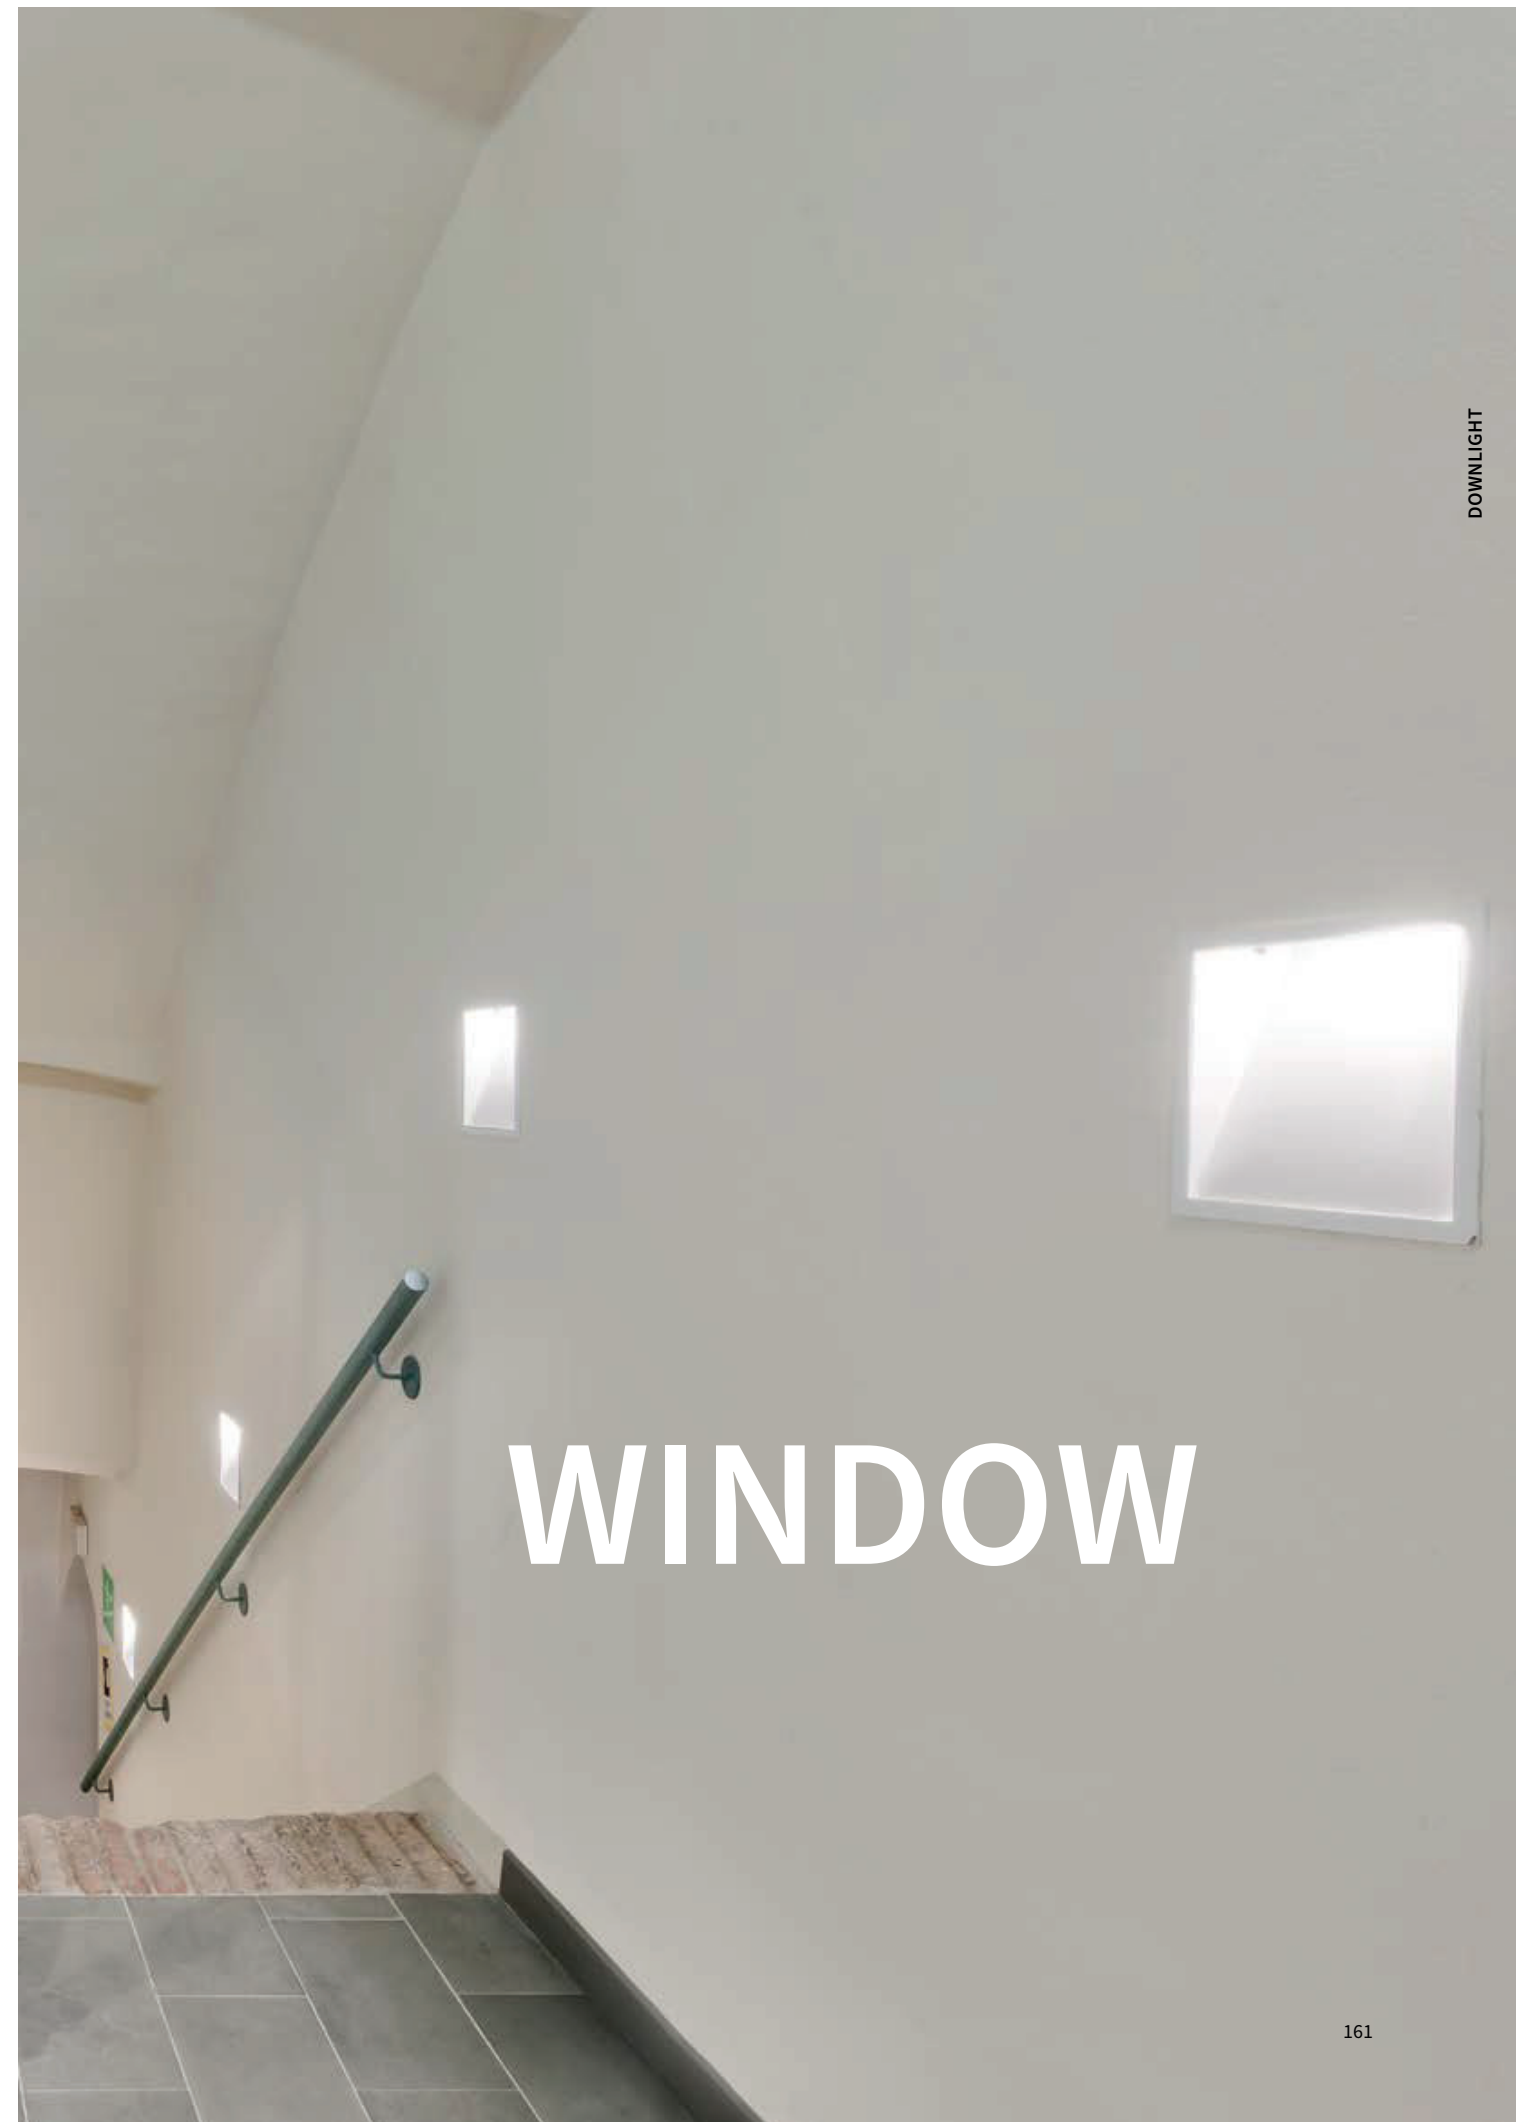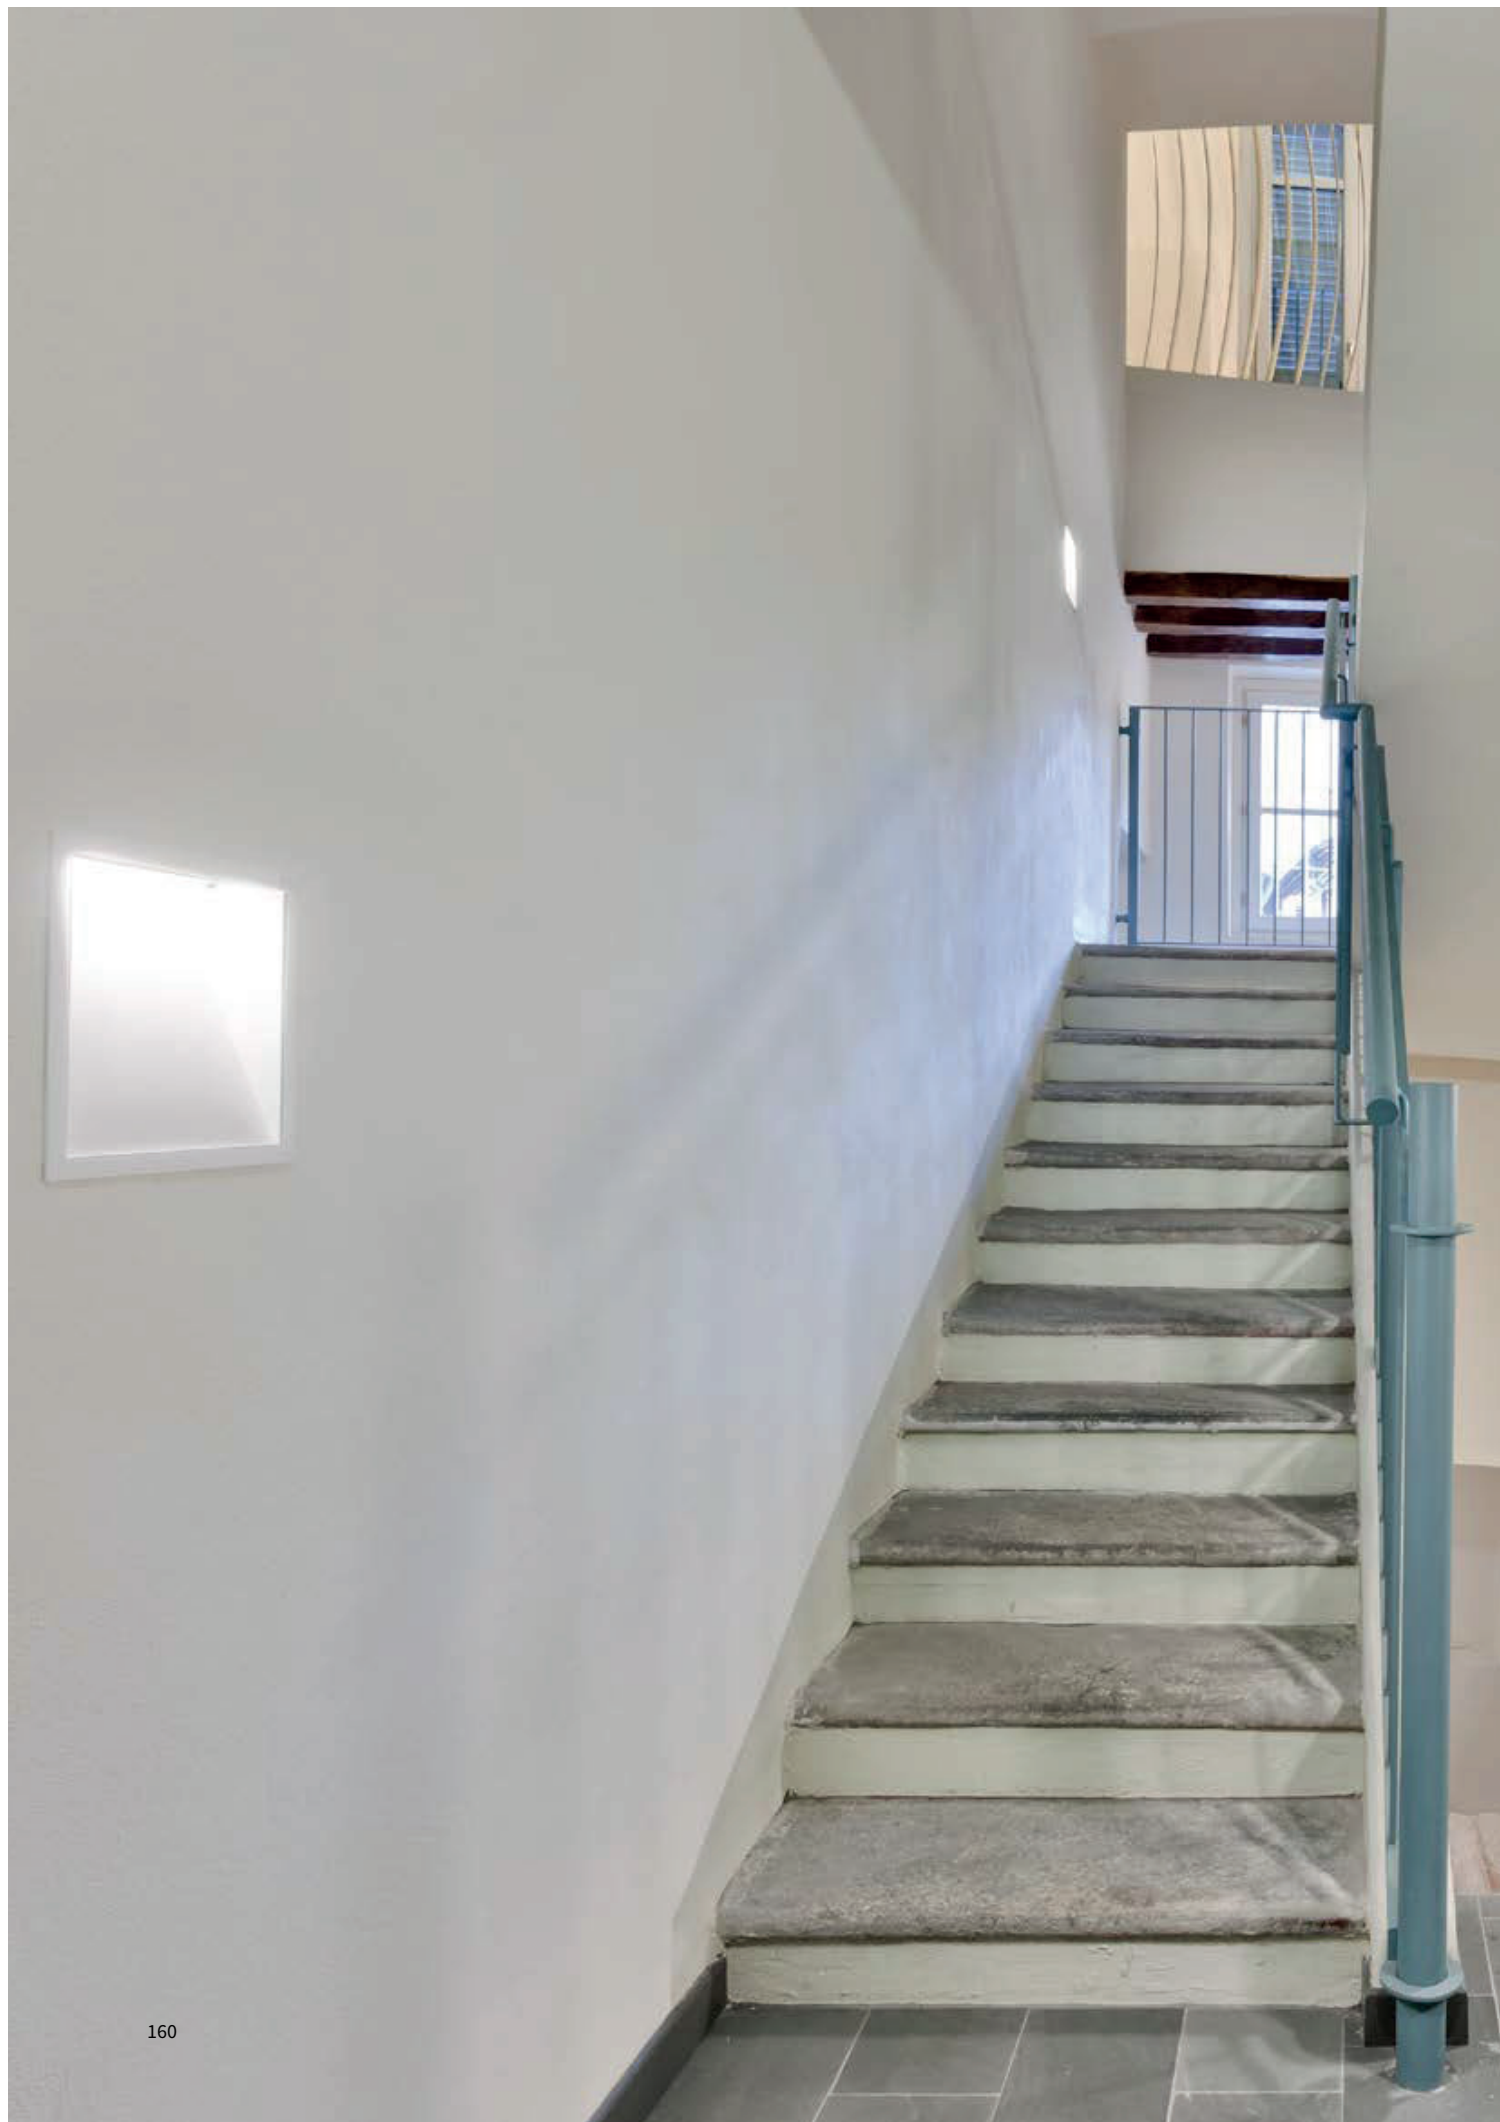

WINDOW

WINDOW

Apparecchio da incasso a parete per illuminazione segnapasso direzionata con angolo di 20°, per sorgente LED integrata con alimentazione remota disponibile come accessorio. Corpo e cornice di battuta in metallo verniciato. Installabile a cartongesso, ma anche in pareti e soffitti in calcestruzzo mediante apposita cassaforma in lamiera zincata disponibile come accessorio solo per la versione Frame. Grado di protezione IP20.

Recessed wall luminaire for path lighting with 20 ° angle, for integrated LED source with remote power supply available as accessory. Body and frame in painted metal. It is suitable for plasterboard, but can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory just for the Frame version. IP20.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED




IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO CON APPOSITA CASSAFORMA OPZIONALE / SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE WITH THE OPTIONAL BOX

FINITURE / FINISHINGS



01-BIANCO / WHITE



VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 40 4000K

/ ## FINITURA | FINISHING

□ / 01 bianco | white

350 DRIVERS VEDI | SEE P.452

WINDOW FRAME



WINDOW 224 INCASSO CON BATTUTA RECESSED WITH FRAME



LED W	mA	lm prod	CODE
12,4	350	770	WI001.9 ● / 01

Accessori - accessories: LT1692: 224 - 224

WINDOW 306 INCASSO CON BATTUTA RECESSED WITH FRAME




LED W	mA	lm prod	CODE
12,4	350	770	WI001.9 ● / 01

Accessori - accessories: LT1693: 306 - 306


ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA PER LATERIZIO O CALCESTRUZZO WALLBOX FOR BRICKWALL OR CONCRETE



CODE
LT1692

Cassaforma in lamiera zincata da murare in pareti di laterizio o calcestruzzo per l'articolo WINDOW 224. | Galvanized sheet formwork to be installed in brick or concrete walls for Window 224.
Solo per versioni con cornice. Only for frame version



CODE
LT1693

Cassaforma in lamiera zincata da murare in pareti di laterizio o calcestruzzo per l'articolo WINDOW 306. | Galvanized sheet formwork to be installed in brick or concrete walls for window 306.
Solo per versioni con cornice. Only for frame version

WINDOW MINIMAL

WINDOW M 224 INCASSO RASATO TRIMLESS RECESSED



LED W	mA	lm prod	CODE
12,4	350	770	WI101.9 ● / 01

Per installazione in pareti di laterizio **non** necessita di cassaforma / For installation in brick walls does not require wallbox

WINDOW M 306 INCASSO RASATO TRIMLESS RECESSED



LED W	mA	lm prod	CODE
12,4	350	770	WI111.9 ● / 01

Per installazione in pareti di laterizio **non** necessita di cassaforma / For installation in brick walls does not require wallbox.