

CUBOTTI


MINI TRACK

Collezione di apparecchi per un'illuminazione a binario 24V/48V. Apparecchi a luce diretta. disponibili in due versioni per sorgenti a tensione di rete LED con attacco GU10 o G9. Corpo a sezione quadrata in estruso di alluminio in finitura verniciata. Completati di staffa per fissaggio a soffitto o parete a seconda del modello. Grado di protezione IP20 e classe I.

Ceiling or wall mounted luminaires for direct or direct/indirect lighting, for LED mains voltage sources with GU10 or G9 socket. Square section body in extruded aluminum in painted finish. Complete with bracket for ceiling or wall mounting depending on the model. IP20 and class I.

KELVIN		FASCIO / BEAM		FINITURE P / P FINISHINGS	
27	 2700°K	S	 SPOT	/ 01	 BIANCO / WHITE
30	 3000°K	F	 FLOOD	/ 02	 NERA / BLACK
35	 3500°K	W	 WIDE	FINITURE FC / FC FINISHINGS	
40	 4000°K			/ 01	 TELAIO BIANCO OTTICA NERA / WHITE FRAME BLACK OPTIC
TW	 Tunable White			/ 02	 TELAIO NERO OTTICA NERA / BLACK FRAME BLACK OPTIC
				/ 41	 TELAIO BIANCO OTTICA BIANCA / WHITE FRAME WHITE OPTIC
				/ 42	 TELAIO NERO OTTICA ORO / BLACK FRAME GOLD OPTIC
FINITURE PREMIUM / PREMIUM FINISHINGS					
	 81-ORO ROSA / PINK GOLD	 82-BRONZO ANTICATO / ANTIQUE BRONZE	 83-OTTONE SATINATO / BRUSHED BRASS		

CURVE FOTOMETRICHE/PHOTOMETRIC DATA

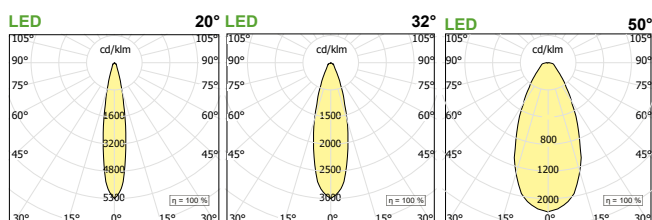








MINITRACK

CUBOTTI

CUBOTTI F

MINI TRACK INCASSO | RECESSED MINI TRACK





LED 24Ve48V				Im prod./beam 3000K				CODE
W	Dim.	H	Kg	S20°	F32°	W50°		
8,8	70x70	90 + adapter	0,80	800	745	662	CB001. 9	●●●/##

Binario non incluso / mini track not included

CUBOTTI C

MINI TRACK SOFFITTO | CEILING MINI TRACK



LED 24Ve48V				Im prod./beam 3000K				CODE
W	Dim.	H	Kg	S20°	F32°	W50°		
8,8	70x70	110	0,80	800	745	662	CB002. 9	●●●/##

Binario non incluso / mini track not included

● KELVIN

27 2700K
30 3000K
35 3500K
40 4000K
TW Tunable White



● FASCIO/BEAM

S Spot 20°
F Flood 32°
W Wide 50°

● DIMMABLE (OPTIONAL)

D Dali Touch & Dimm

Per la versione Dali scegliere un alimentatore ON OFF da posizionare remoto (per alimentare il binario).
 For Dali version combine a ON OFF power supply to place remotely (for feed the track)


/ ## FINITURA/FINISHING



/01 telaio bianco, ottica nera | white frame, black optic
/02 telaio nero, ottica nera | black frame, black optic
/41 telaio bianco, ottica bianca | white frame, white optic
/42 telaio nero, ottica oro | black frame, gold optic

FINITURE PREMIUM DISPONIBILI / PREMIUM FINISHINGS ARE AVAILABLE



CUBOTTI PF MINI TRACK INCASSO | RECESSED MINI TRACK



LED		Im product / beam 3000K				
W	mm	Hmm	Kg	F27°	W46°	CODE
8	70x70	110	0,28	860	860	CB101.9 ● ● / ##
12	70x70	110	0,28	1285	1285	CB103.9 ● ● / ##

Binario non incluso / mini track not included

CUBOTTI PC MINI TRACK SOFFITTO | CEILING MINI TRACK



LED		Im product / beam 3000K				
W	mm	Hmm	Kg	F27°	W46°	CODE
8	70x70	110	0,28	860	860	CB102.9 ● ● / ##
12	70x70	110	0,28	1285	1285	CB104.9 ● ● / ##

Binario non incluso / mini track not included

● KELVIN

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

● FASCIO/BEAM



- F Flood 27°
- W Wide 46°

/ ## FINITURA / FINISHING

- /01 bianco/white
- /02 nero/black
- /49 bronzo / bronze

FINITURE PREMIUM / PREMIUM FINISHINGS

- /81 oro rosa/rose gold
- /82 bronzo anticato /antique bronze
- /83 ottone brunito spazzolato/ brushed burnished brass

48V DRIVERS VEDI | SEE "ALIMENTATORI" A PAGINA 452