



VERSIONI DISPONIBILI/ AVAILABLE VERSION

● KELVIN

27 2700K

30 3000K

35 3500K

40 4000K

● FASCIO/BEAM

S Spot

F Flood

Z Asymmetric



○ FASCIO/BEAM

F Flood

W Wide



Per i gradi vedi in tabella. For degree check the table.

● DIMMABLE (OPTIONAL)

D Dali Touch & Dimm

Per la versione Dali scegliere un alimentatore ON OFF da posizionare remoto.

For Dali version combine a ON OFF power supply to place remotely

/ ## FINITURA/FINISHING


/01 bianco | white

/02 nero | black



/03 cromo | chrome





48V DRIVERS VEDI | SEE "ALIMENTATORI" A PAGINA 45

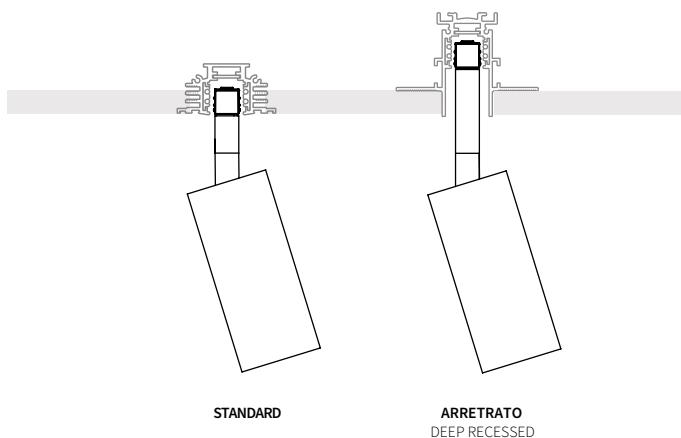



FOCUS 26



FOCUS 36





FOCUS 55





ACCESSORI / ACCESSORIES

	LENTI / LENSES	Kg	Ø	CODE	Ø	CODE	Ø	CODE	Col.
●	LENTE SATINATA / SATINED LENS	0,01	26	L026S.A/	36	L036S.A/	55	L055S.A/	01-02
●	LENTE ELISSOIDALE / ELIPSOID LENS	0,01	26	L026E.A/	36	L036E.A/	55	L055E.A/	01-02
●	LENTE ASIMMETRICA / ASYMMETRIC LENS	0,01	26	L026A.A/	36	L036A.A/	55	L055A.A/	01-02
●	FILTRO NIDO D'APE / HONEY COMB LOUVER	0,01	26	L026R.A/	36	L036R.A/	55	L055R.A/	01-02



FOCUS T26 MINI TRACK 24/48V





FOCUS T36 MINI TRACK 24/48V





FOCUS T55 MINI TRACK 24/48V



FOCUS 2T26 MINI TRACK 48V



FOCUS 2T36 MINI TRACK 48V



STANDARD

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°		CODE
5,7	26	85	166	571		FS501.9 ● ● ● /##

● Disponibile solo fascio **F** | Available only **F** beam

ARRETRATO DEEP RECESSED TRACK

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°		CODE
5,7	26	110	166	571		FS501A.9 ● ● ● /##

● Disponibile solo fascio **F** | Available only **F** beam

STANDARD

LED 48V				lm product/beam 3000K			
W	ømm	Hmm	Lmm	S19°	F25°	Z18°x38°	CODE
8	36	92	166	665	695	508	FS502.9    /##

ARRETRATO DEEP RECESSED TRACK

LED 48V				lm product/beam 3000K			
W	ømm	Hmm	Lmm	S19°	F25°	Z18°x38°	CODE
8	36	117	166	665	695	508	FS502A.9 /##

STANDARD

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°	W46°	CODE
12,7	55	138	166	1285	1289	FS504.9 ● ● ● /##
18,5	55	138	166	1575	1579	FS503.9 ● ● ● /##

● Disponibili solo fascio **F, W** | Available only **F, W** beam

ARRETRATO DEEP RECESSED TRACK

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°	W46°	CODE
12,7	55	162	166	1285	1289	FS504A.9 ● ● ● /##
18,5	55	162	166	1575	1579	FS503A.9 ● ● ● /##

● Disponibili solo fascio **F, W** | Available only **F, W** beam

Accessori - accessories: L055#.A: Anello ø55 + lente - lens with ring ø55



STANDARD

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°		CODE
2 x 6,2	26	85	166	1142		FS551.9 ● ● ● /##

ARRETRATO DEEP RECESSED TRACK

LED 48V					lm product/beam 3000K	
W	ømm	Hmm	Lmm	F27°		CODE
2 x 6,2	26	110	166	1142		FS551A.9 ● ● ● /##

STANDARD

LED 48V				lm product/beam 3000K			
W	ømm	Hmm	Lmm	S19°	F25°	Z18°x38°	CODE
2 x 8.7	36	92	166	1330	1390	1016	FS552.9 ●●●/##

ARRETRATO DEEP RECESSED TRACK

LED 48V				lm product/beam 3000K			
W	ømm	Hmm	Lmm	S19°	F25°	Z18°x38°	CODE
2 x 8,7	36	117	166	1330	1390	1016	FS552A.9    /##