




CONVEX

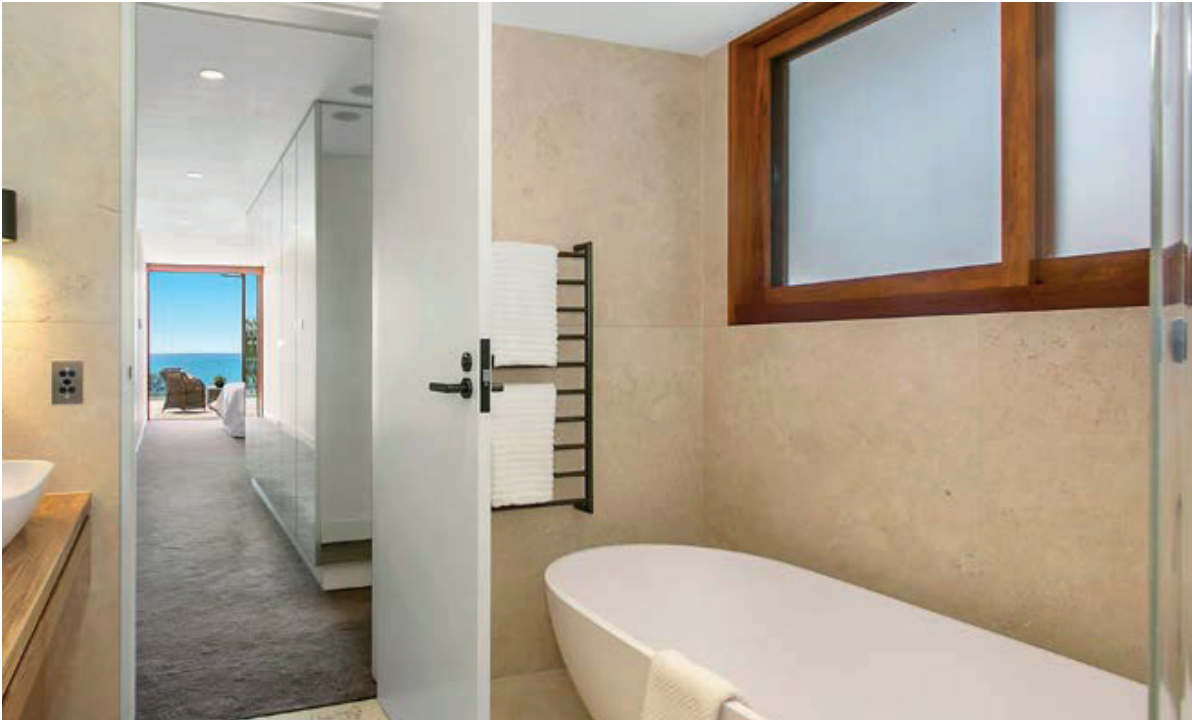


FISSO | FIXED

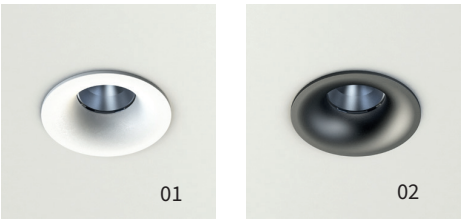

taglio per incasso / recessed hole dimension Ø 75
spazio per passaggio alimentatore / necessary space to insert driver 75



LED		W	mA	Ø	H	Kg	Im product / beam 3000K F 27°	W 46°	CODE
	Ø 84	8	250	84	90	0,35	860	860	CV018.9 ● / ##
		12	350	84	90	0,35	1285	1285	

LED		W	mA	Ø	H	Kg	Im product / beam 3000K F 27°	W 46°	CODE
		12	350	84	110	0,35	1285	1285	CV019.9 ● / ##
		18	500	84	110	0,35	1575	1575	

GU10		W	Ø mm	H mm	Kg	CODE
		50	84	110	0.21	CV020


NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED

ACCESSORIO PER TRASFORMARE CONVEX IN VERSIONE TRIMLESS ACCESSORY TO TRANSFORM CONVEX IN TRIMLESS RECESSED



Ø ESTERNO / EXTERNAL 100 mm

CODE
CV030



VERSIONI DISPONIBILI / AVAILABLE VERSION

KELVIN		FASCIO / BEAM		FINITURA FINISHING	
27	2700K	F	Flood 27°	01	bianco white
30	3000K	W	Wide 46°	02	nero black
35	3500K				
40	4000K				

COMPOSIZIONE CODICE: xxx.x ● ● / ##
HOW TO CREATE THE CODE: F1000.827S / 01

CODE		base code		kelvin	beam	finishing
F1000.8				27	46°	01

DRIVERS VEDI | SEE P.452