

I-KONE

FRAME RECESSED




FISSO | FIXED



INCLINABILE | ADJUSTABLE



FISSO | FIXED





LED		Im product / beam 3000K		CODE	
W	mA	ø	H	Kg	
8	250	88	111	0,35	860 860
12	350	88	111	0,35	1285 1285
					IK006.9 ● ● / ##

LED		Im product / beam 3000K		CODE	
W	mA	ø	H	Kg	
12	350	88	131	0,35	1285 1289
18	500	88	131	0,35	1575 1579
					IK007.9 ● ● ● / ##

GU10				     	
W	ø.mm	H.mm	Kg	CODE	
50	88	94	0.21	IK008 / ##	

INCLINABILE | ADJUSTABLE

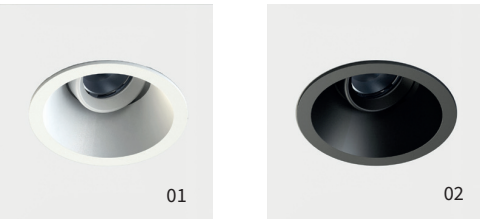

LED		Im product / beam 3000K		CODE	
W	mA	ø	H	α	Kg
8	250	103	111	30	0,35
12	350	103	111	30	0,35
					1285 1285
					IK010.9 ● ● ● / ##

LED		Im product / beam 3000K		CODE	
W	mA	ø	H	α	Kg
12	350	103	131	30	0,35
18	500	103	131	30	0,35
					1285 1285
					1575 1579
					IK011.9 ● ● ● / ##

GU10				      
W	ø.mm	H.mm	Kg	CODE
50	103	94	0.21	IK012 / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

KELVIN		FASCIO / BEAM		FINITURA / FINISHING	
27	2700K	F	Flood 27°	01	bianco white
30	3000K	W	Wide 46°	02	nero black
35	3500K				
40	4000K				

COMPOSIZIONE CODICE: xxx.x ● ● /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE		FINISHING	
base code	kelvin	beam	
F1000.8	27	46	01

DRIVERS VEDI | SEE P.452

I-KONE

MINIMAL RECESSED




FISSO | FIXED



INCLINABILE | ADJUSTABLE




FISSO | FIXED

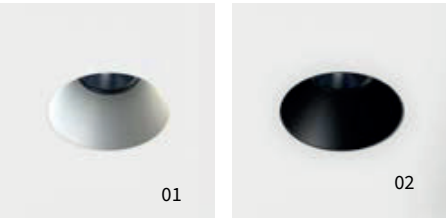


NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED

taglio per incasso / recessed hole dimension  Ø 77
spazio per passaggio alimentatore / necessary space to insert driver  Ø 46



LED								lm product/beam 3000K			250	350
W	mA	ø	H	α	Kg	F27°	W46°	CODE				
8	250	86	106	20	0,35	860	860	IK000.9 ● ● / ##				
12	350	86	106	20	0.35	1285	1285					



LED							lm product / beam 3000K		350	500
W	mA	ø	H	α	Kg	F27°	W46°	CODE		
12	350	86	126	20	0,35	1285	1285	IK001.9 ● ● / ##		
18	500	86	126	20	0,35	1575	1579			

GU10		W	ø mm	H mm	Kg	CODE	IK002
50		86	99	0,21			




INCLINABILE | ADJUSTABLE




NOTE: COMPLETARE CON DRIVER | DRIVER NOT INCLUDED

taglio per incasso / recessed hole dimension  Ø 70
spazio per passaggio alimentatore / necessary space to insert driver  46



LED										250	350
W	mA	ø	L	α	Kg	lm product/beam 3000K		CODE	IK003.9 ●●●/##		
8	250	84	98	30	0,35	F27°	W46°				
12	350	84	98	30	0,35	860	860				
						1285	1285				



LED							lm product/beam 3000K		350	500
W	mA	ø	H	α	Kg	F27°	W46°	CODE		
12	350	84	118	30	0,35	1285	1285	IK004.9 ●●●/##		
18	500	84	118	30	0,35	1575	1579			

GU10		W	ø mm	H mm	Kg	CODE	IK005 / ##
50		84	94	0,21			



VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN		● FASCIO / BEAM		/ ## FINITURA FINISHING	
27	2700K	F	Flood 27°		/ 01 bianco white
30	3000K	W	Wide 46°		/ 02 nero black
35	3500K				
40	4000K				

COMPOSIZIONE CODICE: xxx.x ● ● /

HOW TO CREATE THE CODE: F1000.827S / 01

CODE		/ ##	
F1000.8	● ●	/ ##	— finishing
base code	kelvin	beam	

250 350 500 DRIVERS VEDI | SEE P.452 57