




MANINE

MANINE

VERSIONE ANGOLO **ESTERNO**
EXTERNAL ANGLE VERSION

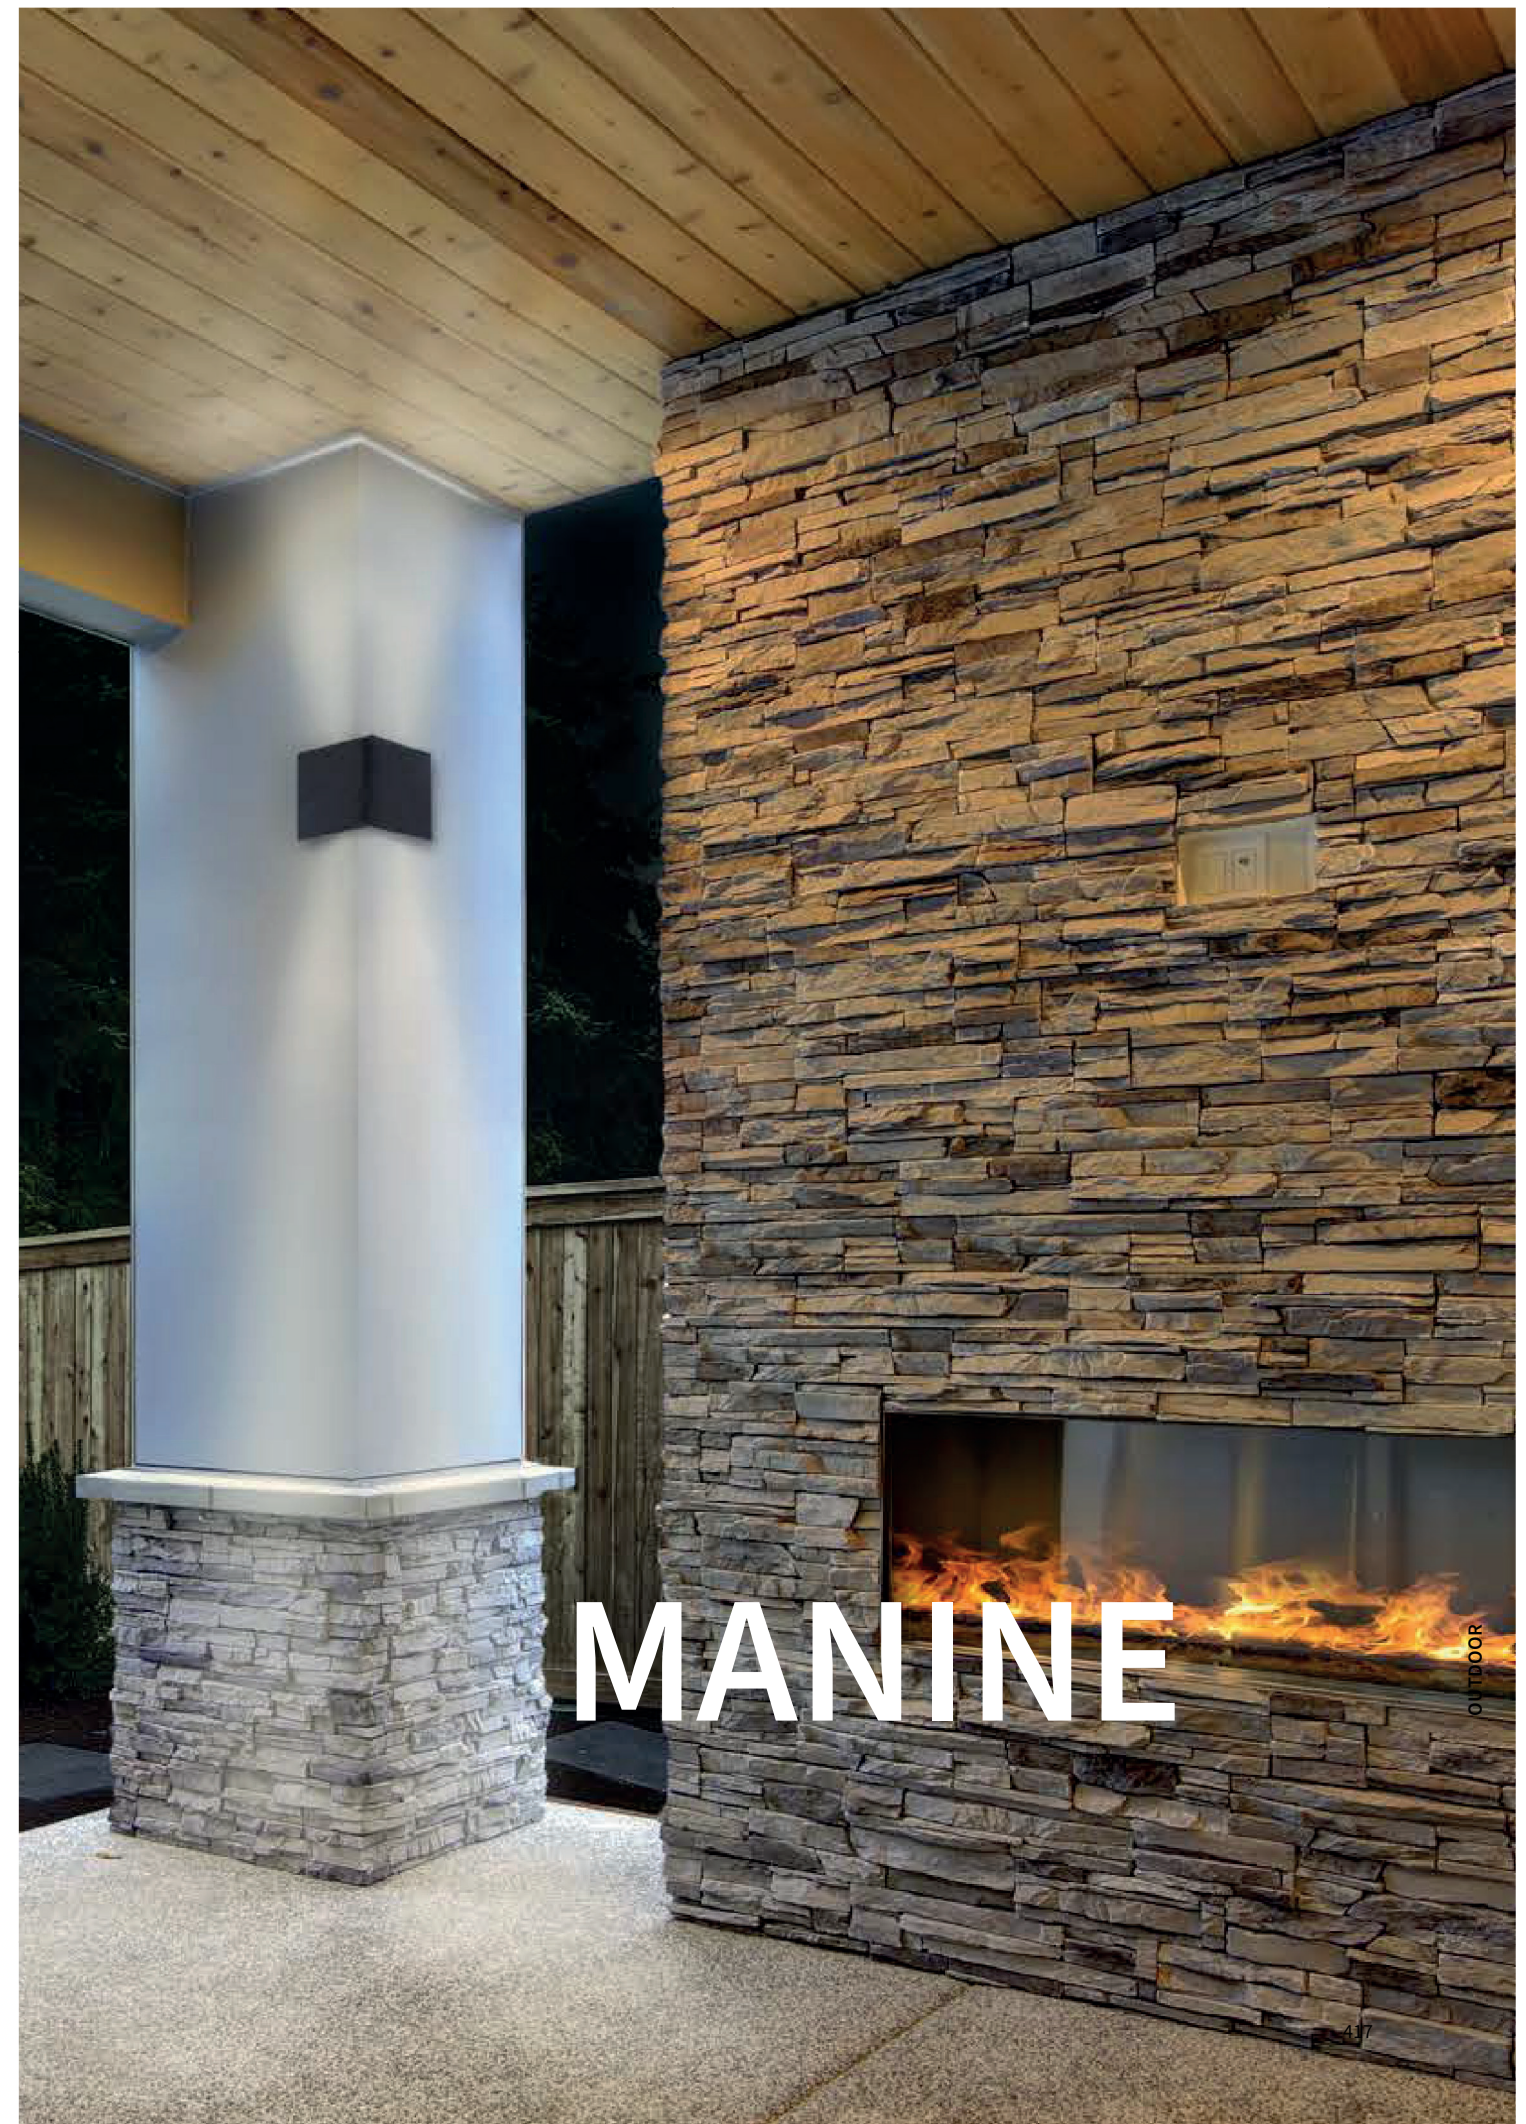

VERSIONE ANGOLO **INTERNO**
INTERNAL ANGLE VERSION



VERSIONE **PIATTA** DA PARETE
FLAT WALL VERSION



Apparecchi a parete mono o biemissione per illuminazione d'accento e di pareti ed angoli. Gruppo ottico completo di sorgenti LED professionali, con alimentazione integrata. Disponibili in versione ad angolo interno 90°, ad angolo esterno 270° oppure piatta, versione SPOT con fascio di luce stretta o DIFFUSED con fascio di luce più largo e diffuso. Corpo in metallo finitura verniciata. Grado di protezione IP40.

Single or double emission wall mounted luminaires for wall enhancing and corner lighting. Optical unit complete with professional LED sources, with integrated power supply. Available in 90° internal angle, 270° external angle or flat version, SPOT version with narrow light beam or DIFFUSED with wider and diffused light beam. Painted finish metal body. IP40.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RECICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY

KELVIN		
27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO/BEAM



SPOT



DIFFUSED

FINITURE STANDARD / STANDARD FINISHINGS

/01



BIANCO/WHITE

/02




NERO/BLACK

/60





CORTEN / CORTEN

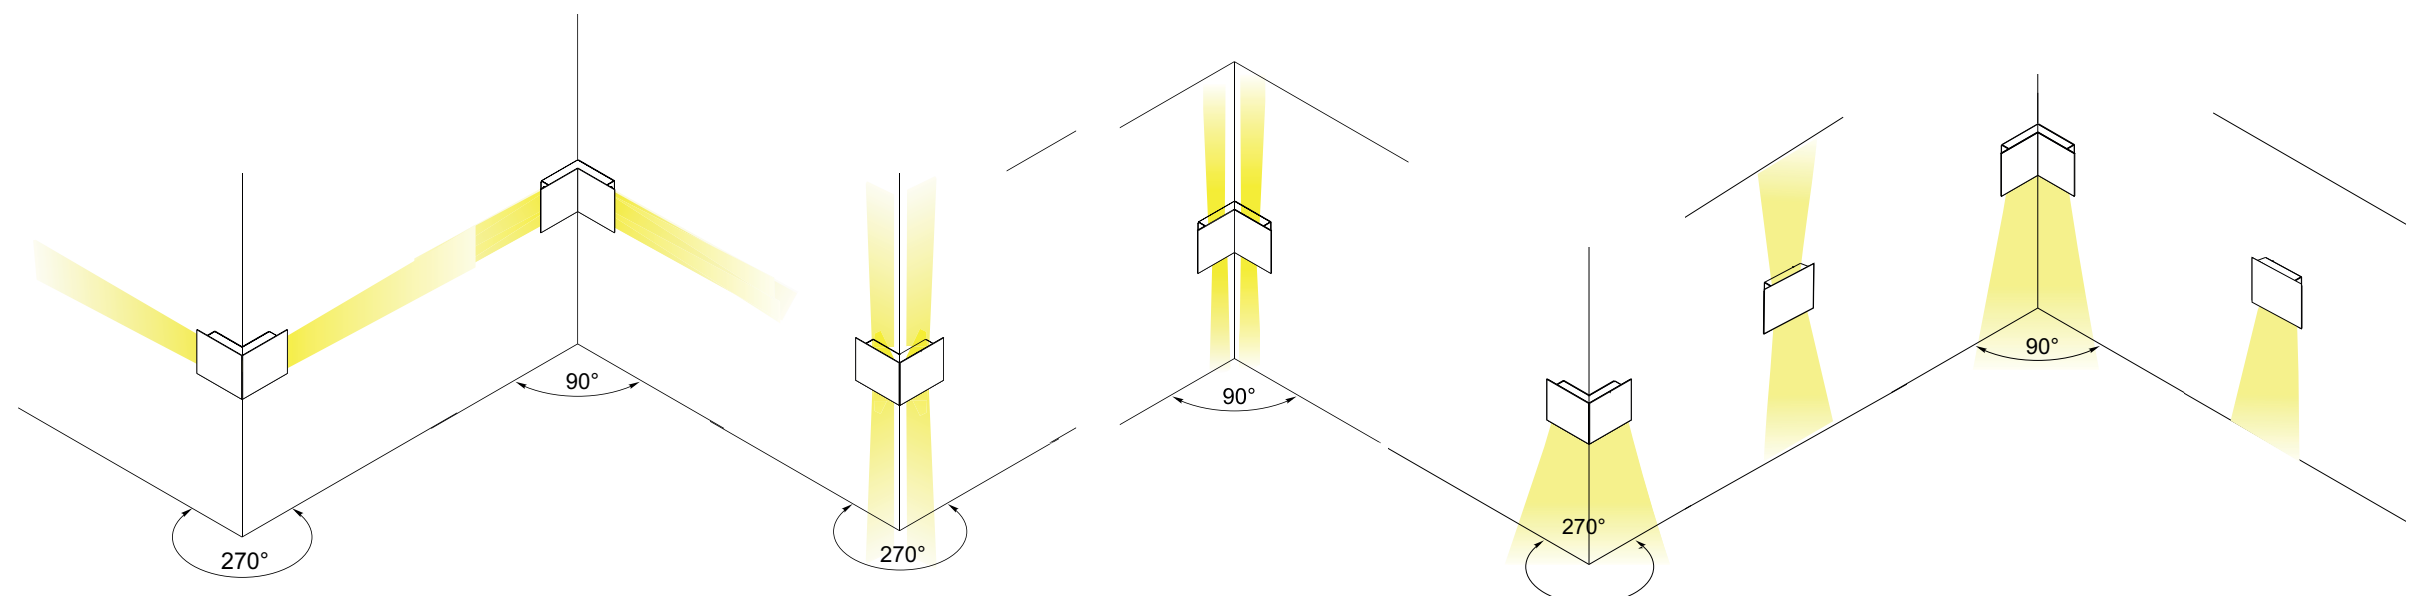

OUTDOOR

E 90 ANGOLO INTERNO | INTERNAL ANGLE

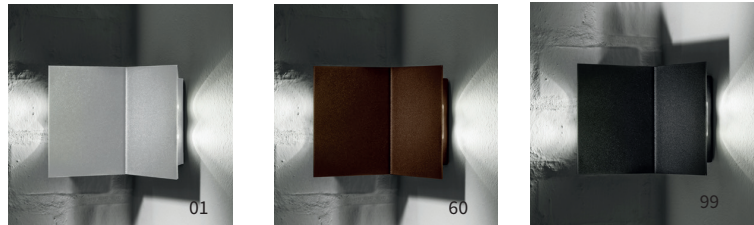

BIEMISSIONE ORIZZONTALE - HORIZONTAL DOUBLE EMISSION


LED W	Kg	lm product/beam/3000K 14°	CODE
2x3	0,82	500	LT7101.8 ● S/##
2x13	0,82	1380	MN003P.9 ● /##

BIEMISSIONE VERTICALE - VERTICAL DOUBLE EMISSION



LED W	Kg	lm product/beam/3000K 14°	CODE
2x3	0,82	500	
2x13	0,82	1380	MN004P.9 ● /##

MONOEMISSIONE VERTICALE - VERTICAL SINGLE EMISSION

LED W	Kg	lm product/beam/3000K 14°	CODE
3	0,78	250	LT7103.8 ● S/##
13	0,78	690	MN005P.9 ● /##

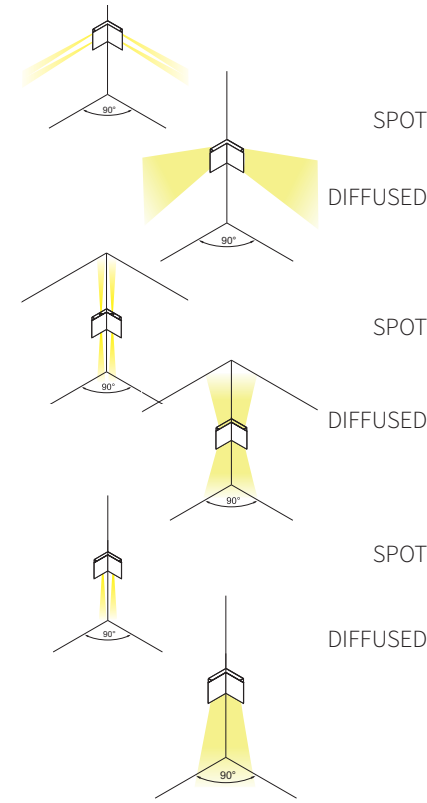

E 270 ANGOLO ESTERNO | EXTERNAL ANGLE

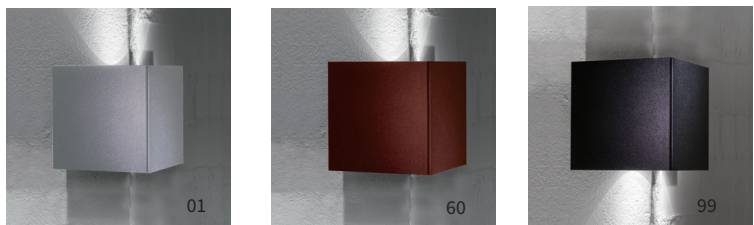

BIEMISSIONE ORIZZONTALE - HORIZONTAL DOUBLE EMISSION


LED W	Kg	lm product/beam/3000K 14°	CODE
2x3	0,82	500	LT7001.8 ● S/##
2x13	0,82	1380	MN000P.9 ● /##

BIEMISSIONE VERTICALE - VERTICAL DOUBLE EMISSION

LED W	Kg	lm product/beam/3000K 14°	CODE
2x3	0,82	500	LT7005.8 ● S/##
2x13	0,82	1380	MN001P.9 ● /##


MONOEMISSIONE VERTICALE - VERTICAL SINGLE EMISSION

LED W	Kg	lm product/beam/3000K 14°	CODE
3	0,78	250	LT7003.8 ● S/##
13	0,78	690	MN002P.9 ● /##

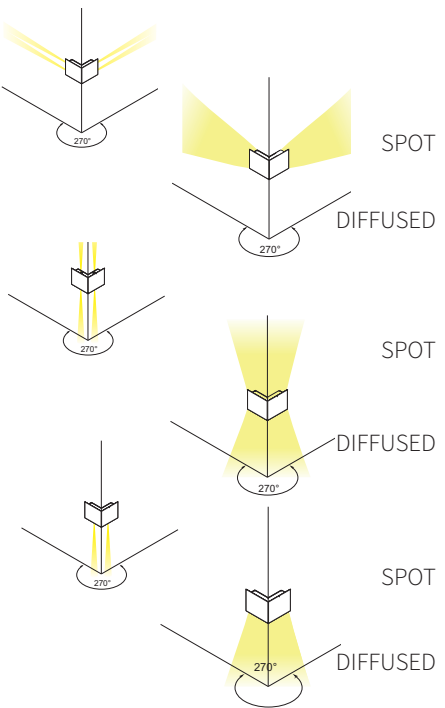

E PARETE | WALL

Posizionabile anche in orizzontale | possible to be installed horizontally

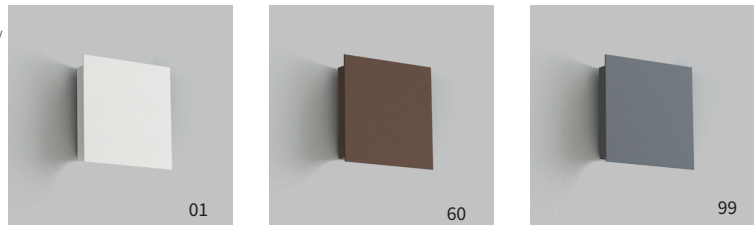


SINGLE EMISSION

LED W	Kg	lm product/beam/3000K 14°	CODE
3	0,52	250	LT7201.8 ● S/##
13	0,52	690	MN006P.9 ● /##



DOUBLE EMISSION

LED W	Kg	lm product/beam/3000K 14°	CODE
2x3	0,56	500	LT7301.8 ● S/##
2x13	0,56	1380	MN007P.9 ● /##

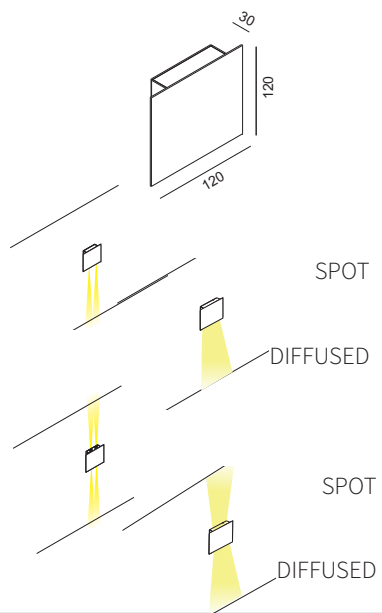


CURVE FOTOMETRICHE/ PHOTOMETRIC DATA

SPOT VERSION



DIFFUSED VERSION



VERSIONI DISPONIBILI/AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- FASCIO/BEAM
- S SPOT 14°

/## FINITURA/FINISHING

- 01 bianco | white
- 60 corten | corten
- 99 grafite | graphite

COMPOSIZIONE CODICE: xxx.x ●●/##

HOW TO CREATE THE CODE: F1000.827S/01

CODE
F1000.8 | 27 | S | 01
base code kelvin beam finishing

OUTDOOR

PHAR OUTDOOR

Proiettore professionale da parete e soffitto per esterno completo di sorgente COB LED con ottica da 38°, disponibili anche nella versione dimmerabile dali e taglio di fase ed in versione per orticoltura. Corpo e gruppo ottico di sezione cilindrica in estruso di alluminio verniciato. Snodi meccanici in acciaio. Orientabilità del gruppo ottico dalla posizione di riposo verticale di 355° sull'asse verticale e da 0° a 90° su quello orizzontale. Mantenimento della posizione grazie al blocco di puntamento.

Professional wall and ceiling outdoor projectors complete with COB LED source with 38° optic, available in DALI dimmable, phase cut version and horticulture version also. Cylindrical body and optical group in painted extruded aluminum. Mechanical steel joints. Adjustability of the optical unit from the vertical rest position of 355° on the vertical axis and from 0° to 90° on the horizontal one. Lockable pointing position.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



HORTICULTURE Disponibili versioni LED HC (Horticulture) a spettro dedicato alle piante ornamentali / HC (Horticulture) LEDs that emit a spectrum tailored to ornamental plants.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K
HC		HORTICULTURE


FASCIO/BEAM

S		SPOT 15°
F		FLOOD 24°
W		WIDE 38°


FINITURE STANDARD /STANDARD FINISHINGS

/01		BIANCO/WHITE
/02		NERO/BLACK
/49		BRONZO/BRONZE

CURVE FOTOMETRICHE/PHOTOMETRIC DATA



PHAR 90 PARETE/SOFFITTO WALL/CEILING PROJECTOR



LED W	Ø	H	Kg	lm product/beam.3000K W38°	CODE
32	90	180	1,6	2955	PH156IP.9 /##

VERSIONI DISPONIBILI/AVAILABLE VERSION

KELVIN

27	2700K
30	3000K
35	3500K
40	4000K

FASCIO/BEAM

	W Wide 38°
--	------------

DIMMABLE (OPTIONAL)

D	Dali
---	------

/## FINITURA/FINISHING

	/01 bianco white
	/02 nero black
	/49 bronzo/bronze