




MANINE



Apparecchi a parete mono o biemissione per illuminazione d'accento e di pareti ed angoli. Gruppo ottico completo di sorgenti LED professionali, con alimentazione integrata. Disponibili in versione ad angolo interno 90°, ad angolo esterno 270° oppure piatta. Corpo in metallo finitura verniciata. Grado di protezione IP40.

Single or double emission wall mounted luminaires for wall enhancing and corner lighting. Optical unit complete with professional LED sources, with integrated power supply. Available in 90° internal angle, 270° external angle or flat version. Painted finish metal body. IP40.

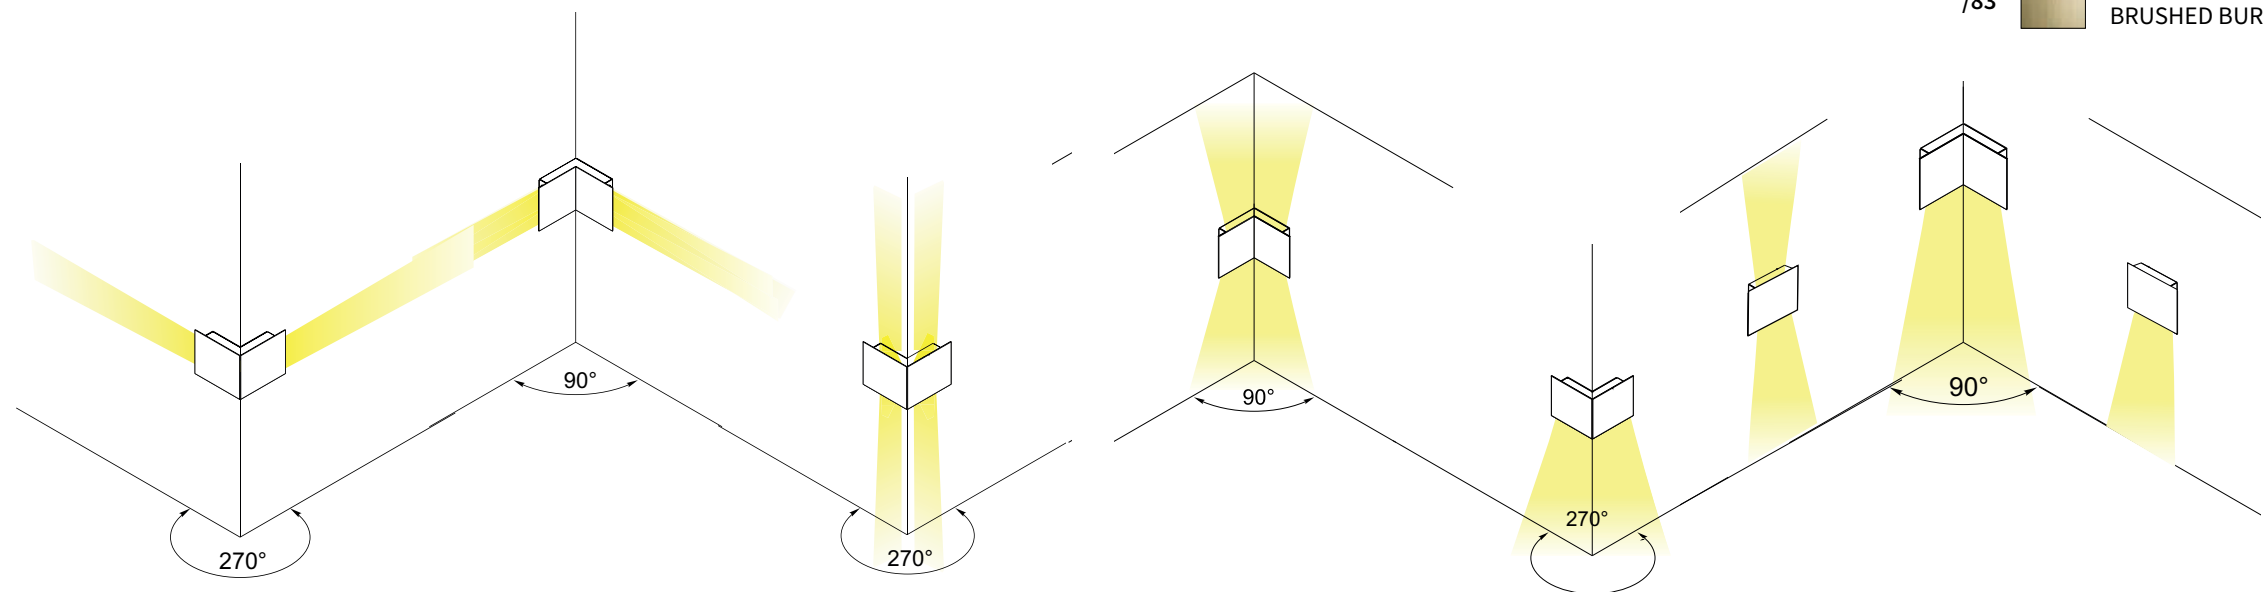

UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FASCIO STRETTO / NARROW BEAM



FASCIO LARGO / WIDE BEAM

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO/BEAM



SPOT



DIFFUSED

FINITURE STANDARD /STANDARD FINISHINGS






/01		BIANCO/WHITE
/02		NERO/BLACK
/60		CORTEN/CORTEN

FINITURE PREMIUM /PREMIUM FINISHINGS

/81		ORO ROSA/ROSE GOLD
/82		BRONZO ANTICATO/ ANTIQUE BRONZE
/83		OTTONE BRUNITO SPAZZOLATO/ BRUSHED BURNISHED BRASS


SPOT

MANINE 90 ANGOLO INTERNO | INTERNAL ANGLE




BIEMISSIONE ORIZZONTALE - HORIZONTAL DOUBLE EMISSION

LED		lm product/beam/3000K	
W	Kg	S14°	CODE
2x3	0,82	368	LT7100.8 ● S/##



BIEMISSIONE VERTICALE - VERTICAL DOUBLE EMISSION





LED		lm product/beam/3000K	
W	Kg	S14°	CODE
2x3	0,82	368	LT7104.8 ● S/##



MONOEMISSIONE VERTICALE - VERTICAL SINGLE EMISSION


LED		lm product/beam/3000K	
W	Kg	S14°	CODE
3	0,78	184	LT7102.8 ● S/##

MANINE 270 ANGOLO ESTERNO | EXTERNAL ANGLE




BIEMISSIONE ORIZZONTALE - HORIZONTAL DOUBLE EMISSION

LED		lm product/beam/3000K	
W	Kg	S14°	CODE
2x3	0,82	368	LT7000.8 ● S/##



BIEMISSIONE VERTICALE - VERTICAL DOUBLE EMISSION






LED		lm product/beam/3000K	
W	Kg	S14°	CODE
2x3	0,82	368	LT7004.8 ● S/##



MONOEMISSIONE VERTICALE - VERTICAL SINGLE EMISSION

LED		lm product/beam/3000K	
W	Kg	S14°	CODE
3	0,78	184	LT7002.8 ● S/##


MANINE PARETE | WALL



SINGLE EMISSION

LED		lm product/beam/3000K	
W	Kg	S14°	CODE
3	0,52	184	LT7200.8 ● S/##

Posizionabile anche in orizzontale. | possible to be installed horizontally





DOUBLE EMISSION

LED		lm product/beam/3000K	
W	Kg	S14°	CODE
2x3	0,56	368	LT7300.8 ● S/##



CURVE FOTOMETRICHE/
PHOTOMETRIC DATA

SPOT VERSION



VERSIONI DISPONIBILI/AVAILABLE VERSION

- KELVIN
 - 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K
- FASCIO/BEAM
 - S Spot 14°

/ ## FINITURA/FINISHING

- 01 bianco / white
- 60 corten / corten
- 99 grafite / graphite



COMPOSIZIONE CODICE: xxx.x●●/##

HOW TO CREATE THE CODE: F1000.827S/01

CODE
F1000.8 27 S / ## — finishing
base code kelvin beam

DIFFUSED

MANINE 90 ANGOLO INTERNO |
INTERNAL ANGLE

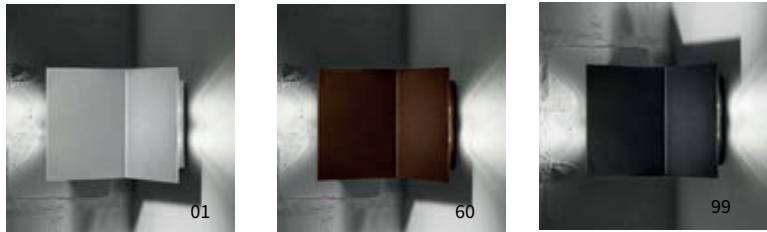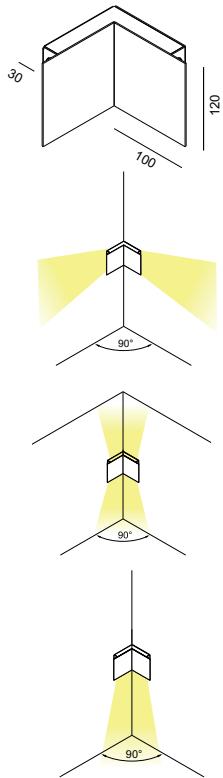

BIEMISSIONE ORIZZONTALE HORIZONTAL DOUBLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
2x13	0,82		1380	MN003.9 ● /##	



BIEMISSIONE VERTICALE VERTICAL DOUBLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
2x13	0,82		1380	MN004.9 ● /##	

MONOEMISSIONE VERTICALE VERTICAL SINGLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
13	0,78		690	MN005.9 ● /##	

MANINE PARETE | WALL

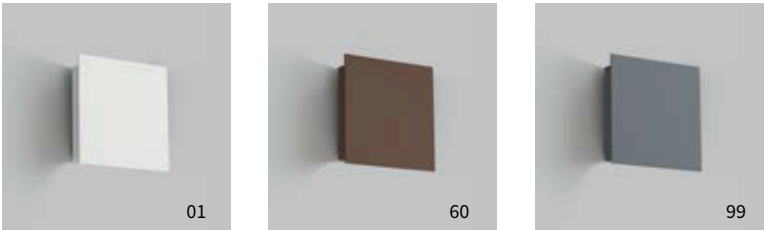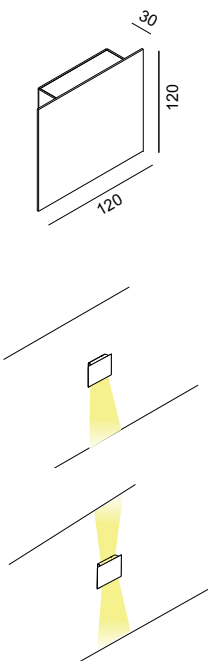

SINGLE EMISSION



LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
13	0,52		690	MN006.9 ● /##	

Posizionabile anche in orizzontale. | possible to be installed horizontally

DOUBLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
2x13	0,56		1380	MN007.9 ● /##	

MANINE 270 ANGOLO ESTERNO |
EXTERNAL ANGLE

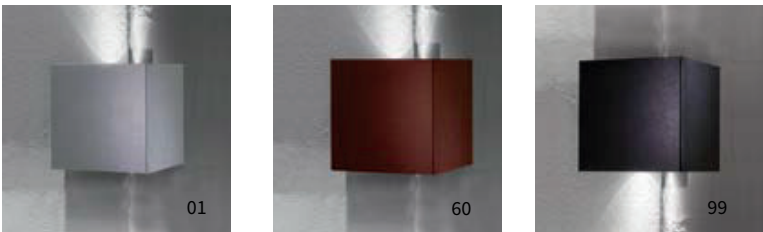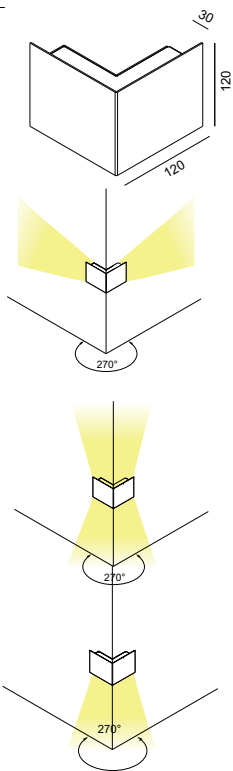

BIEMISSIONE ORIZZONTALE HORIZONTAL DOUBLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
2x13	0,82		1380	MN000.9 ● /##	

BIEMISSIONE VERTICALE VERTICAL DOUBLE EMISSION


LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
2x13	0,82		1380	MN001.9 ● /##	

MONOEMISSIONE VERTICALE VERTICAL SINGLE EMISSION

LED			lm product/beam/3000K		
W	Kg		30x100°	CODE	
13	0,78		690	MN002.9 ● /##	



CURVE FOTOMETRICHE/ PHOTOMETRIC DATA



VERSIONI DISPONIBILI/AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

/## FINITURA/FINISHING

- /01 bianco | white
- /60 corten | corten
- /99 grafite | graphite

COMPOSIZIONE CODICE: xxx.x ● /##

HOW TO CREATE THE CODE: F1000.8 27 /01

CODE
F1000.8 ● /## — finishing
base code kelvin