



MINIFRAME

Apparecchio da incasso fisso per sorgente LED integrate o per lampade LED GU10 230V / 240V. Alimentazione remota disponibile come accessorio per sorgenti LED intergrate. Corpo e cornice di battuta in metallo verniciato. Installabile, anche, in pareti e soffitti in calcestruzzo o laterizio mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20 / IP23.

Fixed recessed luminaire for integrated LED source or for GU10 230V / 240V LED Light bulb. Remote power supply available as accessory for the integrated LED sources. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20 / IP23.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION




PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL




GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED




IDONEI PER CARTONGESSO O LATERIZIO / CALCESTRUZZO CON APPOSITA CASSAFORMA OPZIONALE
SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE WITH THE OPTIONAL BOX



SORGENTE LED DISPONIBILE GU10 LIGHT SOURCE AVAILABLE

KELVIN	
27	2700°K
30	3000°K
35	3500°K
40	4000°K


FASCIO / BEAM





FINITURE STANDARD / STANDARD FINISHINGS




FINITURE PREMIUM / PREMIUM FINISHINGS

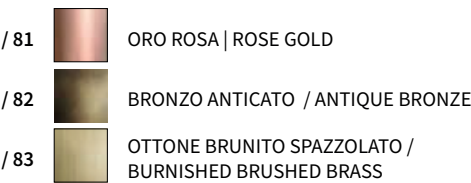

CURVE FOTOMETRICHE / PHOTOMETRIC DATA

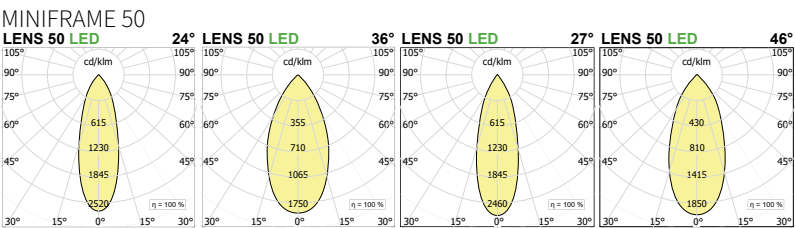

MINIFRAME 35



52X52 0-25 CRI >90 IP20 A 5 UK CA CE




SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

500

LED	mA	H	Im product / beam 3000K	CODE
W			F22°	
5	500	110	520	LT4102.9 ● F / ##

● disponibile solo fascio F available only F beam

MINIFRAME 50

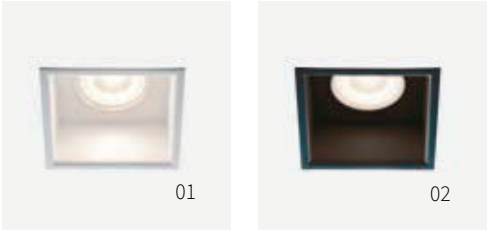

72X72 0-25 CRI >90 IP20 A 5 UK CA CE

SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

250 350

LED	mA	Dim.	Lmm	Im product / beam 3000K	CODE
W				F24° W36°	
8	250	80x80	110	860	1289
12	350	80x80	110	1289	1289
					LT4117.9 ● ● / ##

LED	mA	Dim.	Lmm	Im product / beam 3000K	CODE
W				F27° W46°	
12	350	80x80	130	1289	1289
18	500	80x80	130	1575	1579
					LT4118.9 ● ● / ##




PER CARTONGESSO E LATERIZIO - FOR PLASTERBOARD AND CONCRETE

GU10 LED 230V	Dim.	Lmm	CODE
W			
1x max 50	80x80	35+lampadina	LT4104 / ##

Accessori Accessories:
LT4102.CC Cassaforma per laterizio Wallbox for brickwaal

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

CASSAFORMA MINIFRAME 50 GU10 PER LATERIZIO WALLBOX MINIFRAME 50 GU10 FOR BRICK WALL




	Dim.	H	CODE
MINIFRAME 50	190X76	130	LT4102.CC

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN


27 2700K
30 3000K
35 3500K
40 4000K

● FASCIO / BEAM




Per i gradi vedere in tabella -
For degrees check the table

/ ## FINITURA | FINISHING



/ ## FINITURA PREMIUM | PREMIUM FINISHING



COMPOSIZIONE CODICE: xxx.x ● ● / ##
HOW TO CREATE THE CODE: F1000.827S / 01

CODE
F1000.8 ● ● / ## — finishing
base code kelvin beam

250 350 500

DRIVERS VEDI | SEE P.452